

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.



INSTALLATION STEPS:

SINGLE FIXTURE INSTALLATION:


- 1. **WARNING: Electrical shock hazard.**  
Ensure the mains voltage supply is turned OFF before making any connections to the fixture. Do not turn the mains power supply back on untill all necessary electrical connections are made and fixture is closed.  
Make all necessary electrical connections according to all relevant electrical codes.

Remove ceiling tiles where the fixture will be installed as well as the adjacent tiles for easy access during installation.


- 2. Raise the fixture above the ceiling and lower it onto the T-bars.

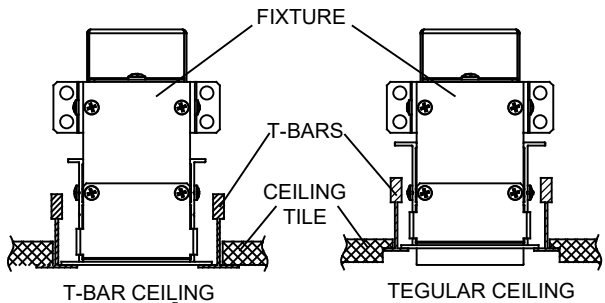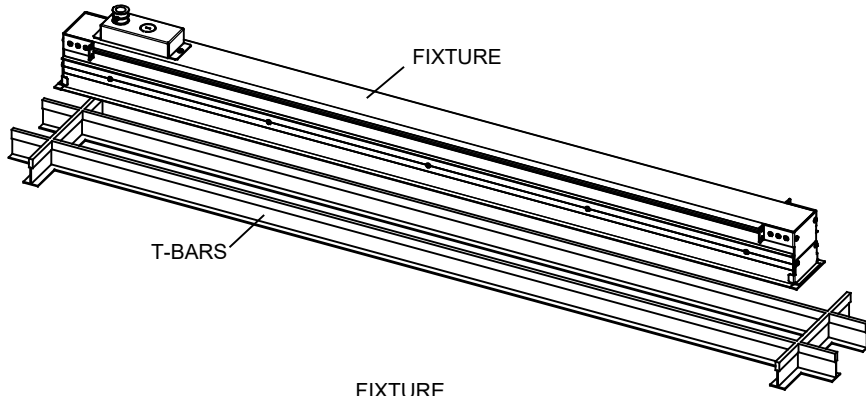

- 3. Attach safety wires to the fixture tabs.

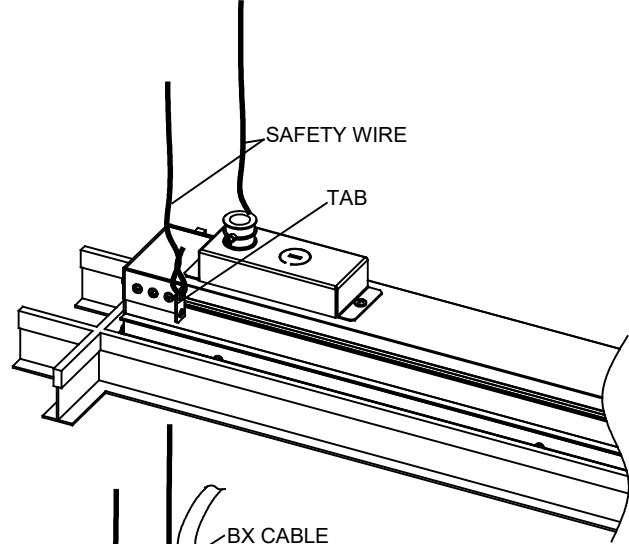

- 4. Remove the power box from the top of the fixture. Install BX cable (by others) through the metal conduit connector (by others) and install onto the power box. Make electrical connections between wires of BX cable and fixture wires according to the wires labeling. Place connected wires inside the power box. Reinstall the power box to the fixture.

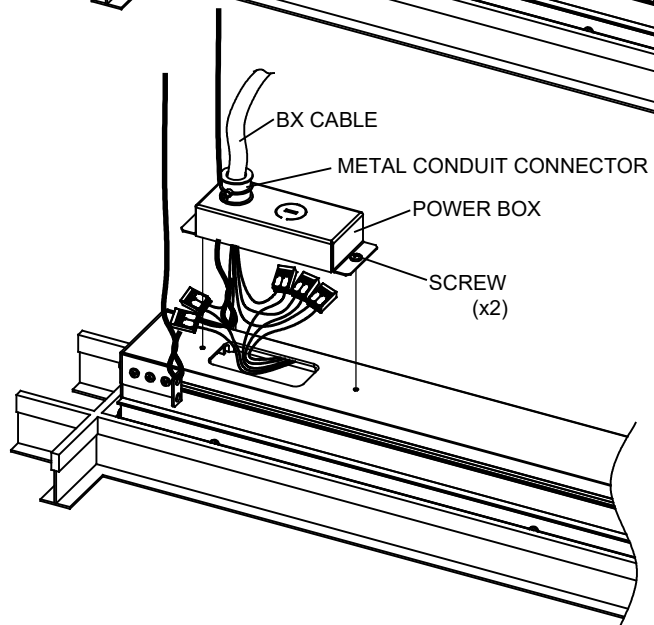

FIXTURE DESCRIPTION: BLFR2R



- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

5. The power can safely be turned on now.

CONTINUOUS FIXTURE INSTALLATION:

6. Start from the first section with the power box. Repeat steps 1, 2, 3 and 4.


7. Rase the next section above the ceiling and lower it onto the T-bars.

8. Make the wiring connection between both sections using connectors.

9. Join both sections together by sliding the section into the guiding plates (x2) on the installed section and fastening four screws and lock washers.

10. Attach safety wires to the section tabs.

11. When all sections of the fixture are installed, the power can safely be turned on .

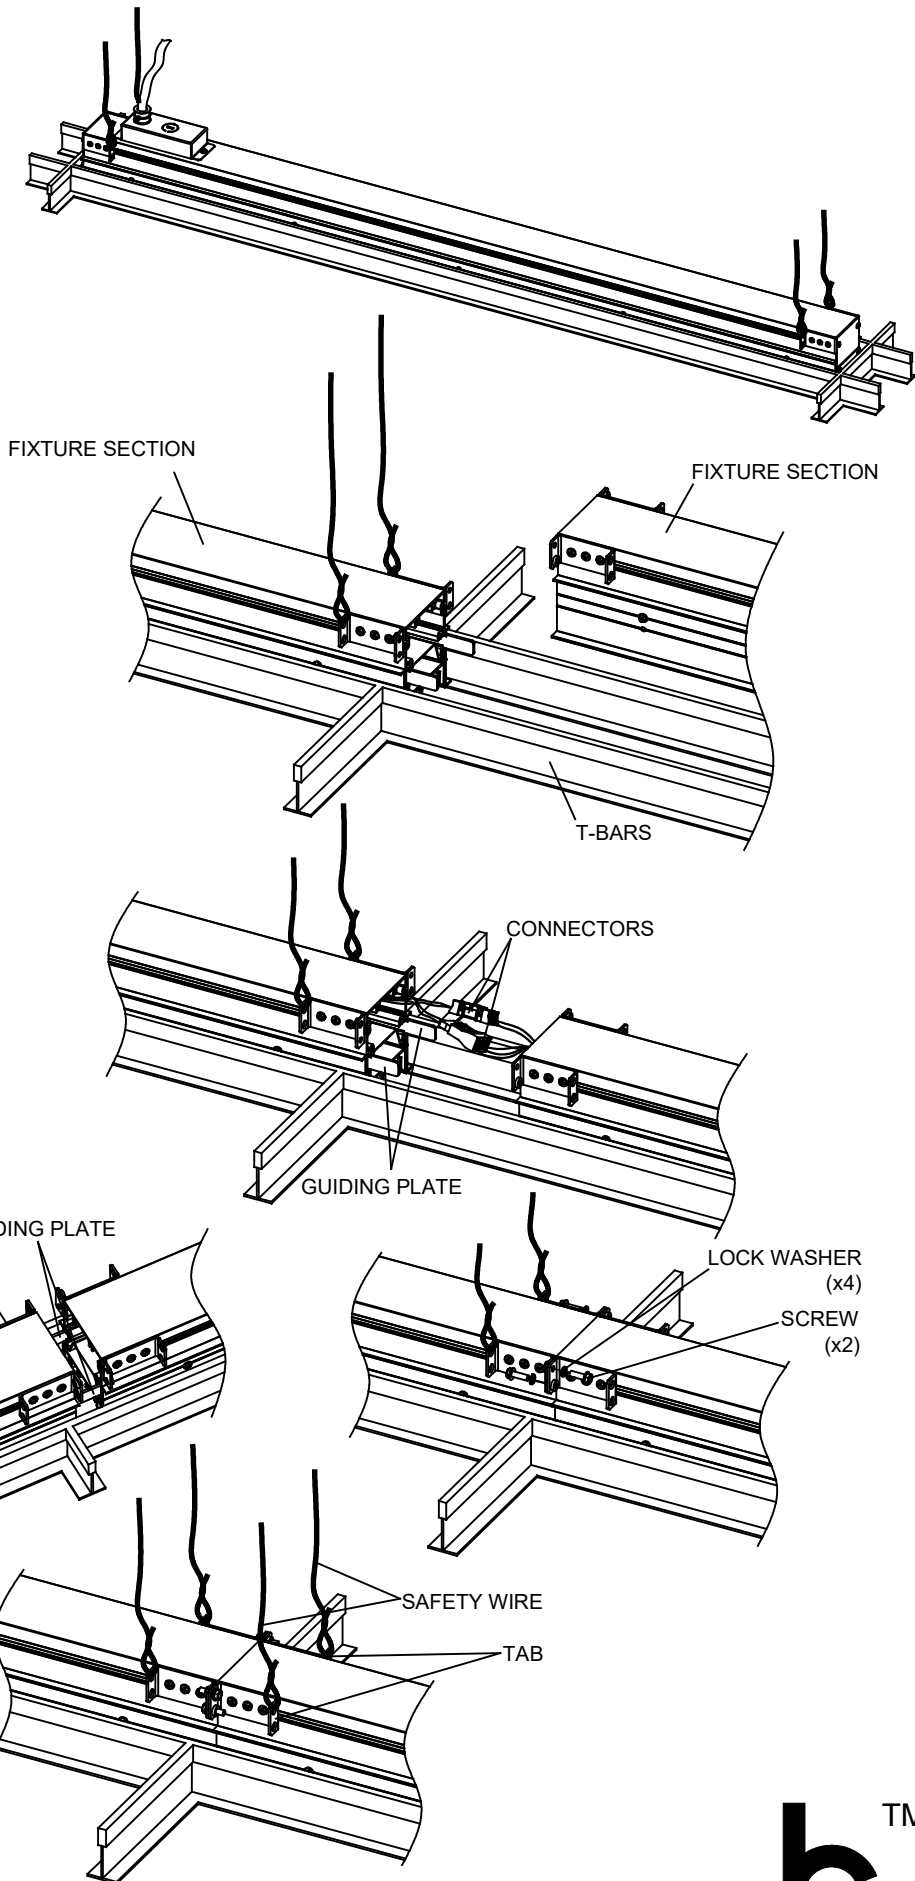

FIXTURE DESCRIPTION: BLFR2R

