




# RODEO SOLO™

## SHORT SPECIFICATION SHEET

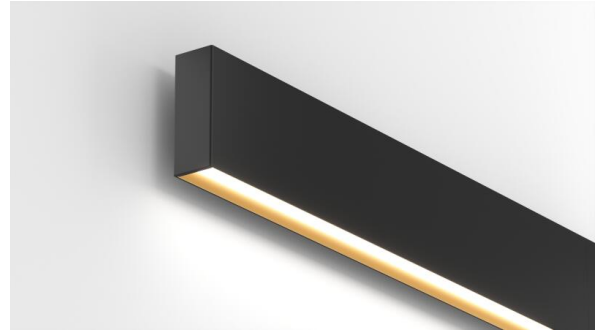

Fixture Type

Fixture Code

Quantities

### 1 HOW TO ORDER

#### 1. LUMINAIRE

**RDSW1W** Direct

**RDSW2W** Direct/Indirect

One power cord for every 50 linear feet.

#### 2. LENGTH OF RUN

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

**SFA\_ \_ \_ \_**

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

### 3. MAX LENGTH PER SECTION

<b>SL04</b> 4ft	<b>SL06</b> 6ft	<b>SL08</b> 8ft	<b>SL10</b> 10ft
<b>SL12</b> 12ft			

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact [sales@betacalco.com](mailto:sales@betacalco.com).

### 4. LM/FT (DIRECT)

<b>LPF030</b> 300 lm/ft	<b>LPF050</b> 500 lm/ft	<b>LPF070</b> 700 lm/ft	<b>LPF090</b> 900 lm/ft
-------------------------	-------------------------	-------------------------	-------------------------

Consult website for available lumens/ft.

### 5. LM/FT (INDIRECT)

<b>LPG000</b> Not required	<b>LPG030</b> 300 lm/ft	<b>LPG050</b> 500 lm/ft	<b>LPG070</b> 700 lm/ft
<b>LPG090</b> 900 lm/ft	<b>LPG110</b> 1100 lm/ft		

Consult website for available lumens/ft.

### 6. CRI

**CR90** CRI 90+

### 7. CCT

<b>CTA27</b> 2700K	<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------	--------------------

### 8. DIRECT DIFFUSER

**DD4** Comfort diffuser

### 9. UPLIGHT DIFFUSER

<b>UD0</b> Not required	<b>UD2</b> Opal diffuser	<b>UD3</b> Asymmetric diffuser <sup>1</sup>
-------------------------	--------------------------	---

<sup>1</sup> Available up to 900 lm/ft. The asymmetric distribution will be directed away from the wall.

### 10. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>	<b>V3</b> 347V <sup>2</sup>	<b>V4</b> Low Voltage <sup>3</sup>
--------------------	-----------------------------	-----------------------------	------------------------------------

<sup>1</sup> Not available in North America or with CS2 (Dual Circuit).

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.

## 11. FIXTURE DIMMING

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA02</b> 0-10V Dimming 0.1% <sup>1</sup>	<b>DA20</b> DALI Dimming 0.1% <sup>1</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>1</sup>
<b>DA30</b> DSI/switchDim <sup>2</sup>	<b>DA45</b> PoE <sup>3</sup>		

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## 12. FIXTURE FINISH

<b>FA01</b> White – Textured	<b>FA02</b> Black Metallic – Textured	<b>FA20</b> Silver Metallic – Textured	<b>FA25</b> Gold Metallic – Textured
<b>FA27</b> Wood grain – Light Cherry <sup>1</sup>	<b>FA28</b> Wood grain – Dark Walnut <sup>1</sup>	<b>FA44</b> Midnight Blue Metallic – Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic – Textured	<b>FA47</b> Bronze Metallic – Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic – Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## 13. FIXTURE TRIM FINISH

<b>FC01</b> White	<b>FC24</b> Black Anodized	<b>FC58</b> Silver Anodized	<b>FC59</b> Gold Anodized
-------------------	----------------------------	-----------------------------	---------------------------

## 14. EMERGENCY

<b>E0</b> Not required	<b>E2</b> Emergency system – Remote <sup>1</sup>	<b>E3</b> Emergency generated circuit <sup>2</sup>
------------------------	--	--

<sup>1</sup> Only available with 0-10V 1% dimming. An extra power cord will be supplied to each section of the fixture when ordering emergency.

<sup>2</sup> A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

## 15. CIRCUITS

<b>CS1</b> Single circuit	<b>CS2</b> Dual circuit (Direct vs Indirect) <sup>1</sup>
---------------------------	---

<sup>1</sup> May be used under the following circumstances:

- 1) if ordering Emergency system
- 2) if required when ordering direct vs indirect

## 16. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.