CERCHIO™ - SUSPENDED



Project Name: Fixture Type:

Fixture Code: Quantities:

A. LUMINAIRE

 958010
 958020
 958020
 958030
 958030
 958040
 958040
 958040
 958040
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030
 958030

958140 958140 **958150** 958150

B. CCT/COLOR (DIRECT)

D30 3000K (min 80 CRI) **D35** 3500K (min 80 CRI) **D40** 4000K (min 80 CRI) **DRD** Red

DGN Green **DBL** Blue

C. CCT/COLOR (INDIRECT)

N30 3000K (min 80 CRI) **N35** 3500K (min 80 CRI) **N40** 4000K (min 80 CRI) **NRD** Red

NGN Green NBL Blue

D. SUSPENSION

S1 Vertical, Remote Driver (2 canopies **S2** Hub Remote Driver **S3** Vertical Integral Driver **S4** Hub Integral Driver

required for 84" dia. only)

Direct Only light distribution not available with S2 or S4 suspension for size 2134mm/84"

Direct/Indirect light distribution not available with S2, S3 or S4 suspension for sizes 1524mm/60" and larger

E. FINISH

BL Black **MS** Silver Metallic **WH** White

F. LUMEN REDUCTION

PR1 Lumen Reduction to approximately 50% of standard output PR2 Lumen Reduction to approximately 75% of standard output

G. DIMMING

DR DALI Dimming (1%) Remote only (EU only)

Not available in North America


H. OPTIONS

RE Remote Emergency System

CERCHIO™ - SUSPENDED

DIMENSIONAL DIAGRAMS


S1 Vertical Remote Driver

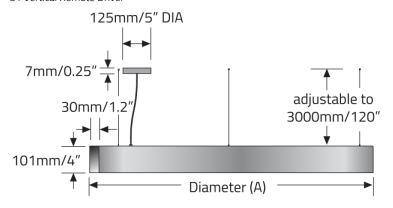

Direct/Indirect: 2 canopies required for 2134mm/84" only.


S3 Vertical Integral Driver



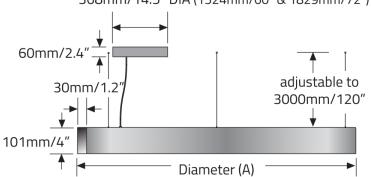

Direct/Indirect: Available up to 1219mm/48" DIA only.


S2 Hub Remote Driver

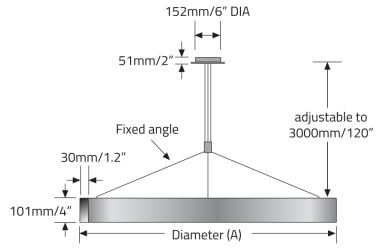

Direct: Available up to 1829mm/72" DIA only. **Direct/Indirect:** Available up to 1219mm/48" DIA only.

S4 Hub Integral Driver

280mm/11" DIA (914mm/36" & 1219mm/48") 368mm/14.5" DIA (1524mm/60" & 1829mm/72")

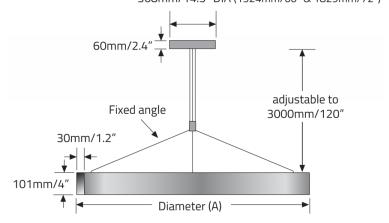

Direct: Available up to 1829mm/72" DIA only.

Direct/Indirect: Available up to 1219mm/48" DIA only.