

TIAL™ - SUSPENDED



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LIMINAIRE

271000 A Type, Direct, 2665 lms	271002 B Type, Direct, 3031 lms	271004 C Type, Direct, 3592 lms	271010 A Type, Direct/Indirect, 5954 lms
271020 B Type, Direct/Indirect, 6298 lms	271040 C Type, Direct/Indirect, 6854 lms		

Recommended minimum suspension length for direct/indirect version: 12" for White LEDs, 24" for Colored LEDs

B. CCT (DIRECT)

D30 3000K (min 80 CRI)	D35 3500K (min 80 CRI)	D40 4000K (min 80 CRI)
-------------------------------	-------------------------------	-------------------------------

C. CCT/COLOR (INDIRECT)

N30 3000K (min 80 CRI)	N35 3500K (min 80 CRI)	N40 4000K (min 80 CRI)	NRD Red
NGN Green	NBL Blue		

D. OPTIONS

EM Integral Emergency

E. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DE only.

F. OPTIONAL DIMMING


DE PoE

DE must be used with EV only.



TIAL™ - SUSPENDED

DIMENSIONAL DIAGRAMS


Type A pattern

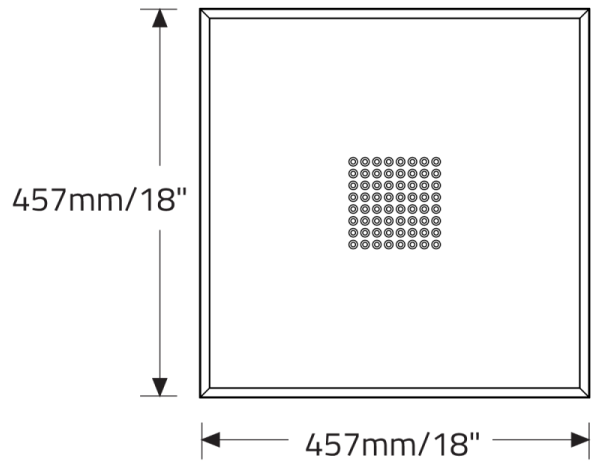

Type B pattern

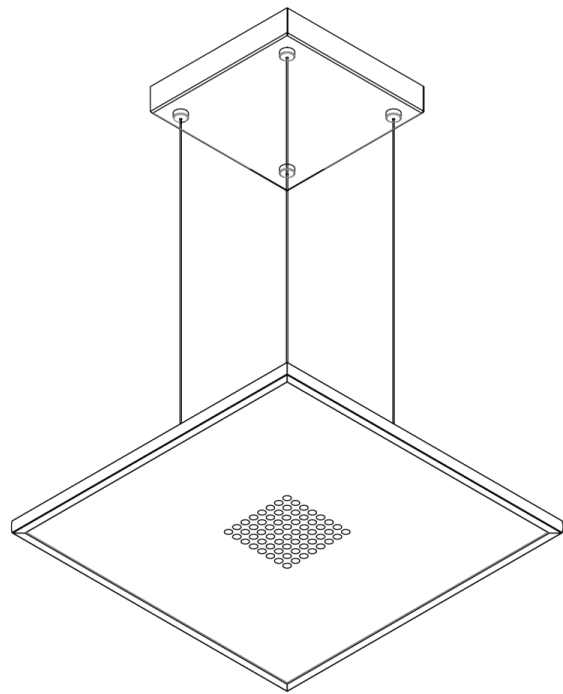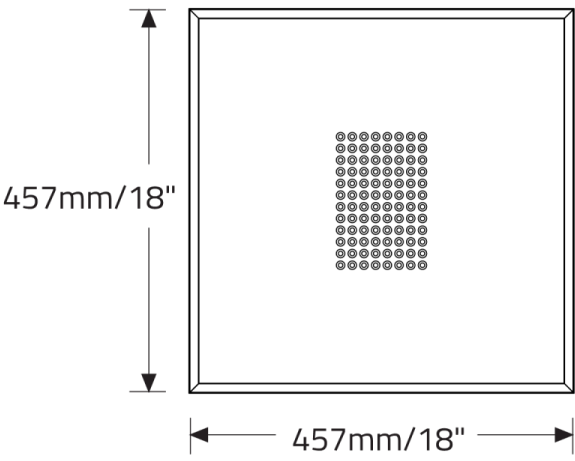



ISO VIEW

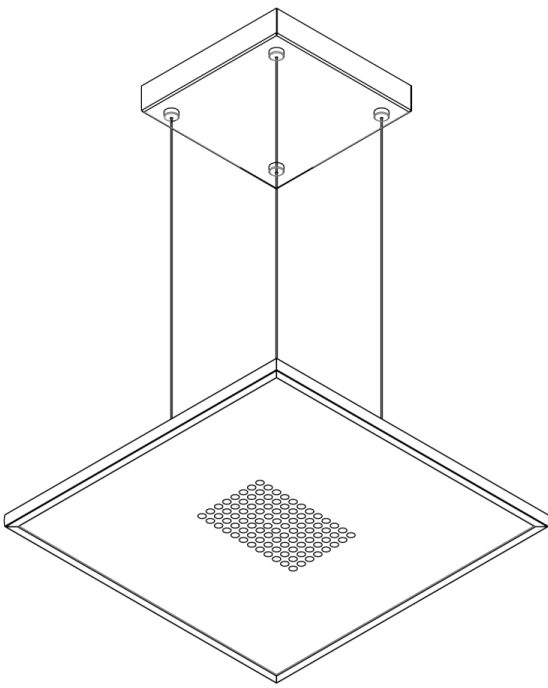

ISO VIEW


TIAL™ - SUSPENDED

Type C pattern

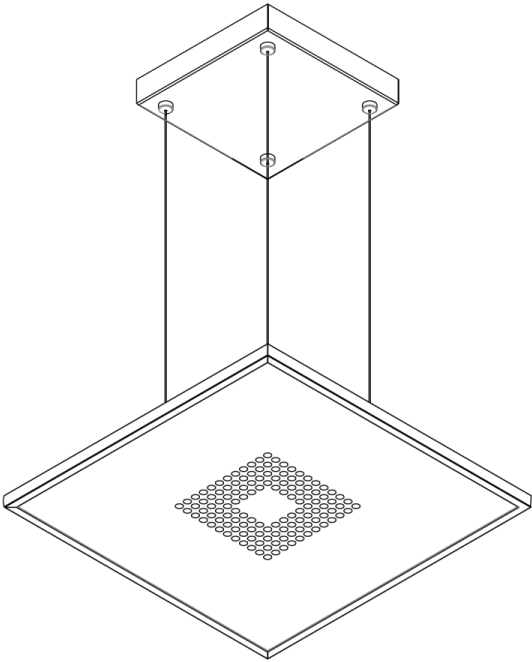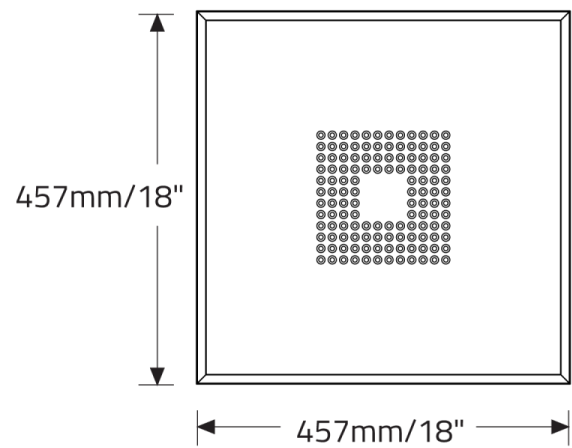


ISO VIEW

Direct only - Type A

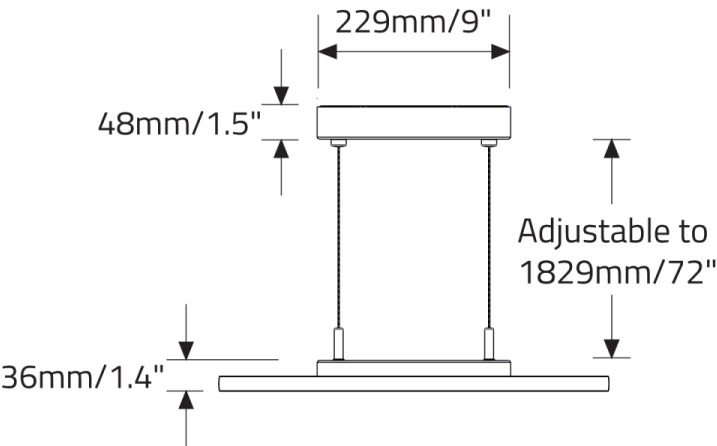


TIAL™ - SUSPENDED


Direct only - Type B

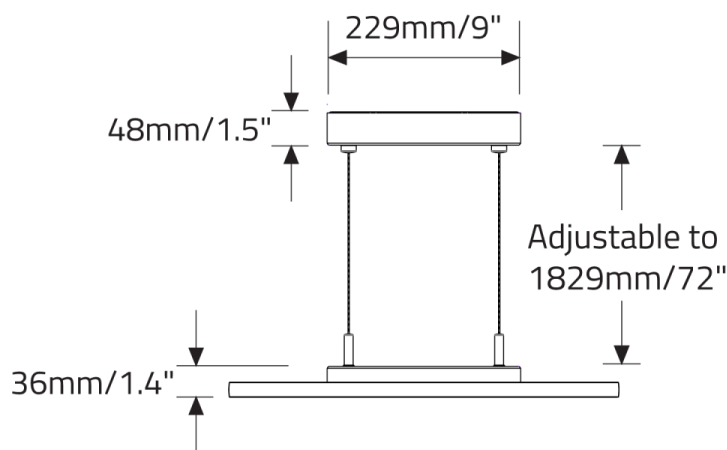



Direct only - Type C

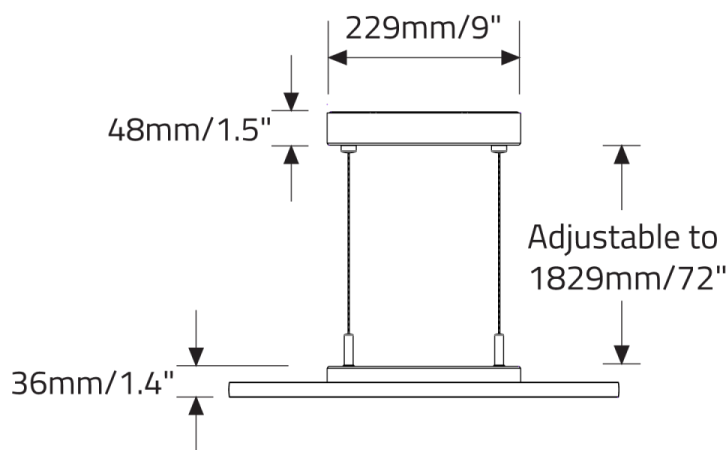


Direct/Indirect - Type A

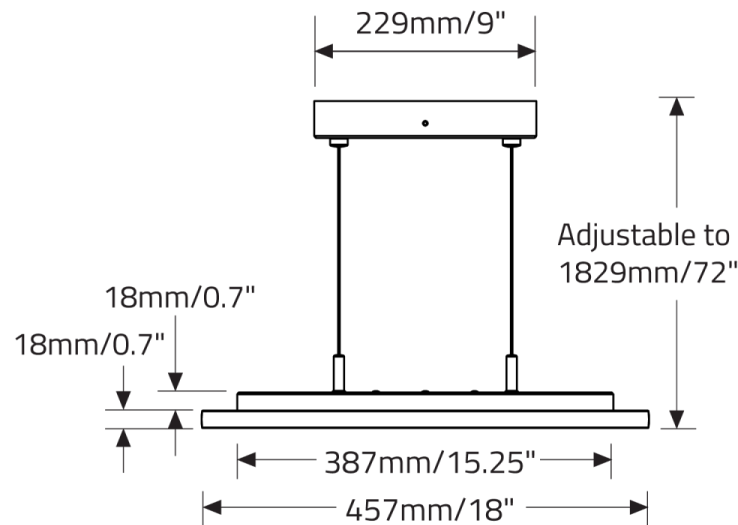

Direct/Indirect - Type B

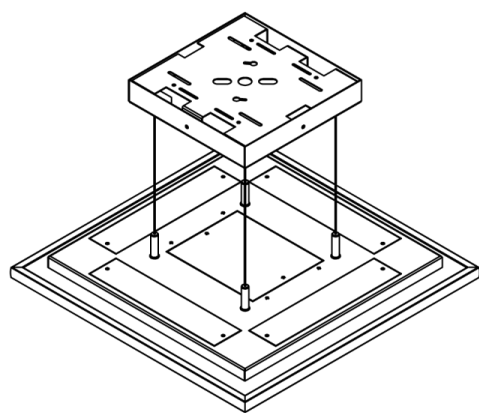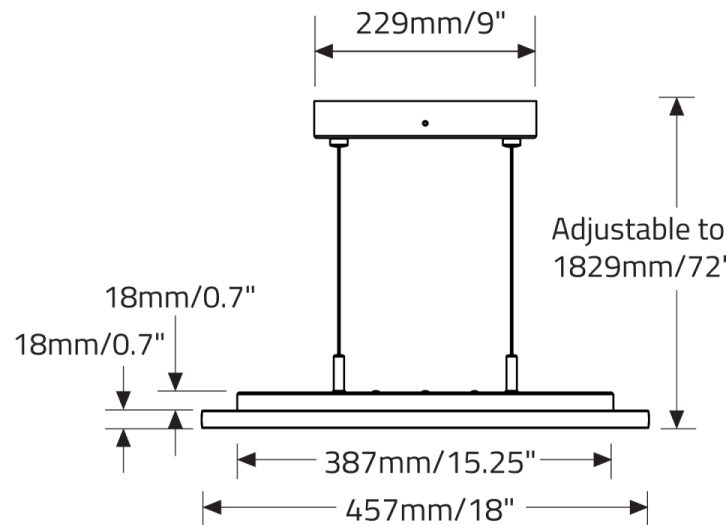



Uplight - ISO VIEW

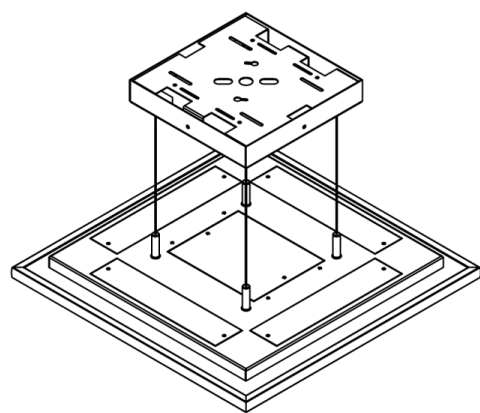

Uplight - ISO VIEW

TIAL™ - SUSPENDED

Direct/Indirect - Type C

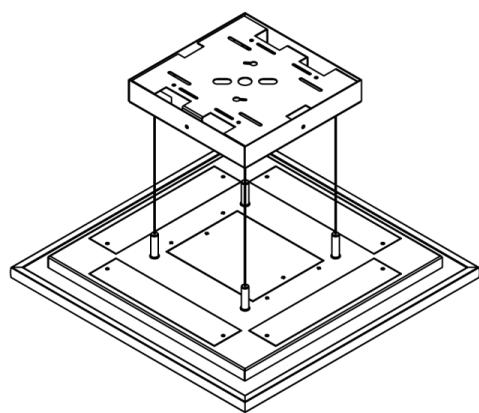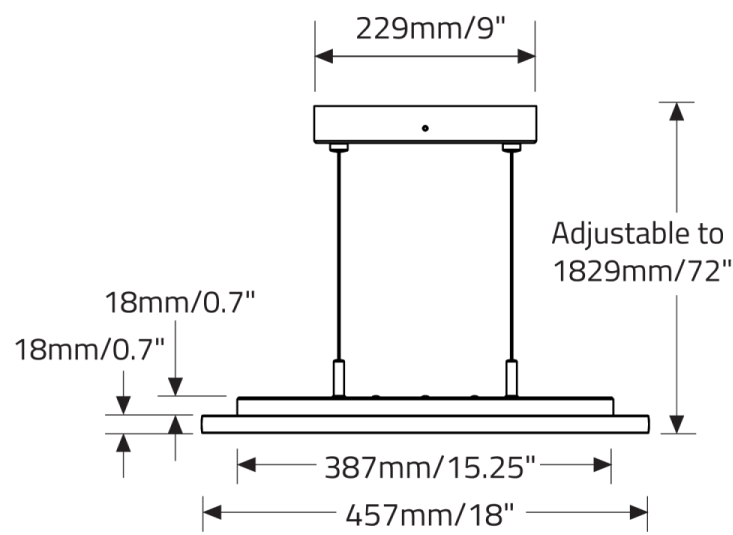

Uplight - ISO VIEW