



- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

**NOTE:**

This fixture is designed for installation in grid ceiling having T-bars.

**INSTALLATION STEPS:**

1. Remove neighboring ceiling plate and lift fixture into the opening.
2. Place fixture on the T-bars of the ceiling grid.
3. Use holes at corners of the fixture tile for extra securing the fixture to structure.
4. Provide electrical service, according to the National Electrical Code or your local electrical code, from a suitable junction box to the driver box of the fixture.
5. Remove the top cover by loosening two wing nuts. The fixture connectors bracket will accept flexible metal conduit.
6. Remove appropriate round knock-out(s) and connect flexible conduit to the connectors bracket with proper connector(s) (not included).
7. Place all connectors and excess wiring into the fixture and replace the top cover.
8. Replace the neighboring ceiling plate.

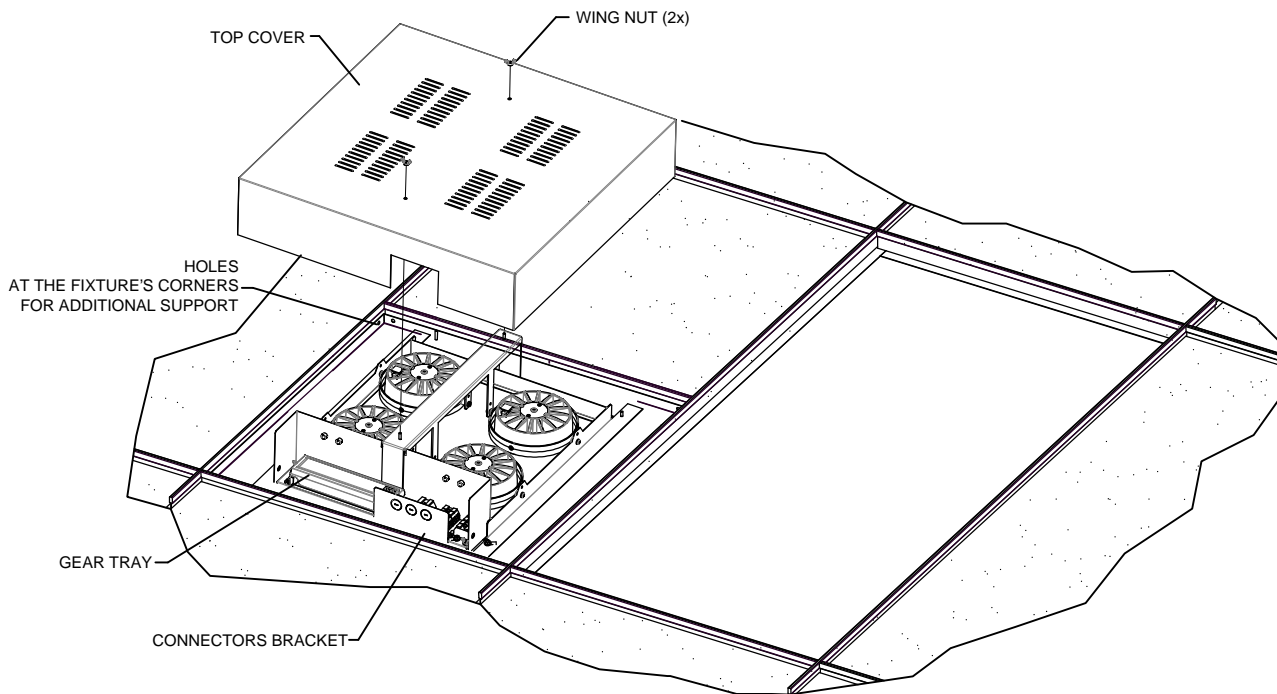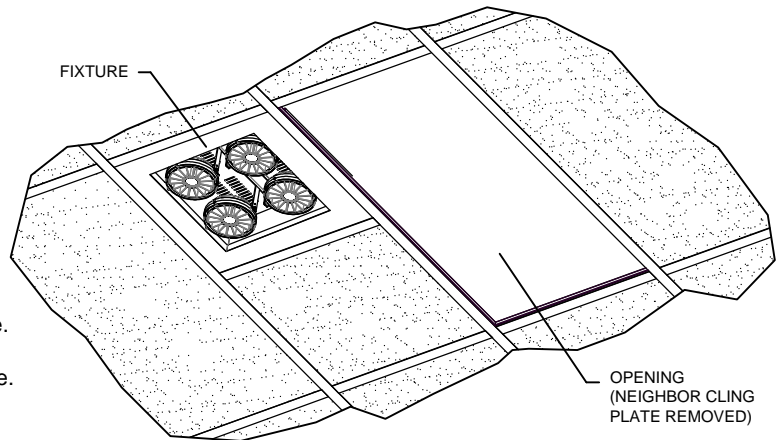

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: XACARA CT: 503140 ... 503143, 510331, 510332, 510334, 510335  
510334510335

BETA-CALCO INC. 25 Kodiak Crescent, TORONTO ONTARIO CANADA M3J 3E5