

- 1: These instructions may not cover all details or variations. For additional information contact Beta-Calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

SURFACE HOUSING INSTALLATION:-



WARNING: Electrical shock hazard. Ensure the mains voltage supply is turned OFF before making any connections. Do not turn the mains power supply back on until the wiring is completed.



Make all necessary electrical connections according to all relevant electrical codes.

1 Unfasten the 4 Pan Head Screws as shown in Fig-2 and separate ceiling plate assembly from rest of the fixture.

2 Mount the ceiling plate assembly(Fig-3) over the junction box to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling such a way that there is no gap between ceiling and ceiling plate assembly.

3. Make the appropriate electrical connections to the power supply.

4. Re-attach the fixture assembly with ceiling plate assembly and install 4 pan head screws.

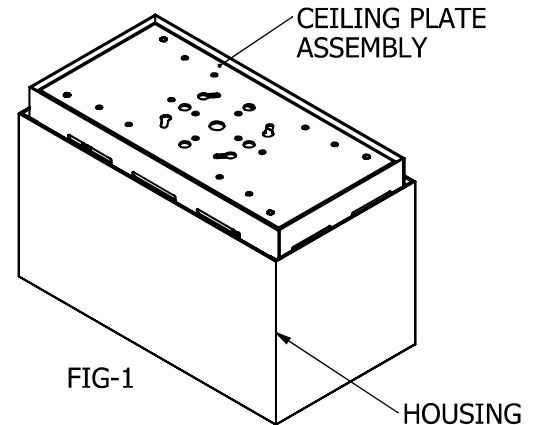


FIG-1

DO NOT MOUNT FIXTURE SOLELY ON JUNCTION BOX. USE MAXIMUM MOUNTING POINTS ON CEILING PLATE.

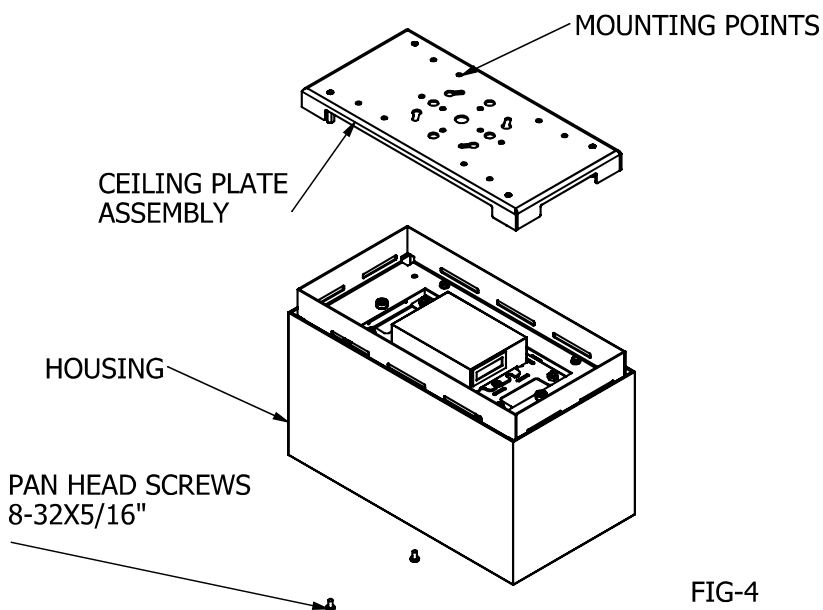


FIG-4

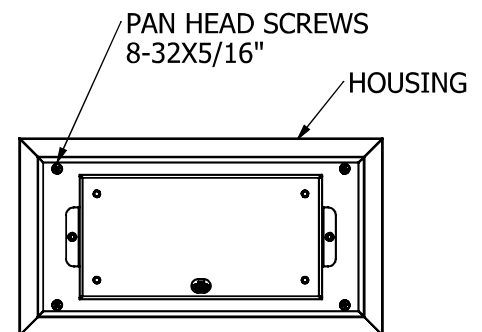


FIG-2

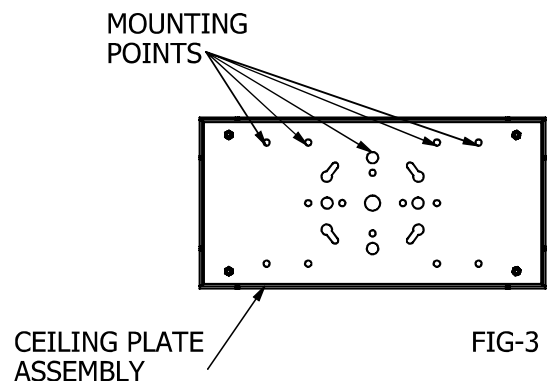


FIG-3