




WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

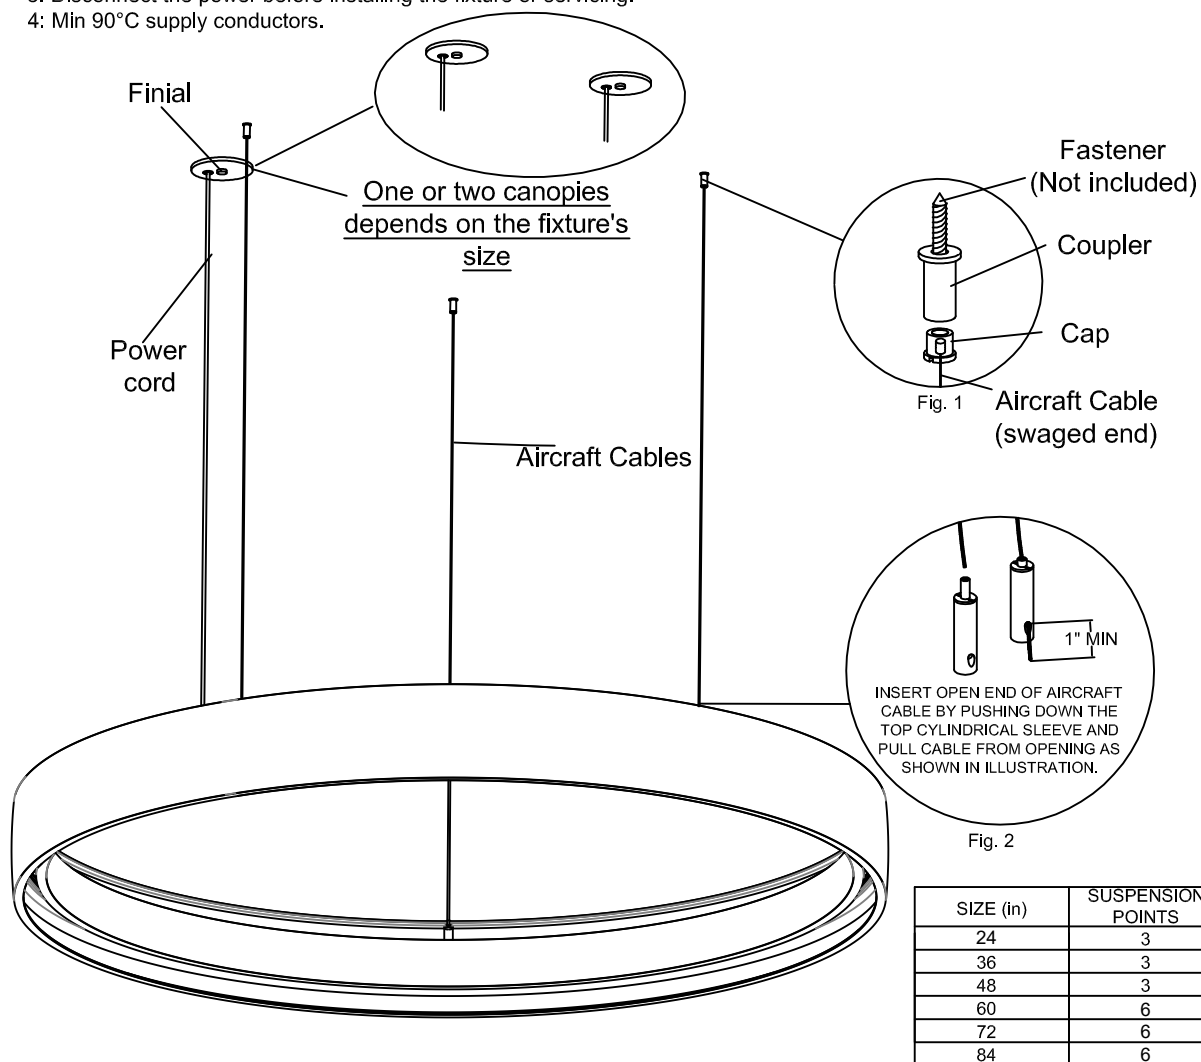

INSTALLATION INSTRUCTIONS FOR TYPE "P1" MOUNTING

1. Mount the couplers to the ceiling using appropriate fasteners -NOT INCLUDED- according to the structure of the ceiling - see Fig.1
2. Pass the aircraft cables through the caps - see Fig.1
3. Fasten the caps to the couplers
4. Lift the fixture and attach the loose ends of the Aircraft Cables to the cable gliders -see Fig.1
5. Make all necessary wiring connections and attach the canopy to the junction box using the bracket/nipple/finial assembly provided.
6. Level the fixture using the cable gliders. To release the grip lock, press down on the tip of the mechanism. If desired, clip the excess aircraft cables after the fixture is level.

Note: The canopy is used to cover the branch circuit/junction box.

**IMPORTANT NOTE FOR
FIXTURES WITH LED:
- DO NOT TOUCH THE
LED.**

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: MICRO RING DE PENDANT


SIZE (in)	SUSPENSION POINTS	REMOTE BOXES
24	3	1
36	3	1
48	3	1
60	6	2
72	6	2
84	6	2



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "P1" MOUNTING

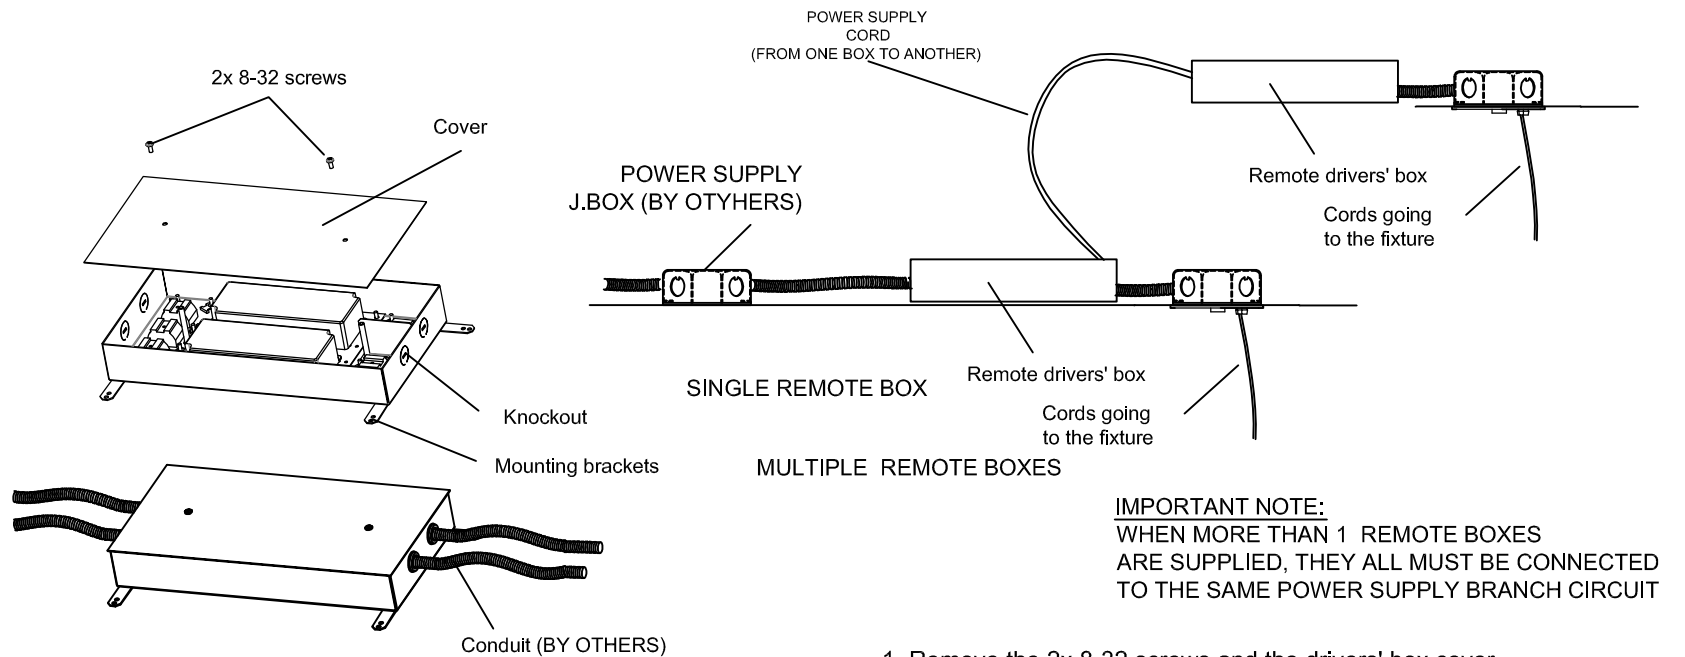

IMPORTANT NOTE:
WHEN MORE THAN 1 REMOTE BOXES
ARE SUPPLIED, THEY ALL MUST BE CONNECTED
TO THE SAME POWER SUPPLY BRANCH CIRCUIT

1. Remove the 2x 8-32 screws and the drivers' box cover.
 2. Remove the necessary Knockouts.
 3. Attach the conduits (not provided).
 4. Make the wiring connections.
 5. Install the cover using the previously removed screws.
- Use the mounting brackets to secure the box in place.

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**


FIXTURE DESCRIPTION: MICRO RING DE PENDANT



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "P1" MOUNTING

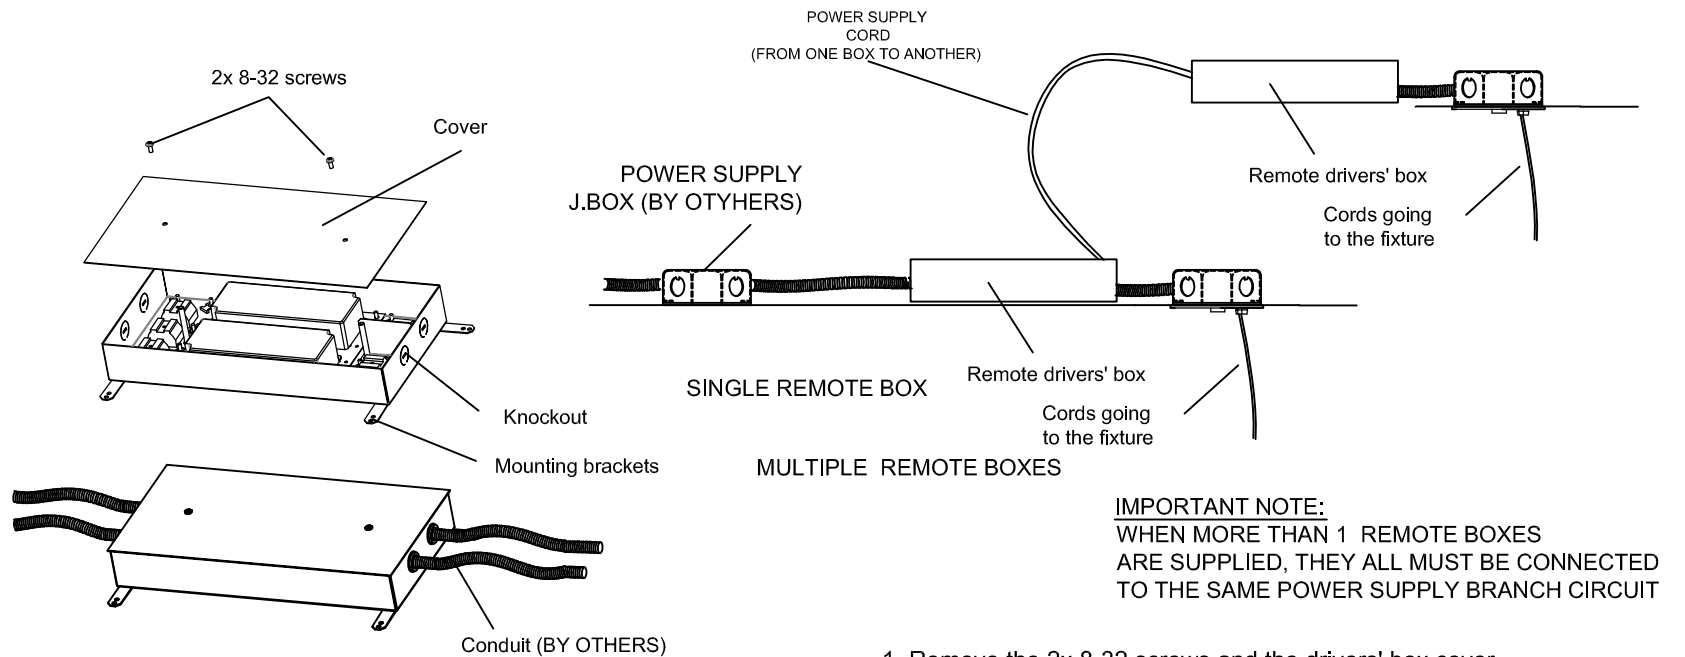

IMPORTANT NOTE:
WHEN MORE THAN 1 REMOTE BOXES
ARE SUPPLIED, THEY ALL MUST BE CONNECTED
TO THE SAME POWER SUPPLY BRANCH CIRCUIT

1. Remove the 2x 8-32 screws and the drivers' box cover.
 2. Remove the necessary Knockouts.
 3. Attach the conduits (not provided).
 4. Make the wiring connections.
 5. Install the cover using the previously removed screws.
- Use the mounting brackets to secure the box in place.

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**


FIXTURE DESCRIPTION: MICRO RING DE PENDANT



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "P2" MOUNTING

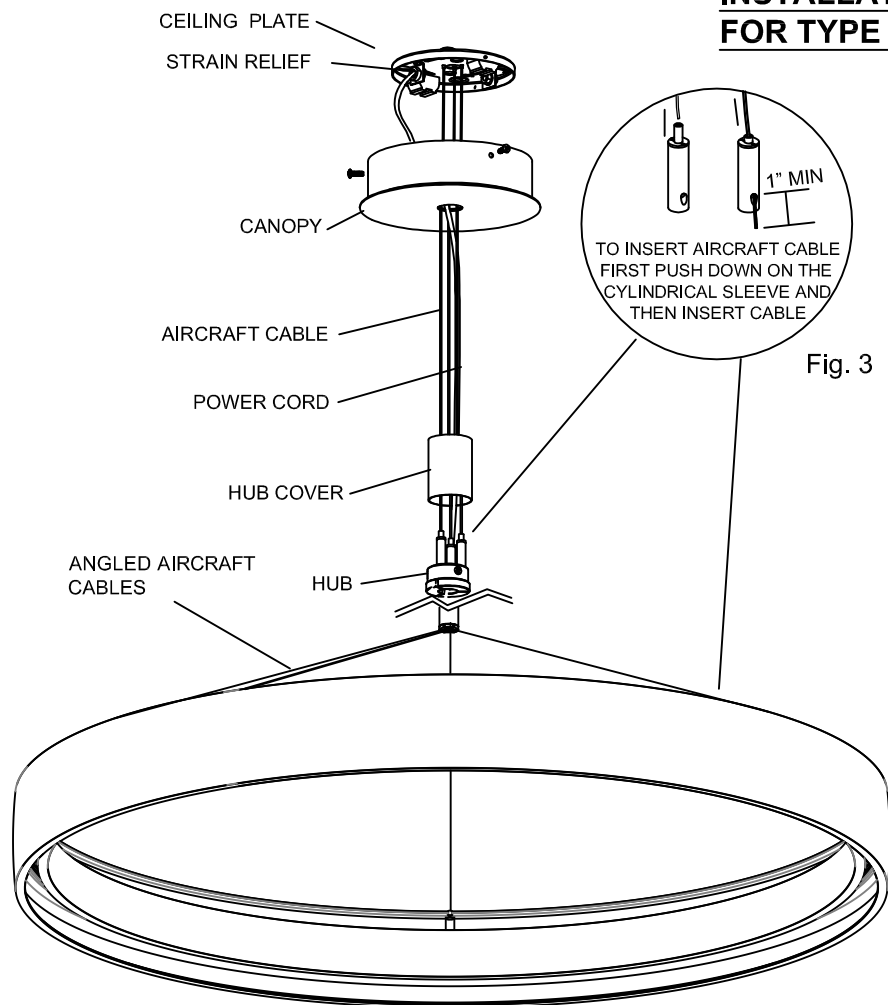

1. Place the fixture on a flat surface.
2. Attach the ceiling plate to the junction box and make the wiring connections coming from the remote box to the terminal blocks.
3. Lift the fixture and insert the long aircraft cables into the cable gliders on the hub (Fig. 3) as well as on the gliders on the ring. Ensure that the aircraft cables and power cords are passing through the canopy and hub cover.
4. Adjust height of the fixture, secure the power cord with the strain relief provided or use cables ties, and trim or coil inside the canopy the excess power cords.
5. Make all necessary electrical connections, lift canopy cover into position and secure with 3x screws.

SIZE (in)	SUSPENSION POINTS	REMOTE BOXES
24	3	1
36	3	1
48	3	1
60	6	2
72	6	2
84	6	2

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS



FIXTURE DESCRIPTION: MICRO RING, MICRO RING DE, MICRO RING SE, MICRO RING II



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "P2" MOUNTING

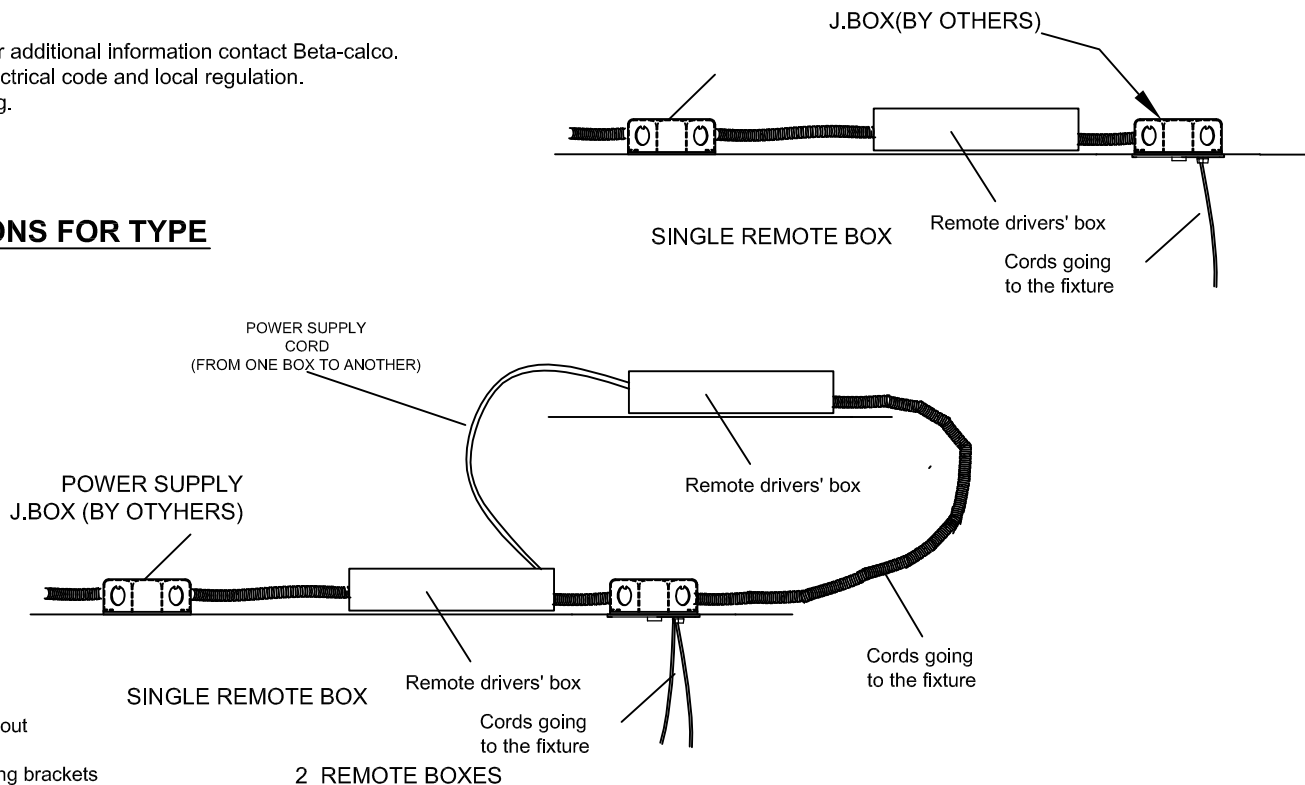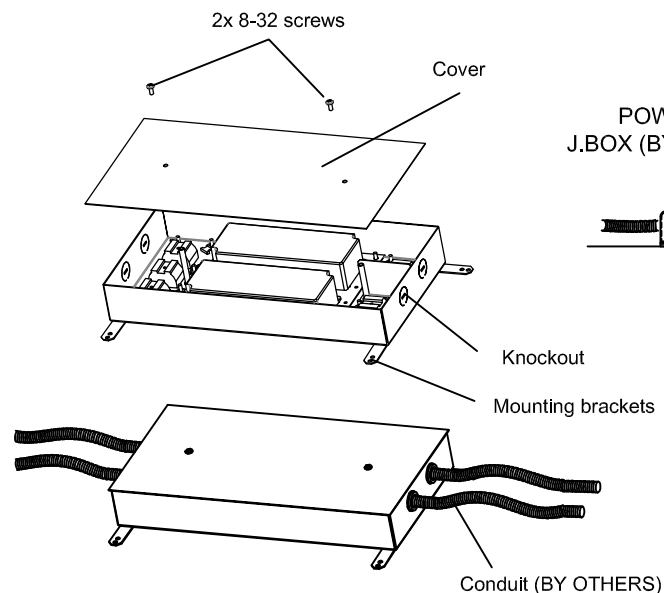

IMPORTANT NOTE:
WHEN MORE THAN 1 REMOTE BOXES
ARE SUPPLIED, THEY ALL MUST BE CONNECTED
TO THE SAME POWER SUPPLY BRANCH CIRCUIT

1. Remove the 2x 8-32 screws and the drivers' box cover.
 2. Remove the necessary Knockouts.
 3. Attach the conduits (not provided).
 4. Make the wiring connections.
 5. Install the cover using the previously removed screws.
- Use the mounting brackets to secure the box in place.

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**


FIXTURE DESCRIPTION: MICRO RING DE PENDANT



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR "P3" MOUNTING

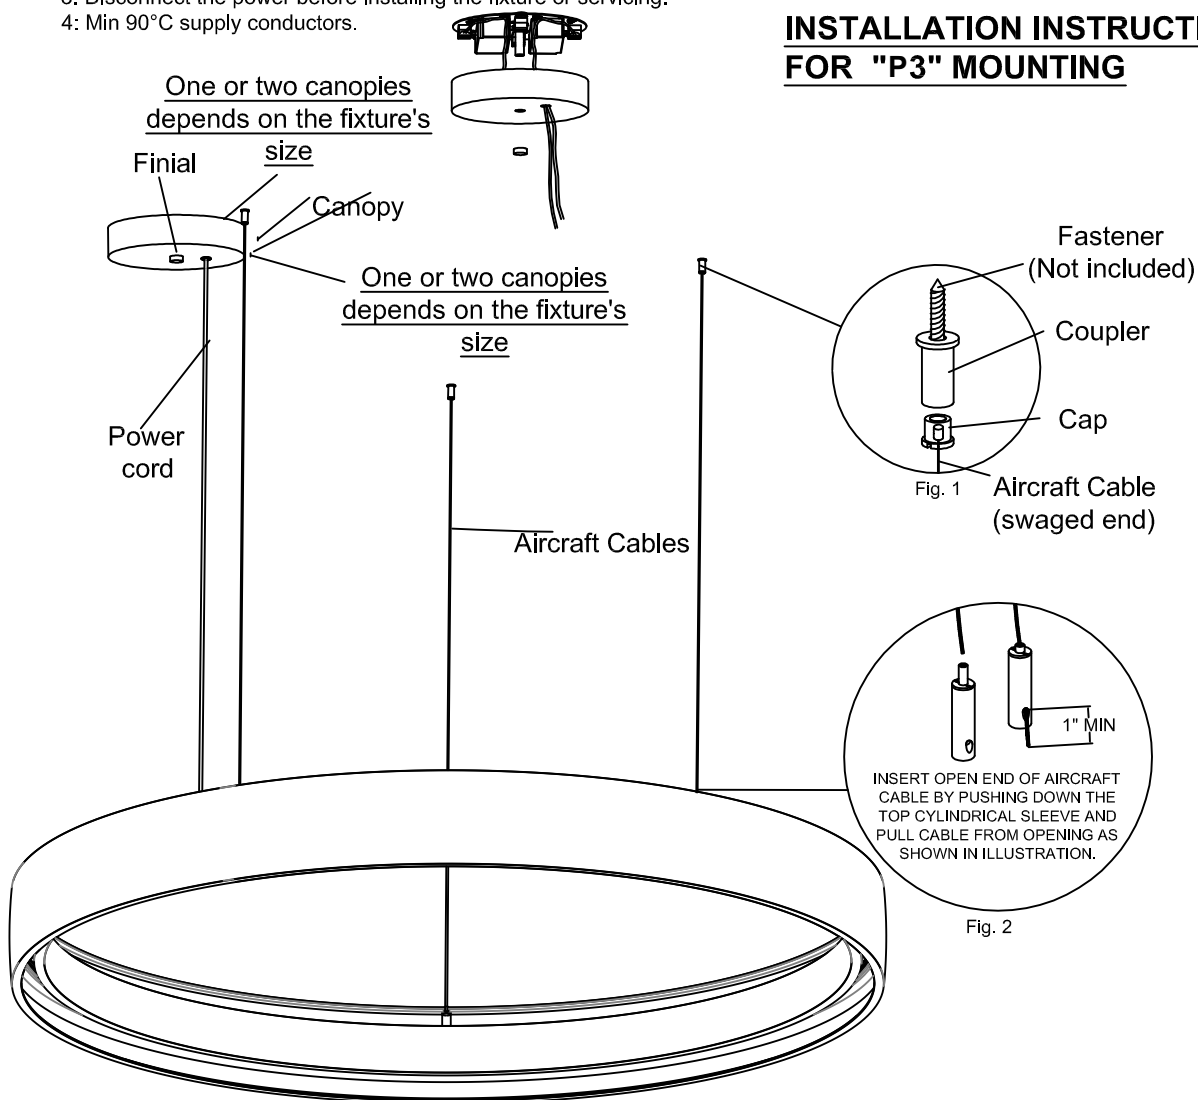

1. Mount the couplers to the ceiling using appropriate fasteners -NOT INCLUDED- according to the structure of the ceiling - see Fig.1
2. Pass the aircraft cables through the caps - see Fig.1
3. Fasten the caps to the couplers
4. Lift the fixture and attach the loose ends of the two Aircraft Cables to the cable gliders -see Fig.1
5. Make all necessary wiring connections and attach the canopy to the junction box using the bracket/nipple/finial assembly provided.
6. Level the fixture using the cable gliders. To release the grip lock, press down on the tip of the mechanism. If desired, clip the excess aircraft cables after the fixture is level.

Note: According to the options type, the fixture can have one or two power cords.

IMPORTANT NOTE:

**WHEN 2 CANOPIES ARE PROVIDED
PLEASE INSURE THAT THEY ARE
CONNECTED TO THE SAME POWER
SUPPLY BRANCH CIRCUIT.**

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: MICRO RING, MICRO RING DE, MICRO RING SE, MICRO RING II


betacalco™



WEB PIN™ CODE: 222

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "P4" MOUNTING

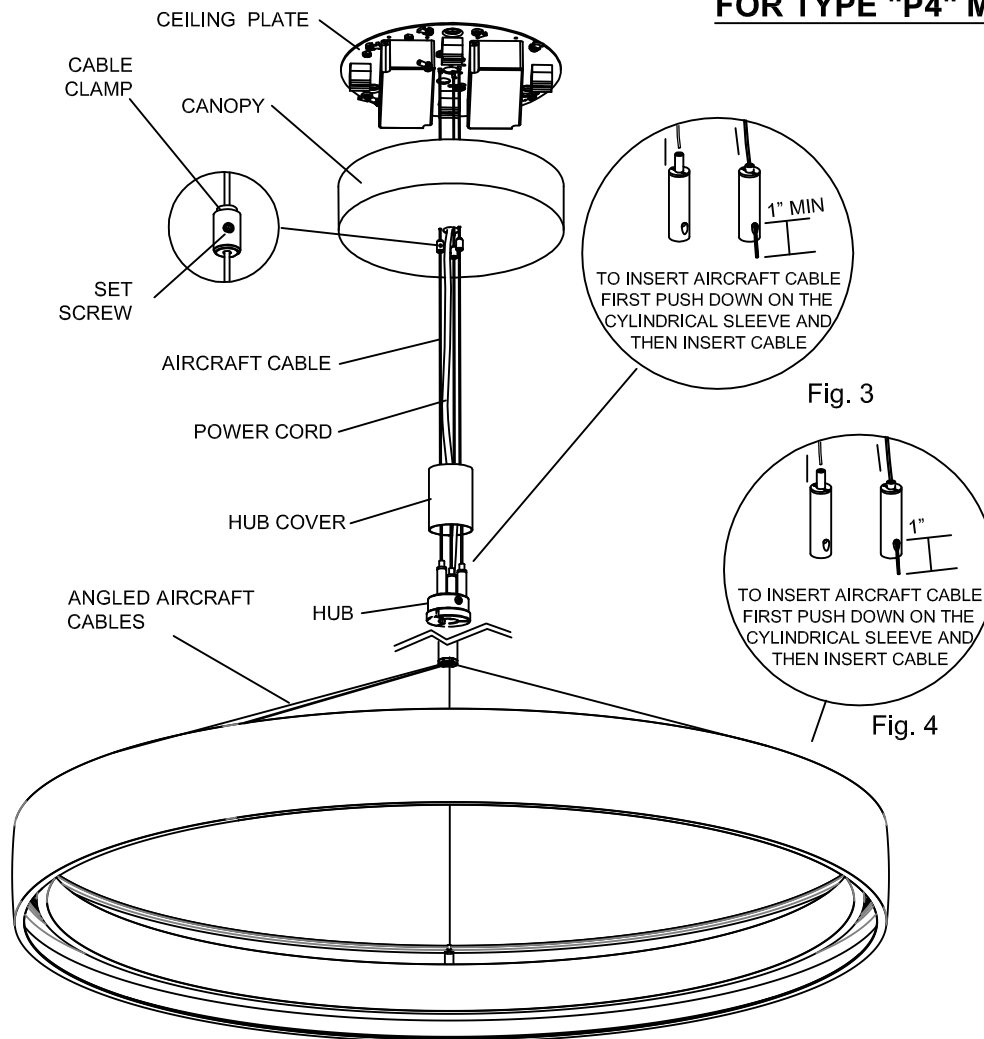

1. Place the fixture on a flat surface.
2. Lift the ceiling plate with aircraft cables, make the wiring connections inside the junction box, and attach the ceiling plate to the junction box.
3. Lift the fixture and insert the long aircraft cables into the cable gliders on the hub (Fig. 3) as well as on the gliders on the ring. Ensure that the aircraft cables and power cords are passing through the canopy and hub cover.

Important:

The angled aircraft cables attached to the ring (Fig. 4) must protrude 1 inch only beyond the glider.

4. Adjust height of the fixture, secure the power cord with the with cables ties, and trim or coil inside the canopy the excess power cords.
5. Make all necessary electrical connections, lift canopy cover into position and secure with 3x cable clamps and set screws.

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

Fixture Description: CERCHIO II

Cerchio II - S4 with Slope Canopy

INSTALLATION - PENDANT MOUNT

PAGE 1 of 1



WEB PIN™

CODE: 222



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR







FIGURE 1

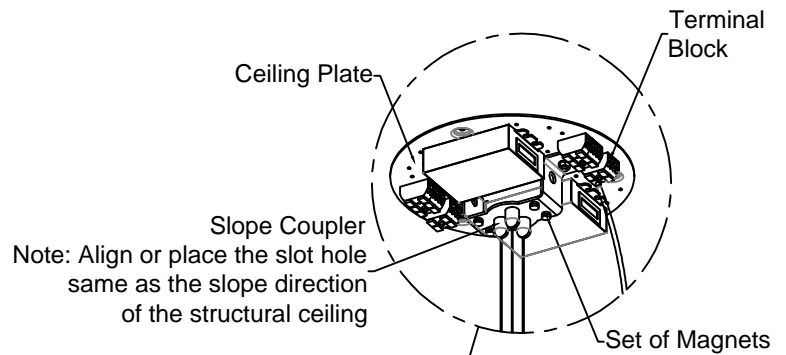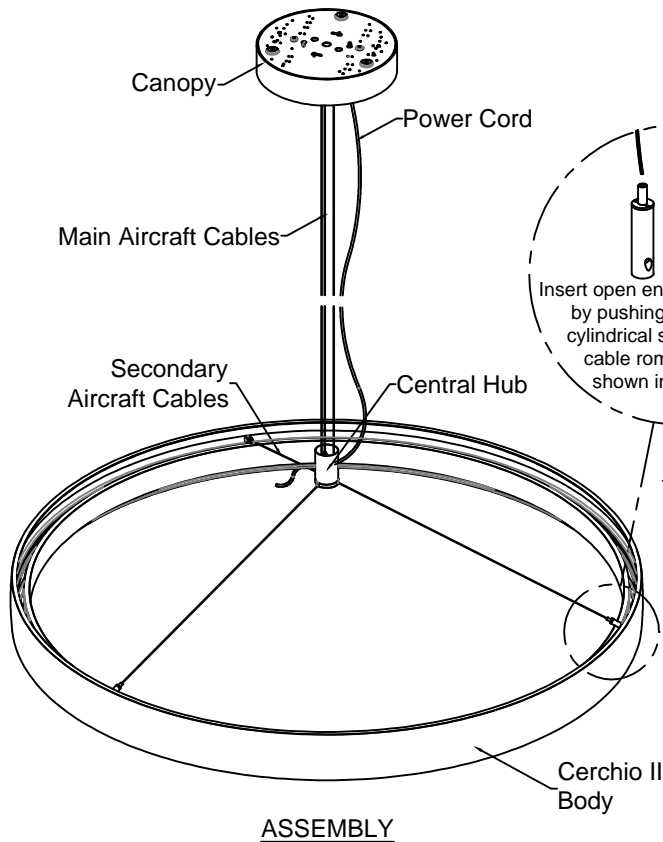

NOTES:

1. Remove the canopy from ceiling plate assembly (attached with a set of magnets)
2. Make all necessary wiring connections to power supply and secure the ceiling plate to the ceiling (fasteners by others)
3. Slide back the canopy to main aircraft cables
4. Insert the loose end of main aircraft cables to the cable gliders inside the central hub (see FIGURE 1 for proper attachment)
5. Lift the fixture and insert the secondary aircraft cables to corresponding cable gliders of the fixture
6. Pass the power cord through the grommet of canopy and make a wiring connection to terminal block in the ceiling plate
7. Re-attach the canopy
8. Level the fixture using the cable gliders, to release the grip lock, press down on the tip of the mechanism, if desired, clip the excess aircraft cables after the fixture is level

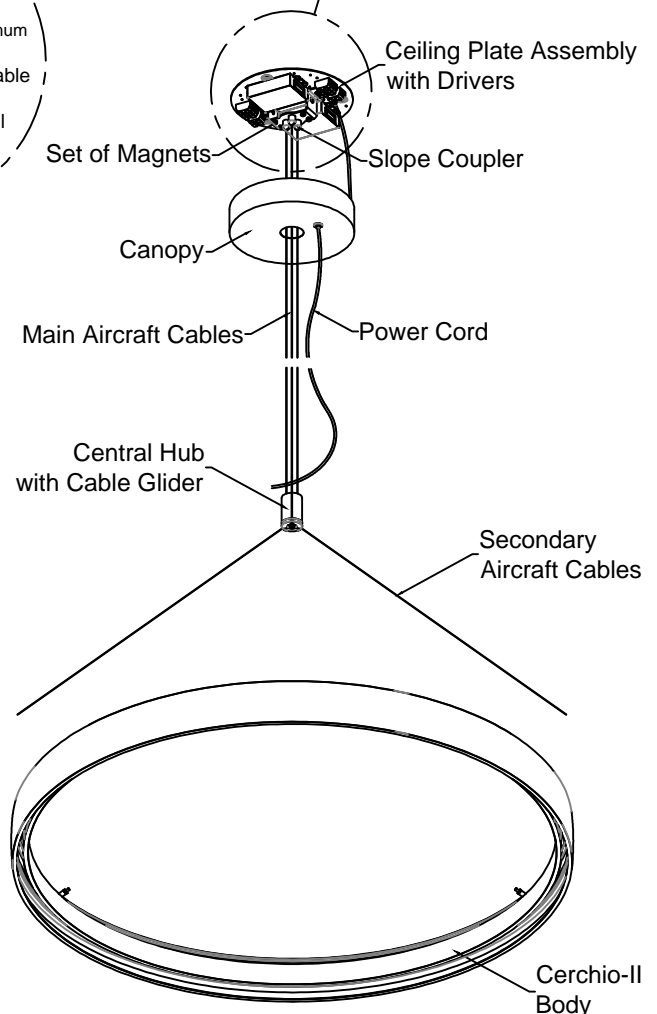