

1: These instructions may not cover all details or variations. For additional information, please contact Customer Service at Beta-Calco.

2: Luminaires must be installed in accordance with national electrical code and local regulation.

3: Disconnect the power before installing the fixture or servicing.

4: Min 90 C supply conductors.

## FIXTURE COMES PARTIALLY ASSEMBLED.



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION.



ALWAYS SUPPORT FIXTURE BY MORE THEN ONE POINT. NEVER LEFT FIXTURE BY ONLY ONE CABLE/POINT.



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

## INSTALLATION STEPS:

1. Mount the couplers to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling (Fig. 1 and Table 1).

PLEASE ENSURE THAT THE FASTENERS ARE INSTALLED ON THE STUD/JOIST OR ANY SUPPORTING STRUCTURE OF THE CEILING. THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY FROM AN OUTLET BOX.

2. Pass the aircraft cables through the caps (Fig. 2)
3. Fasten the caps to the couplers.
4. Lift the fixture and attach the loose ends of the three aircraft cables to the cable gliders (Fig. 3)
5. Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple / finial to proper secure the assembly. (Fig. 4).
6. Level the fixture using the cable gliders.
7. Insert diffusers (textured side down) and the louvers by slightly twisting and lifting into place until it snaps into the groove with secure "click".

Nominal Diameter (ft)	Diameter (A)		Dimension (D)	
	in	mm	in	mm
2	22.530	572	19.512	496
3	33.990	863	29.436	748
4	45.910	1166	39.759	1010
5	57.910	1471	50.152	1274
6	69.910	1776	60.544	1538
7	81.910	2081	70.936	1802

Table 1

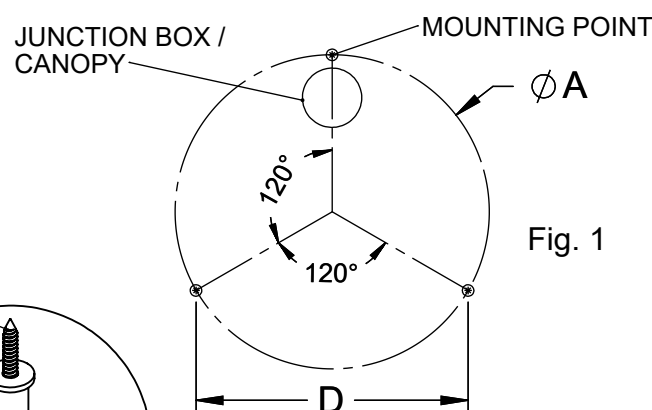


Fig. 1

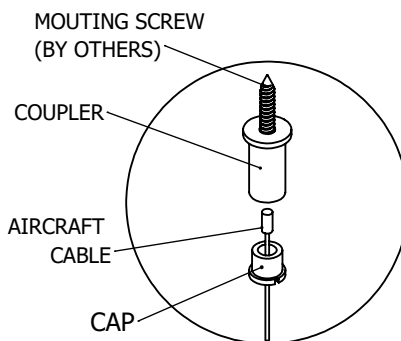


Fig. 2

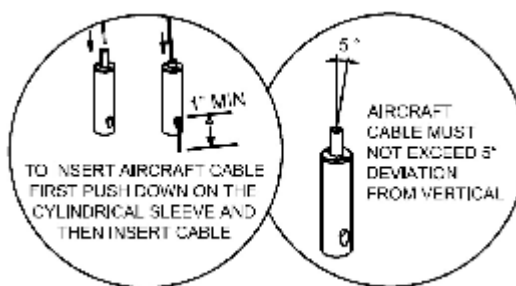
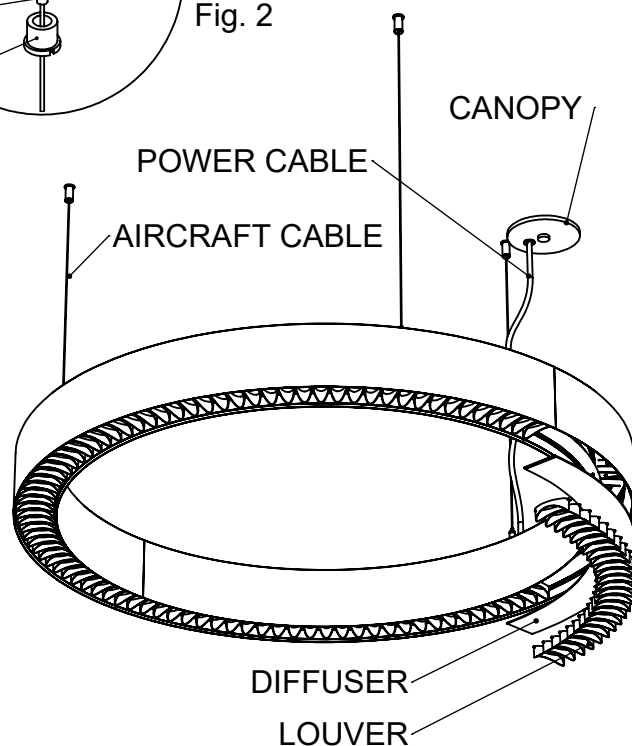


Fig. 3

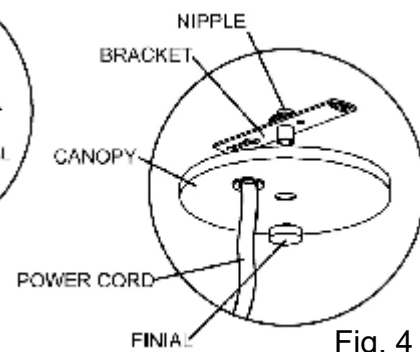


Fig. 4