


BOOK

INTRODUCTION

A key aspect of human-centric design is minimizing noise pollution, as it significantly affects both comfort and productivity in shared environments. To achieve this, sound-absorbing materials and luminaires are thoughtfully integrated to improve a room's acoustic quality while enhancing its visual appeal. Acoustic lighting stands out as an innovative solution, blending functional illumination with advanced sound-absorbing properties. Crafted from soft, porous materials, these fixtures effectively reduce ambient noise, fostering a quieter, more comfortable atmosphere. By minimizing disruptive sound reflections and echoes, acoustic lighting promotes better focus, clearer communication, and a heightened sense of well-being, making it an essential element in modern spaces.




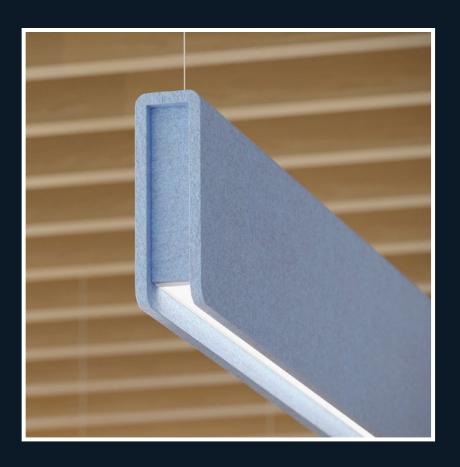


BOOK RG




BOOK CURVED RG

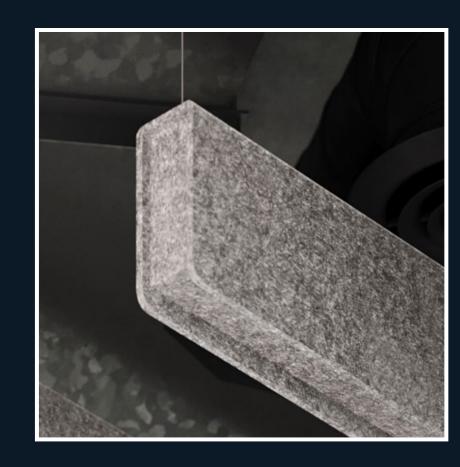

NON-ILLUMINATED RG

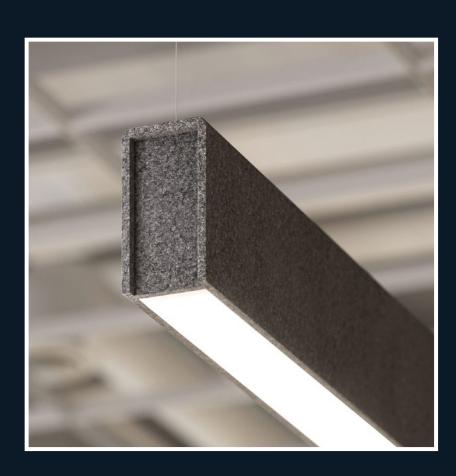

BOOK FL

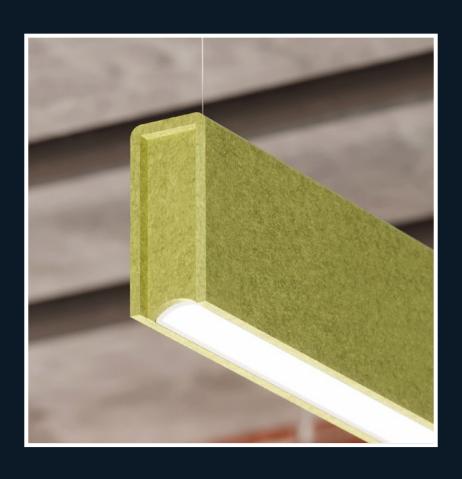

BOOK CURVED FL



NON-ILLUMINATED FL

FEATURES

ACOUSTIC

The BOOK Acoustic Series combines advanced lighting with acoustic functionality in a single, elegant design. Each fixture features high-performance acoustic felt with an NRC rating of 0.8, ensuring excellent noise control alongside quality lighting. Crafted from 100% recyclable PET material, the acoustic felt provides effective sound absorption, is lightweight, and fire-resistant, making it a valuable addition to enhancing the ambiance in commercial spaces.

FLEXIBLE APERTURE OPTIONS

Select from three aperture sizes (1.5", 2.5", and 3.5") to customize your lighting design. Whether you're aiming for a soft, subtle illumination or a striking visual impact, these sizes offer the adaptability to seamlessly integrate with the architectural environment, fulfilling both the aesthetic and functional needs of any project.

SEAMLESS ROLLOUT LENS

Experience uniform, shadow-free lighting with our easy-to-install rollout lens. Designed for both visual perfection and hassle-free maintenance, its field-cuttable construction allows for on-site adjustments, offering a versatile and convenient solution for even the most complex installations.

LIGHT DISTRIBUTION

The Diffused optic delivers soft, uniform lighting, striking a balance between aesthetics and functionality for general applications. The 120° Batwing optic, designed for indirect lighting, enhances ambient light by reflecting glare-free light off the ceiling.

VERSATILE LUMEN PACKAGES


Choose from eight lumen packages, ranging from 200 LM/FT to 1400 LM/FT, to achieve the ideal light intensity for any environment. This range of options ensures precise lighting design, delivering the perfect brightness for every setting, from warm, ambient spaces to well-lit areas that demand high visibility.

HIGH-EFFICIENCY LIGHTING

Achieve outstanding lighting performance with a lumen efficacy of 129 LPW, providing bright, energy-efficient illumination. This high efficiency not only reduces energy consumption but also offers an eco-friendly and cost-effective solution, ideal for large-scale projects.

CIRCADIAN SYNCING

Enhance your environment with BIOS technology, which adjusts the light spectrum throughout the day to mimic natural daylight cycles. This promotes healthy circadian rhythms, supporting improved cognitive function, better sleep, and overall well-being for occupants, creating a more holistic and nurturing space.

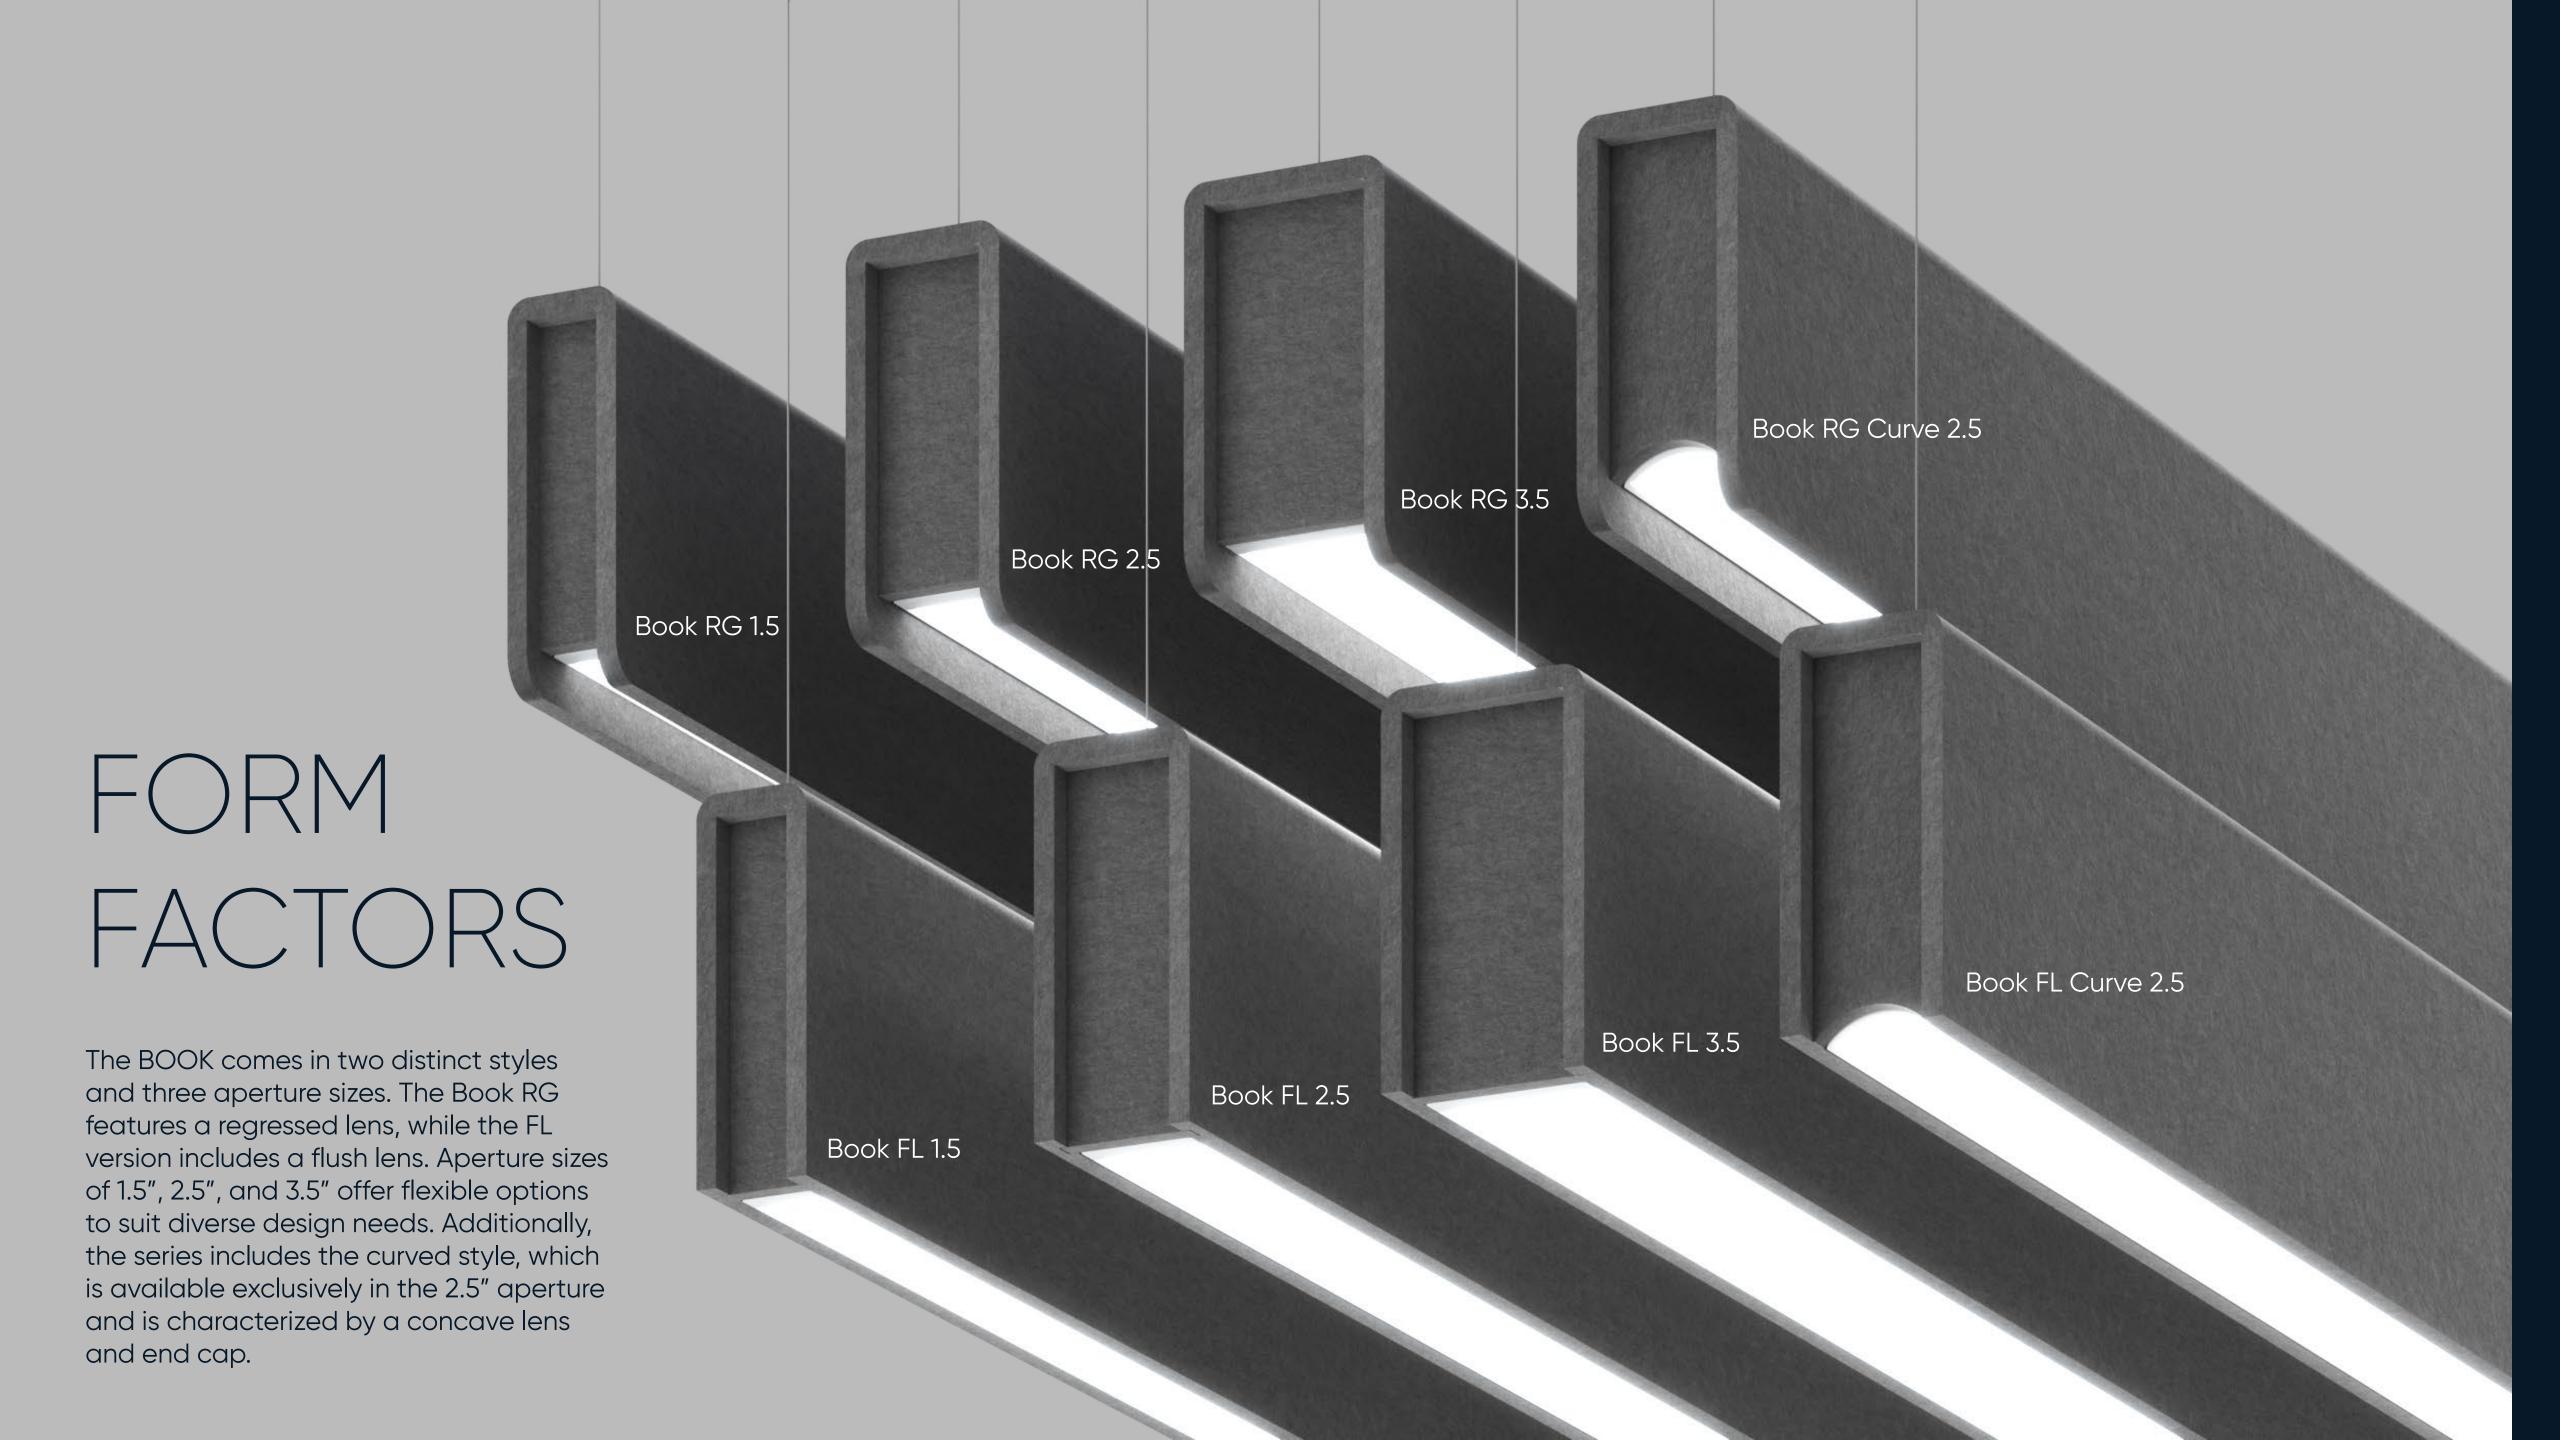

ACOUSTIC PANEL COLORS

Custom options available to special order.



AP02






AP13 Apple Green



AP47 Navy Peony



AP04 White



AP22 Blue



AP60 Pure Red



AP08 Red Coffee



AP26



Sesame Gray



AP73 Cloudburst



AP89 Douglas Fir

AP11


Light Gray

AP27

Black



APW01 Oak

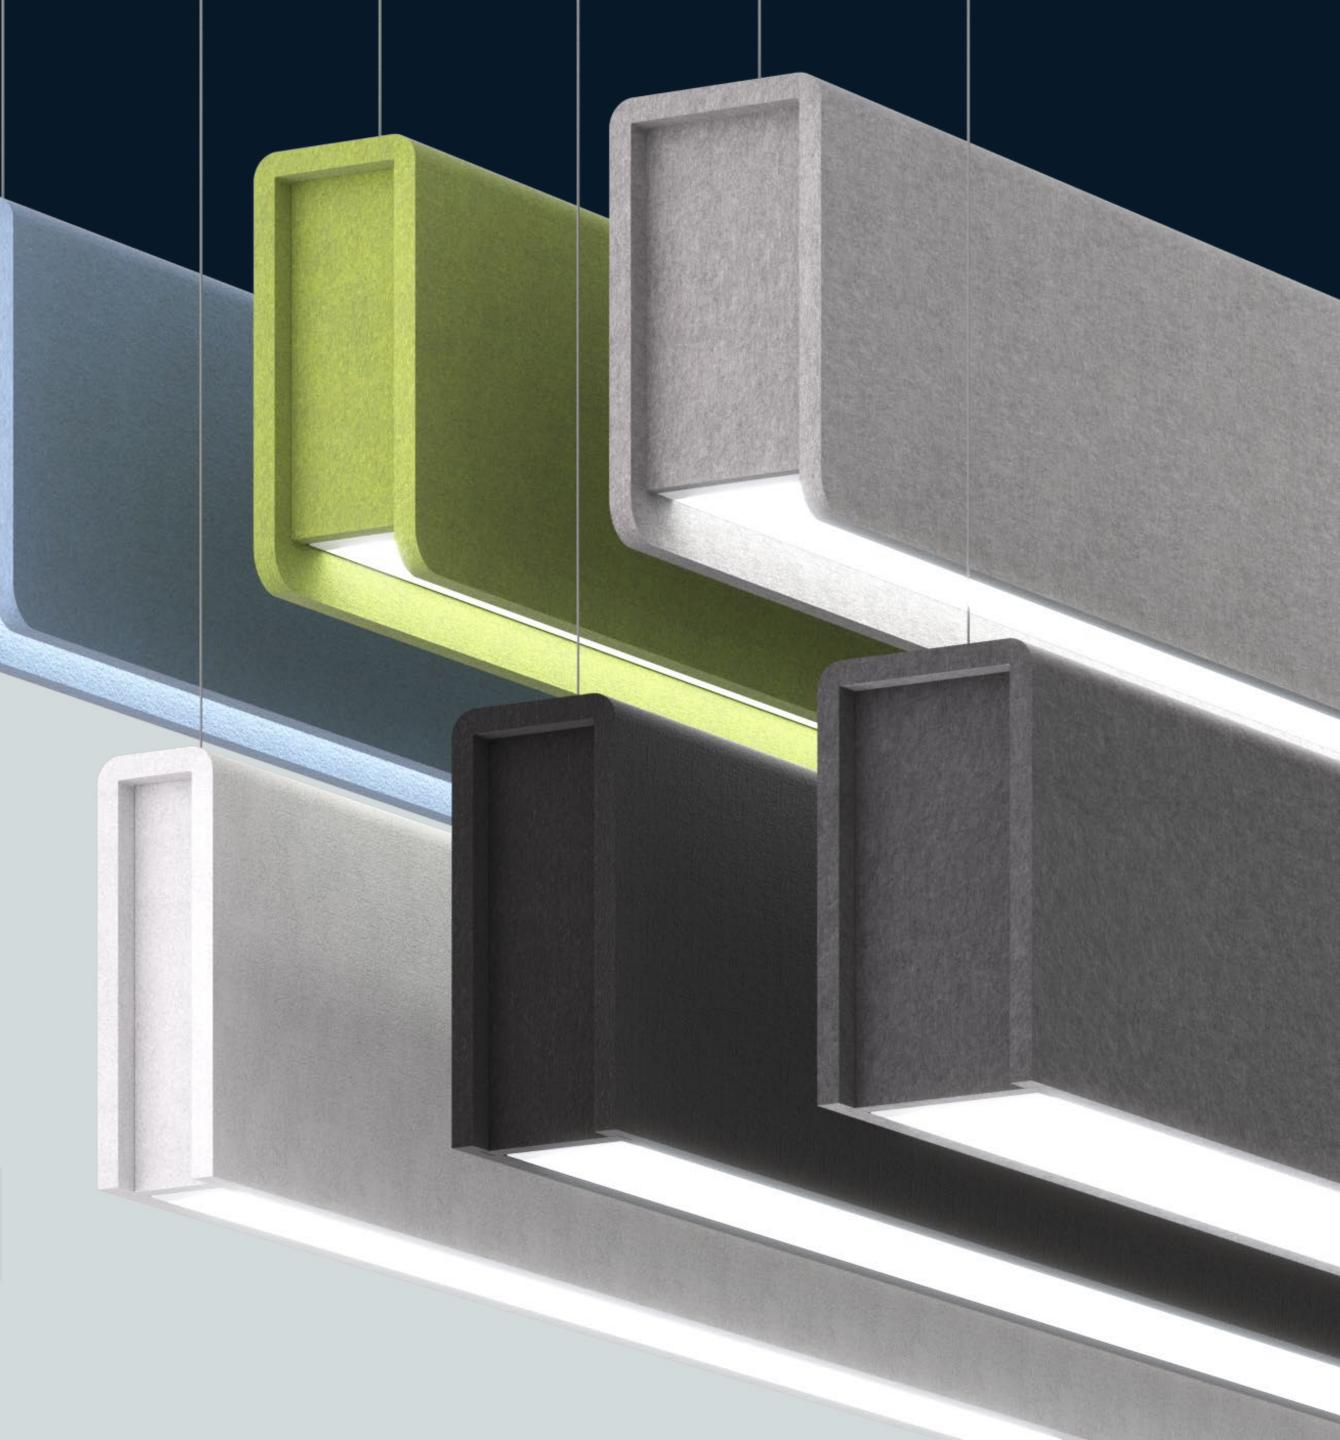




ACOUSTIC PANELS

Acoustic panels are effective for dampening sound in high-traffic areas and spaces with acoustically reflective surfaces.




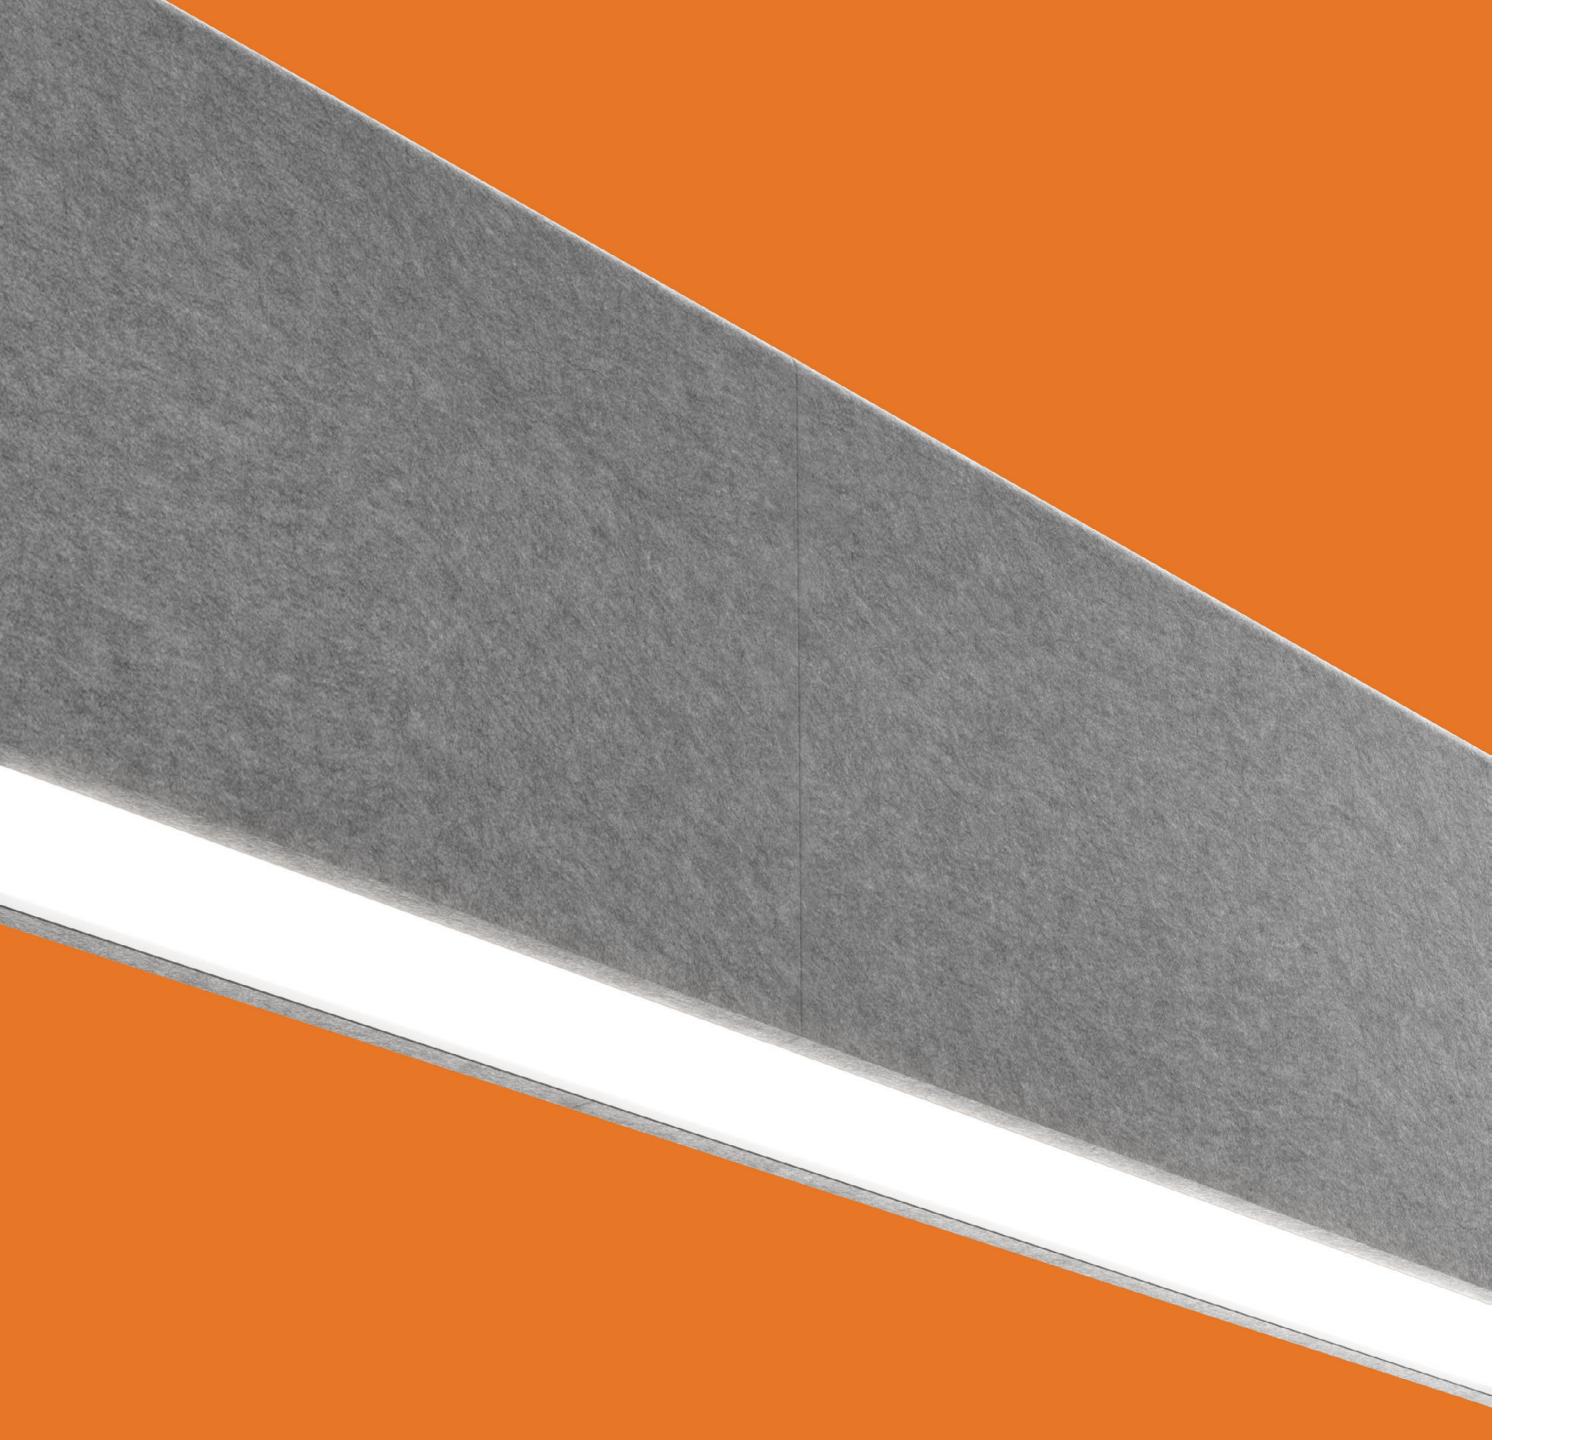

Continuous Perfection

Available in continuous runs up to 50' and 6 standard lengths: 2', 4', 6', 8', 10', 12'.


The longer lengths, 8', 10' and 12', will consist of 2 connected acoustic panels with a full linear extrusion underneath.

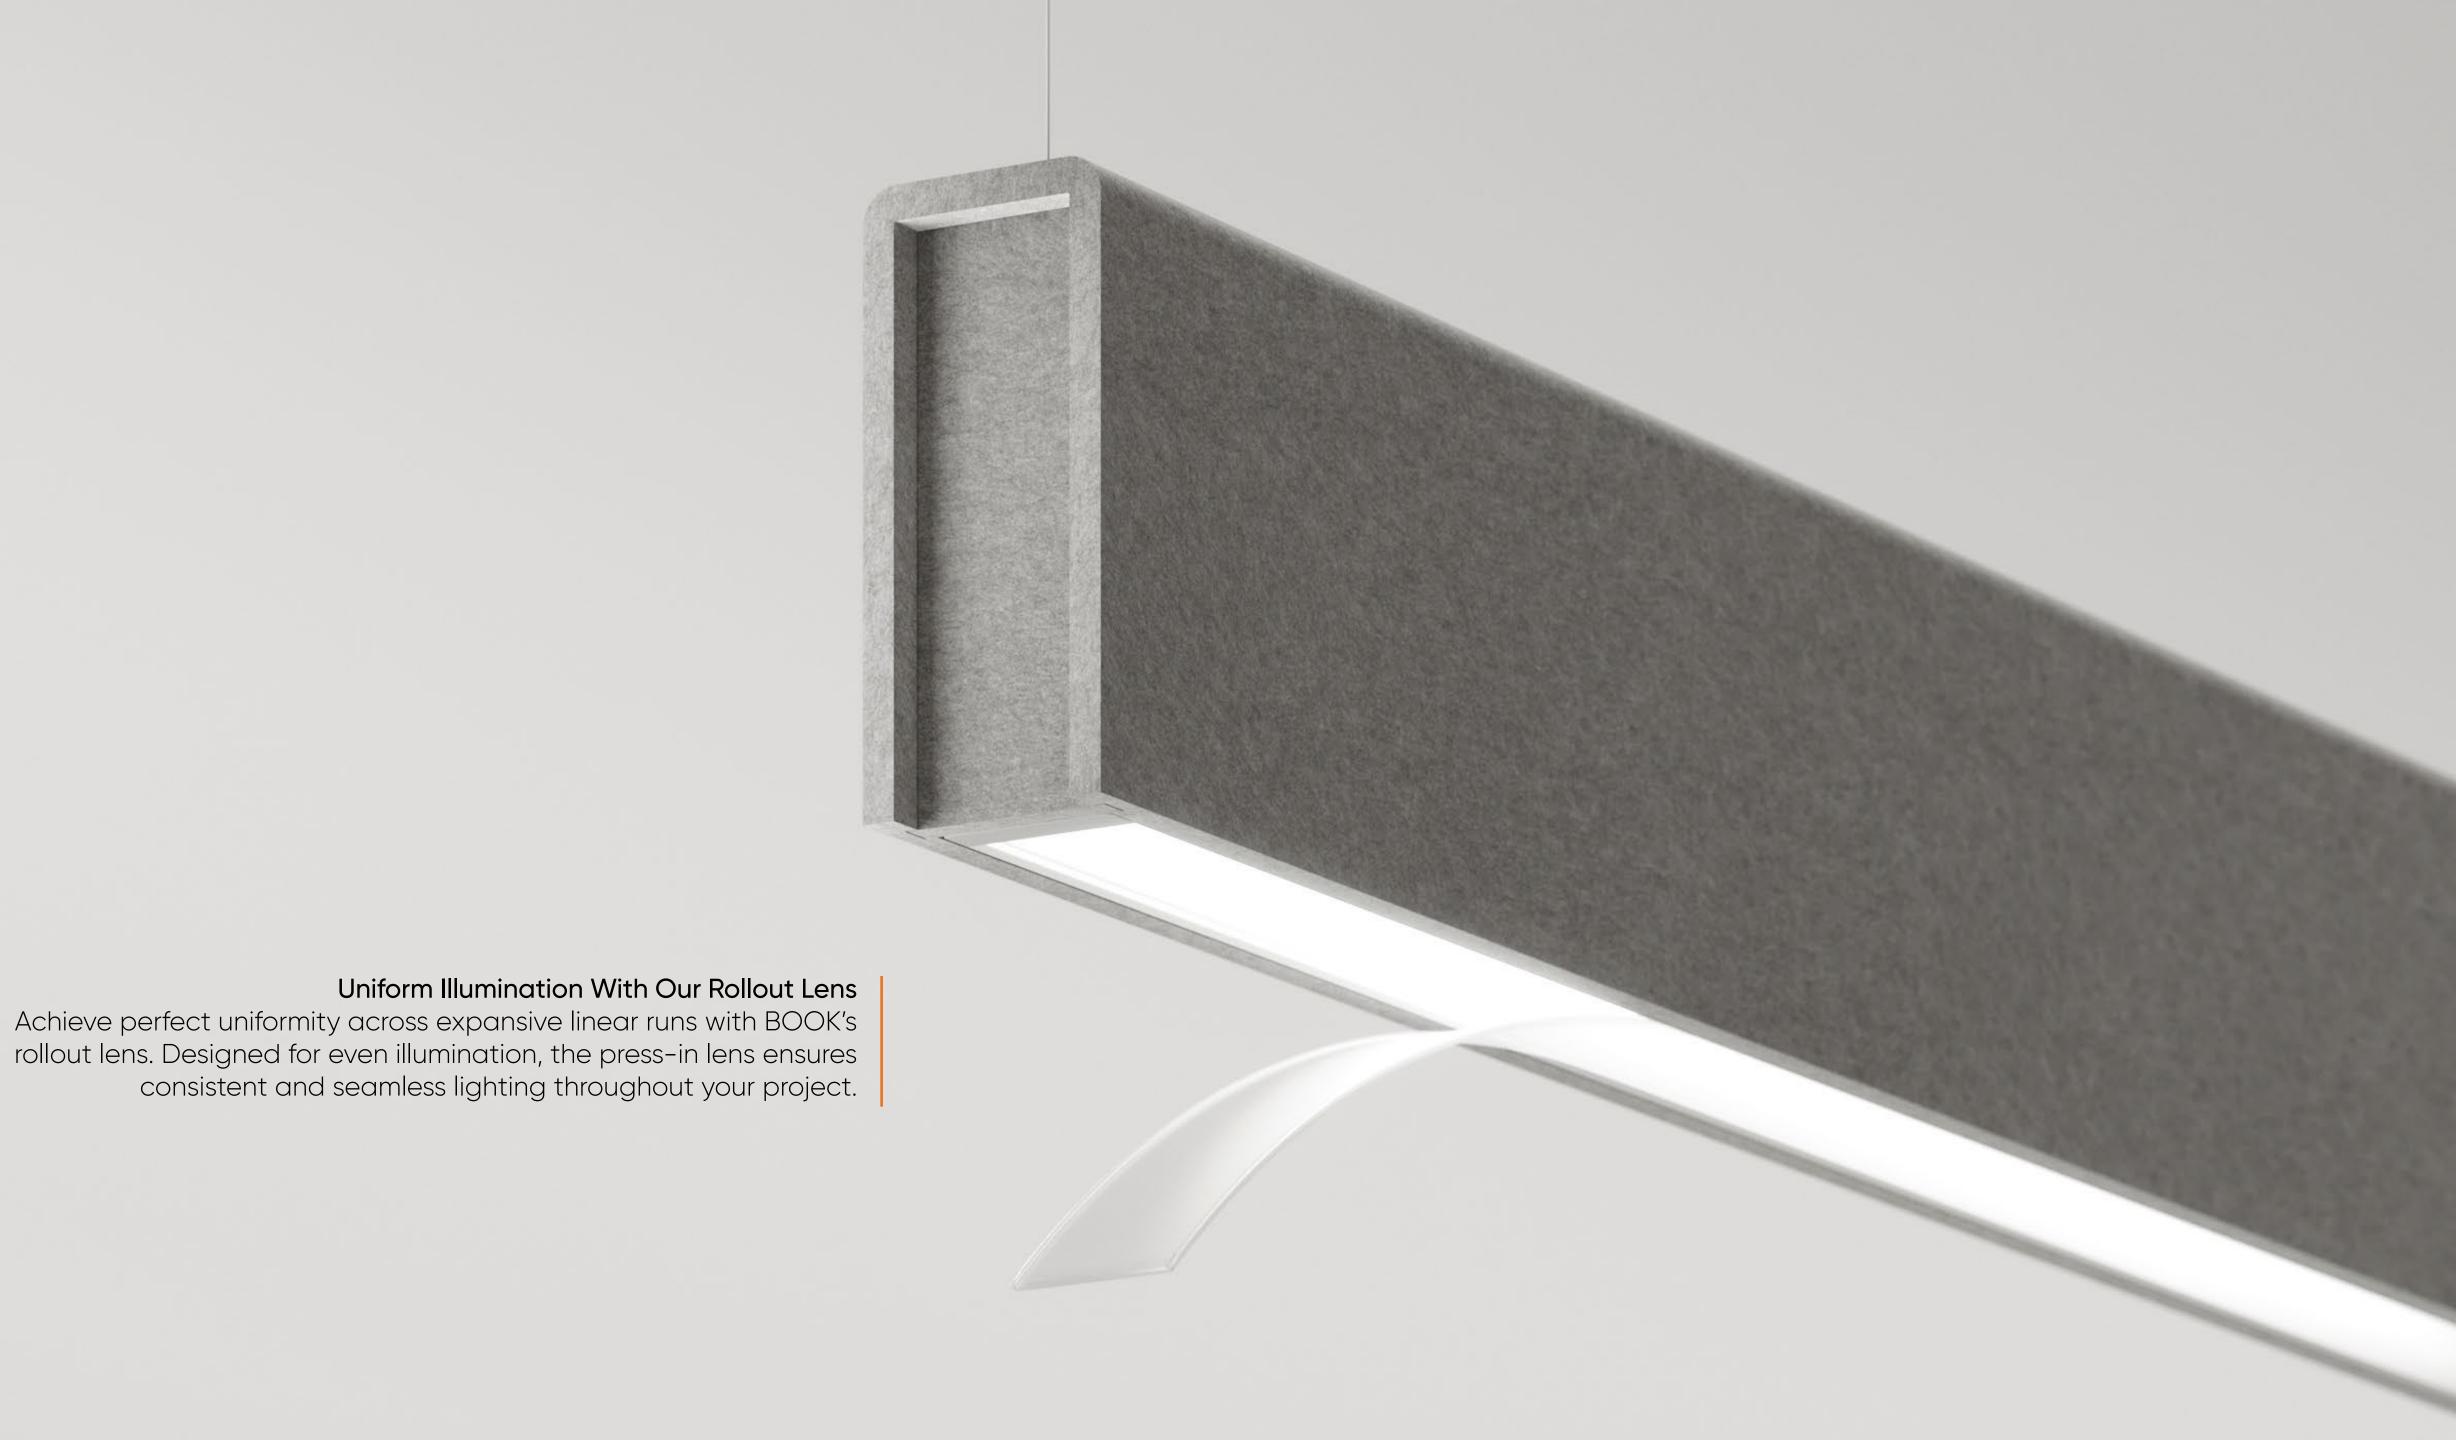





BOOKRG OPTICS Diffused: A performance-focused lens engineered to provide soft, uniform light while fostering a welcoming, low-glare environment. This design is ideal for spaces requiring consistent, soothing illumination, offering visual comfort and elevating the overall lighting experience. Diffused: The opal lens for indirect lighting ensures smooth and even light distribution, reducing ceiling glare and enhancing ambient brightness. Perfect for creating a welcoming atmosphere with gentle, reflected light. Batwing: Delivers a 120° beam, distributing light upward toward the Indirect ceiling and reflecting it back into the space. This creates balanced, glare-free ambient lighting, ideal for classrooms, offices, and workspaces. Asymmetric: The asymmetric optic for indirect lighting directs light at an angle, enhancing wall surfaces and creating a sense of spaciousness. It provides dynamic lighting effects with balanced light spread. Ideal for indirect wall washing and enhancing architectural elements.

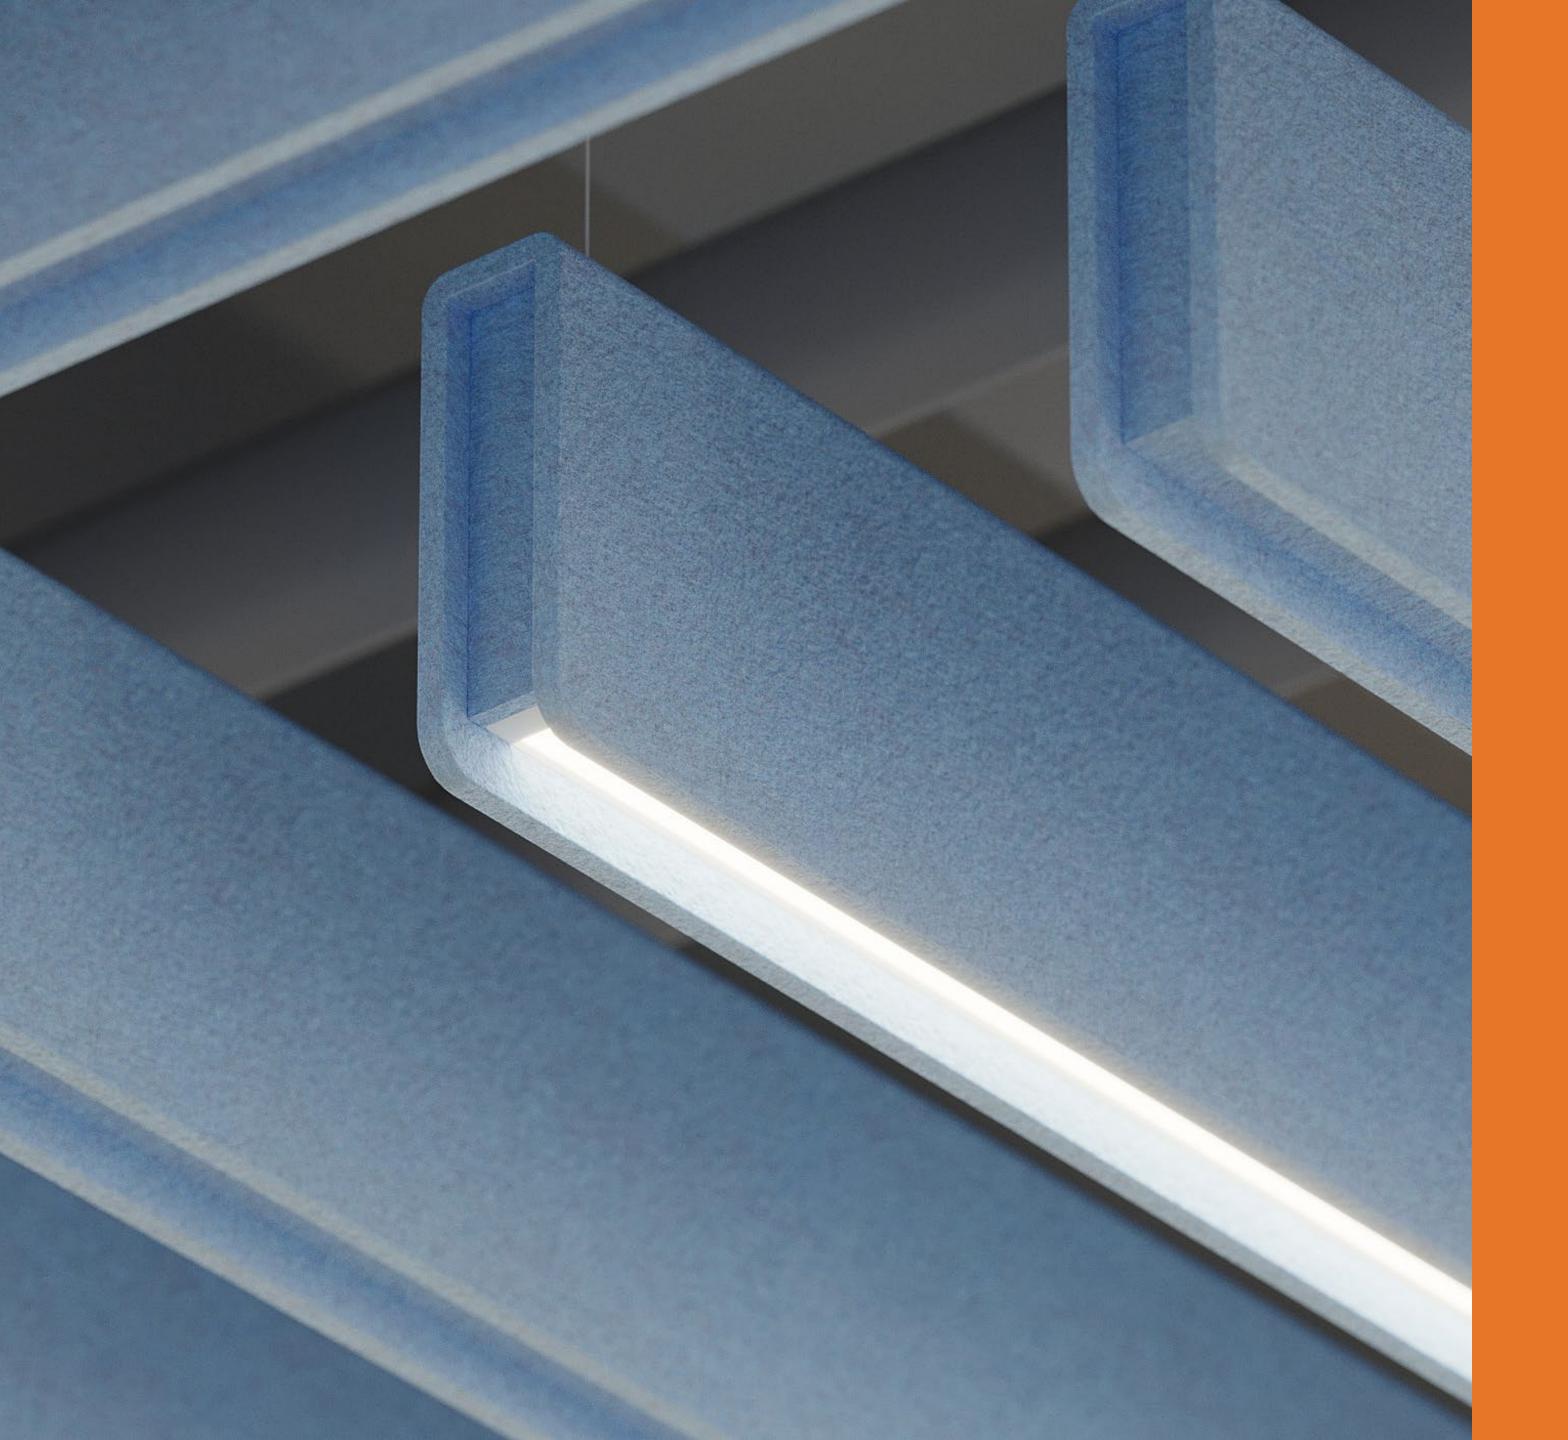

Seamless Style, Superior Sound Control

Reduce sound reverberation with non-illuminated panels that harmonize with the form factor of the Book luminaire. Designed to complement the aesthetic of the lighting fixture, these elements enhance acoustic comfort while maintaining a cohesive design. By incorporating these matching panels, spaces achieve effective noise control without compromising visual appeal, creating a quieter, more pleasant environment suited to open offices, collaborative areas, and workspaces that value both functionality and style.

USE CASE SCENARIOS

OPEN PLAN OFFICE SPACE

Diffused optic in 3.5" option with 200lms/ft direct and 400lms/ft indirect

Room size:	50' × 50'	Workplane 30" above finished floor (fc level):	42
Ceiling height:	12'	Workplane uniformity max to min:	1.2:1
Luminaire mounting height:	10'	Ceiling uniformity max to min:	3.5:1
Reflectances:	80/50/20	UGR average:	<12
Light loss factor:	1.0	Watt sq/ft:	0.4

CONFERENCE ROOM

Diffused optic in 1.5" option with 400lms/ft direct and 600lms/ft indirect

80/50/20

1.0

1.0

Room size:	20'x12'	Workplane 30" above finished floor (fc level):	44
Ceiling height:	10'	Watt sq/ft:	0.45
Luminaira mauntina haiaht	Q'A"		



LIBRARY


Reflectances:

Light loss factor:

Light loss factor:

Diffused optic in 2.5" option over reading area with 200lms/ft direct and 600lms/ft indirect Diffused optic in 2.5" option in bookshelf area with 400lms/ft direct and 200lms/ft indirect


Room size:	40' × 40'	Reading area workplane 30" above finish:	44
Ceiling height:	12'	Workplane uniformity max to min:	1.2:1
Bookshelf height:	5'	Illuminance on book stacks:	25
Luminaire mounting height:	9'	Ceiling uniformity max to min:	4:1
Reading area-for Stacks:	8'	Watt sq/ft:	0.54
Reflectances:	80/50/20		

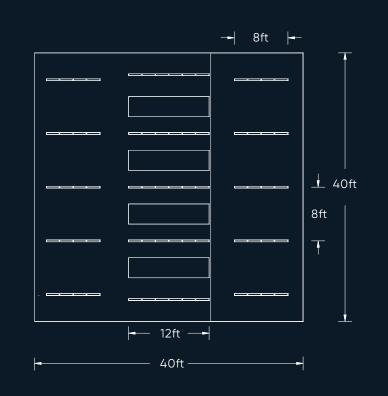


DIMENSIONS

BOOK RG can be configured as a continuous run up to 50ft on a single circuit. Start with a minimum length of 2ft and add increments of 2ft.

Section Lengths

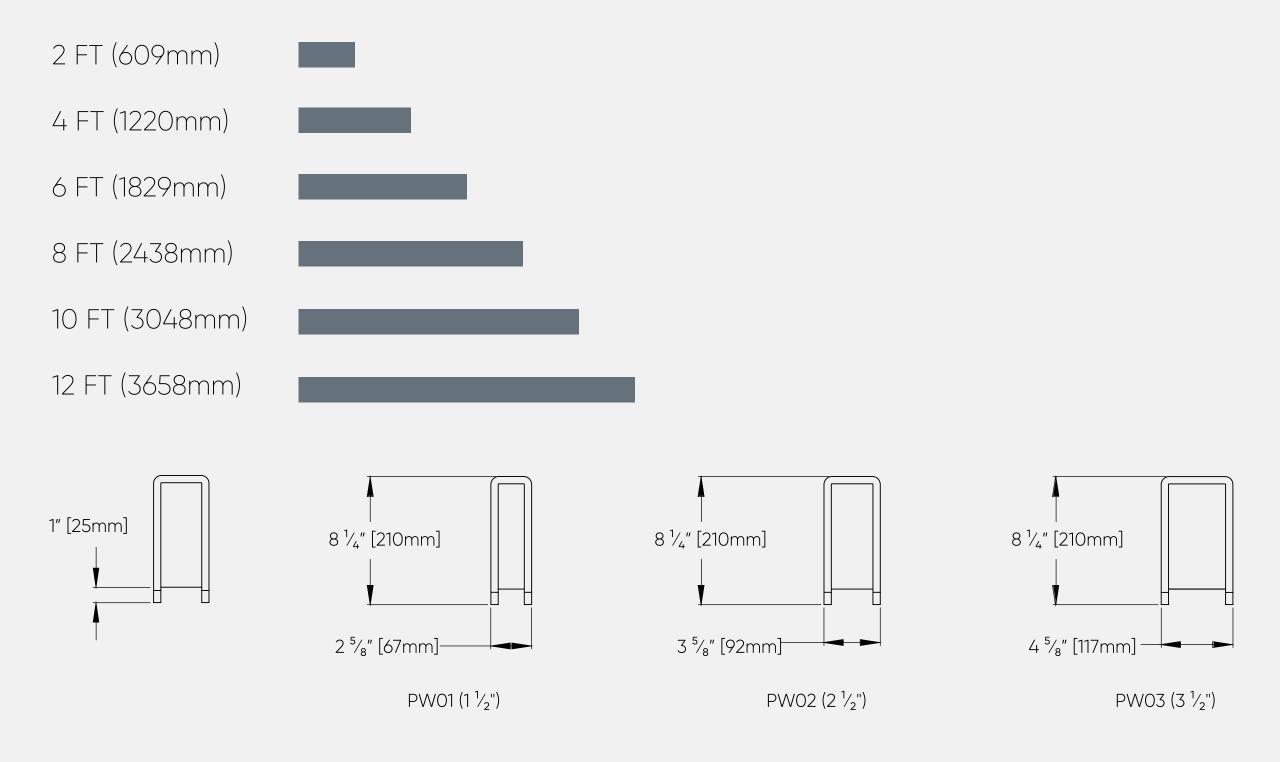

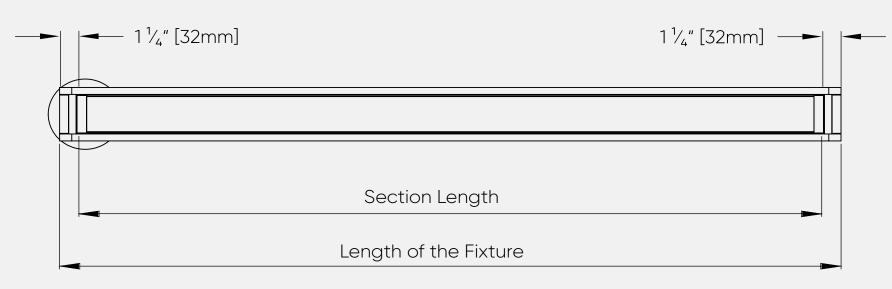

Length of the Fixture
26 ½" [673mm]
50 ½" [1282mm]
74 ½" [1892mm]
98 ½" [2501mm]
122 ½" [3111mm]
146 ½" [3721mm]






BOOKFL OPTICS




Indirect



Diffused:

A performance-focused lens engineered to provide soft, uniform light while fostering a welcoming, low-glare environment. This design is ideal for spaces requiring consistent, soothing illumination, offering visual comfort and elevating the overall lighting experience.

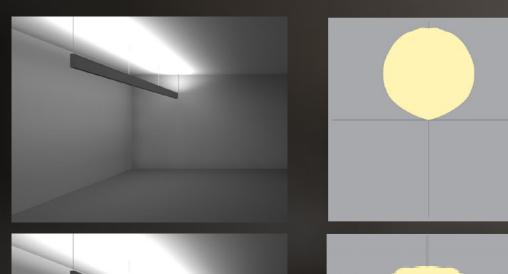


Diffused:

The opal lens for indirect lighting ensures smooth and even light distribution, reducing ceiling glare and enhancing ambient brightness. Perfect for creating a welcoming atmosphere with gentle, reflected light.



Batwing:

Delivers a 120° beam, distributing light upward toward the ceiling and reflecting it back into the space. This creates balanced, glare-free ambient lighting, ideal for classrooms, offices, and workspaces.

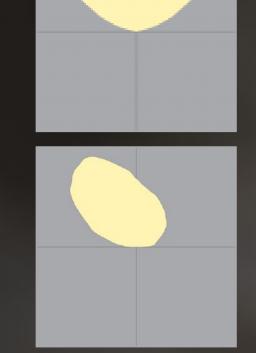

Asymmetric:

The asymmetric optic for indirect lighting directs light at an angle, enhancing wall surfaces and creating a sense of spaciousness. It provides dynamic lighting effects with balanced light spread. Ideal for indirect wall washing and enhancing architectural elements.









BOOKFL


DIMENSIONS

BOOK FL can be configured as a continuous run up to 50ft on a single circuit. Start with a minimum length of 2ft and add increments of 2ft.

Section Lengths

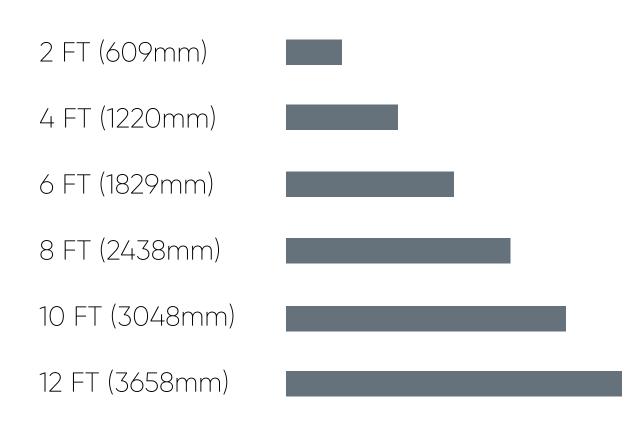


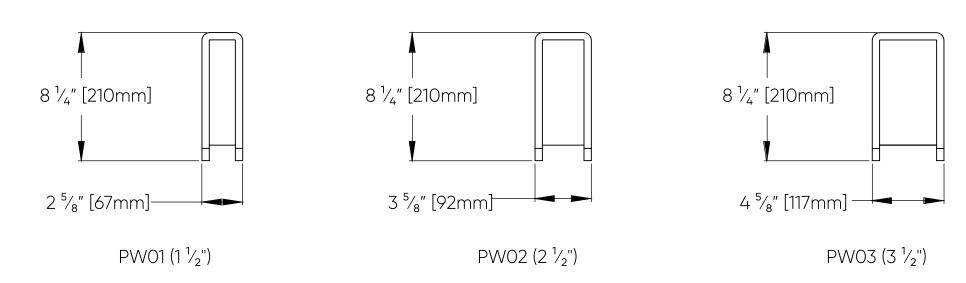

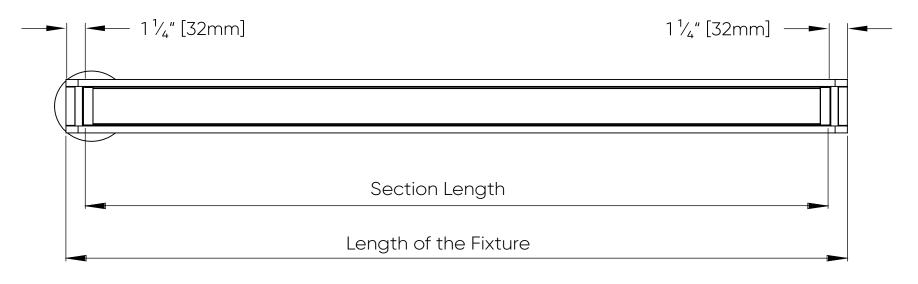

Section Length	Length of the Fixture
2FT	26 ½" [673mm]
4FT	50 ½" [1282mm]
6FT	74 ½" [1892mm]
8FT	98 ½" [2501mm]
10FT	122 ½" [3111mm]
12FT	146 ½" [3721mm]



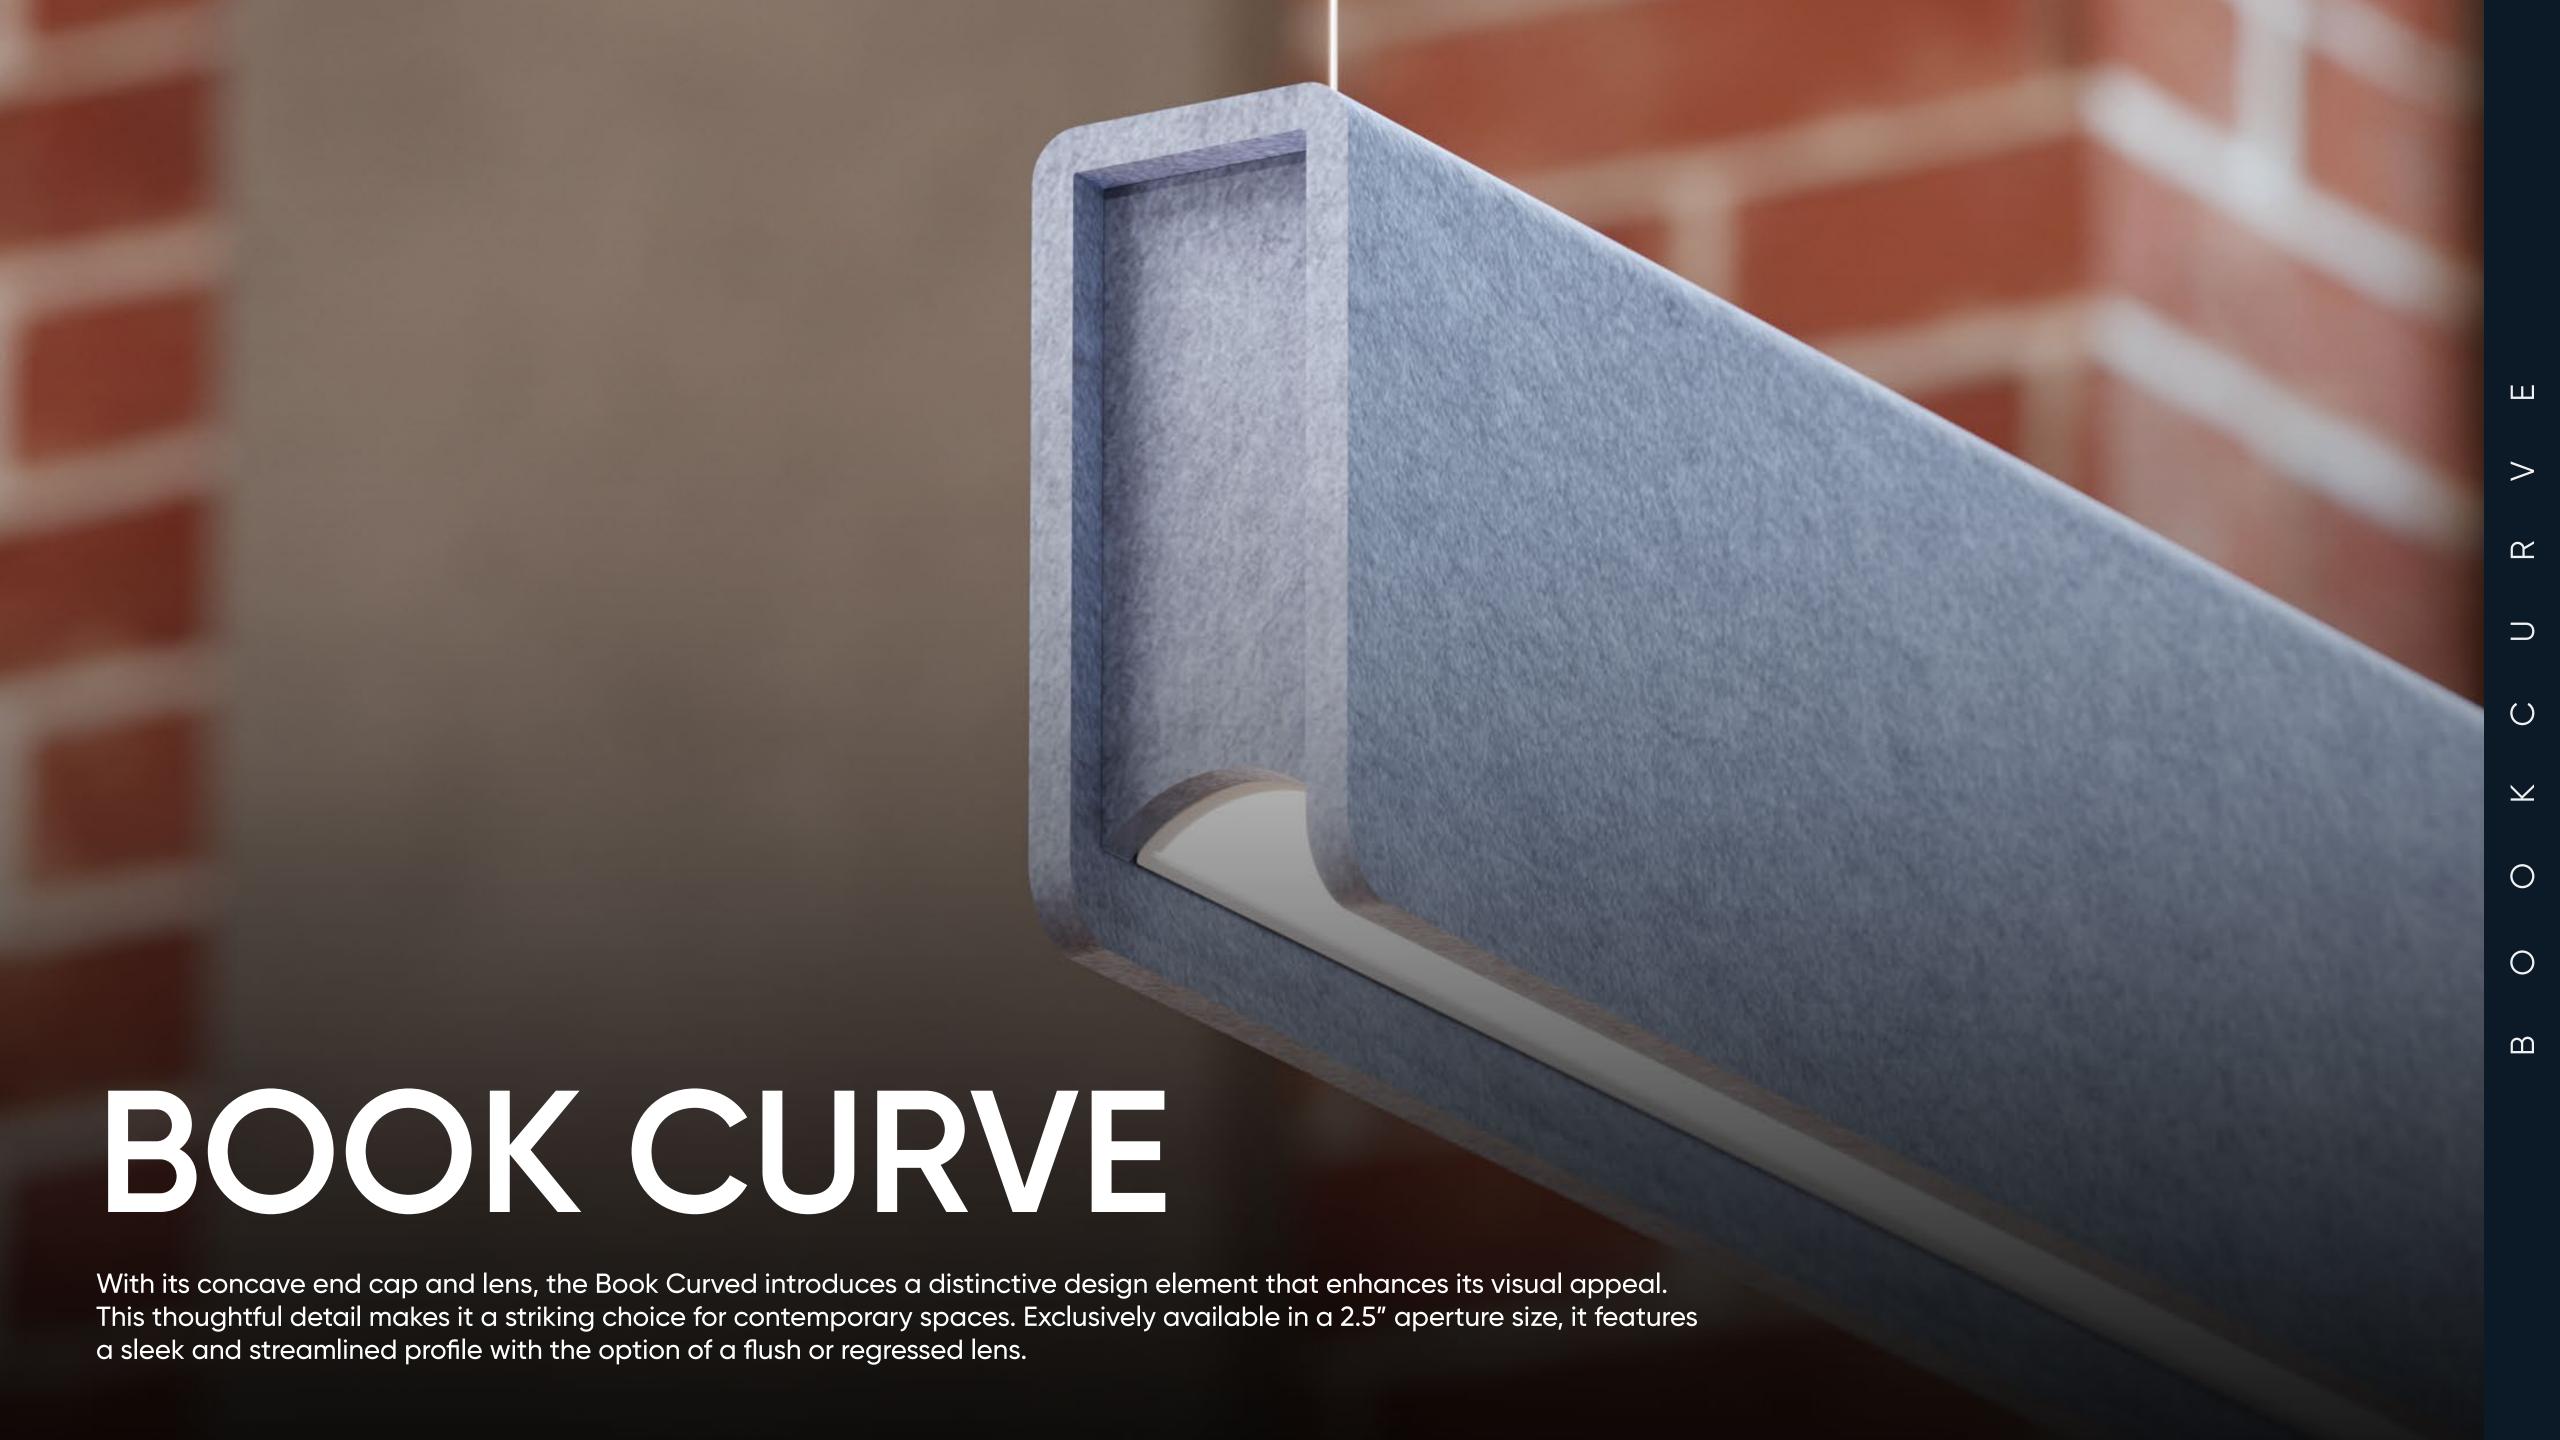

Direct





A comfort-focused lens designed to deliver soft and uniform light, creating a welcoming and glare-free environment. This solution is perfect for spaces that demand consistent, soothing illumination, ensuring visual ease and enhancing the overall lighting experience.






Book Curve Flush Comfort:

A comfort-focused lens with a slightly wider beam, crafted to deliver soft, uniform lighting that creates a warm, glare-free environment. Perfect for spaces needing consistent and soothing illumination, it also offers the added benefit of the flush lens's enhanced performance.

Indirect

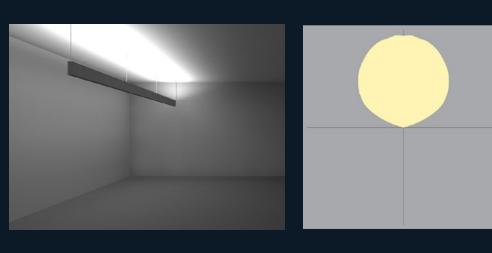


Diffused:

The opal lens for indirect lighting ensures smooth and even light distribution, reducing ceiling glare and enhancing ambient brightness. Perfect for creating a welcoming atmosphere with gentle, reflected light.



Batwing:


Delivers a 120° beam, distributing light upward toward the ceiling and reflecting it back into the space. This creates balanced, glare-free ambient lighting, ideal for classrooms, offices, and workspaces.

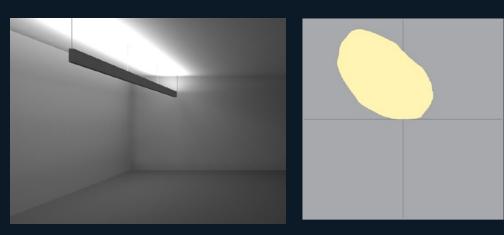

Asymmetric:

The asymmetric optic directs angled light to enhance walls, create spaciousness, and deliver balanced, dynamic effects—ideal for highlighting architectural elements.


BOOK CURVE OPTICS

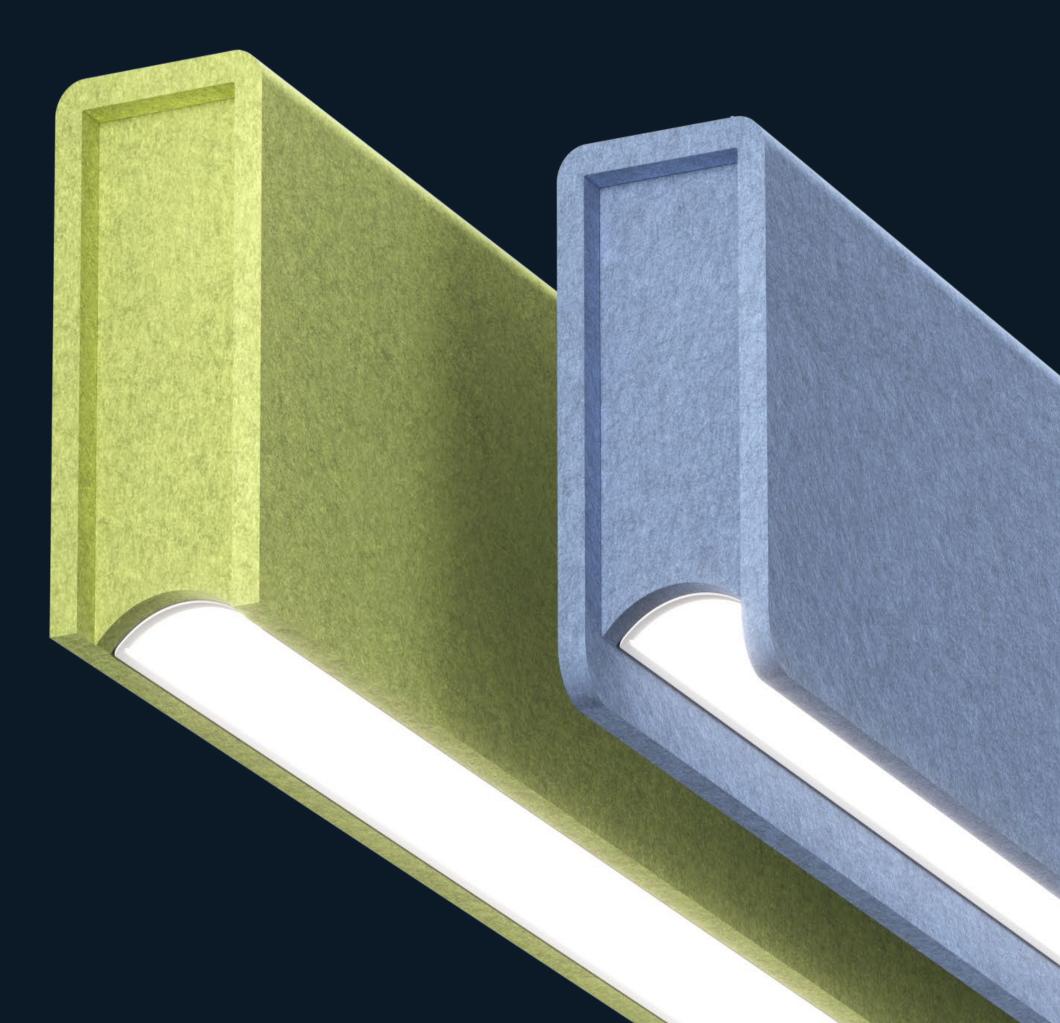


DIMENSIONS


BOOK CURVE can be configured as a continuous run up to 50ft on a single circuit. Start with a minimum length of 2ft and add increments of 2ft.


Section Lengths

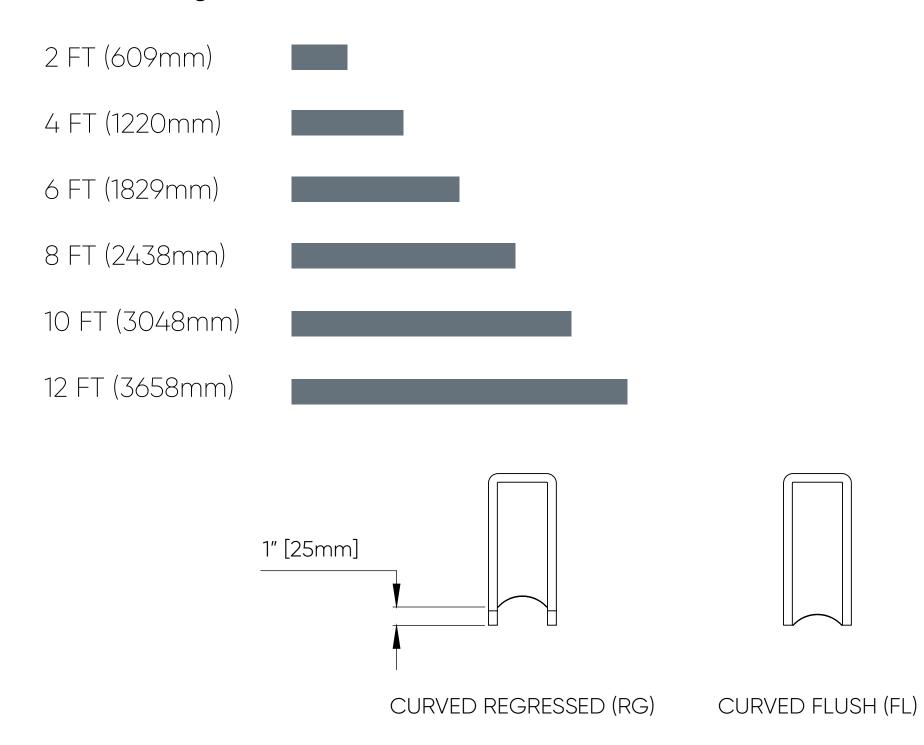

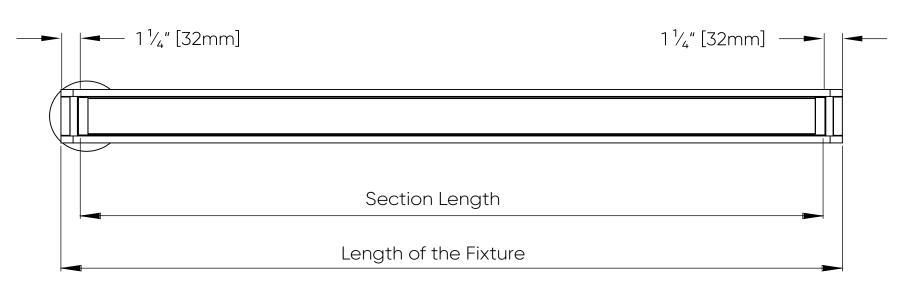

Section Length	Length of the Fixture
2FT	26 ½" [673mm]
4FT	50 ½" [1282mm]
6FT	74 ½" [1892mm]
8FT	98 ½" [2501mm]
10FT	122 ½" [3111mm]
12FT	146 ½" [3721mm]

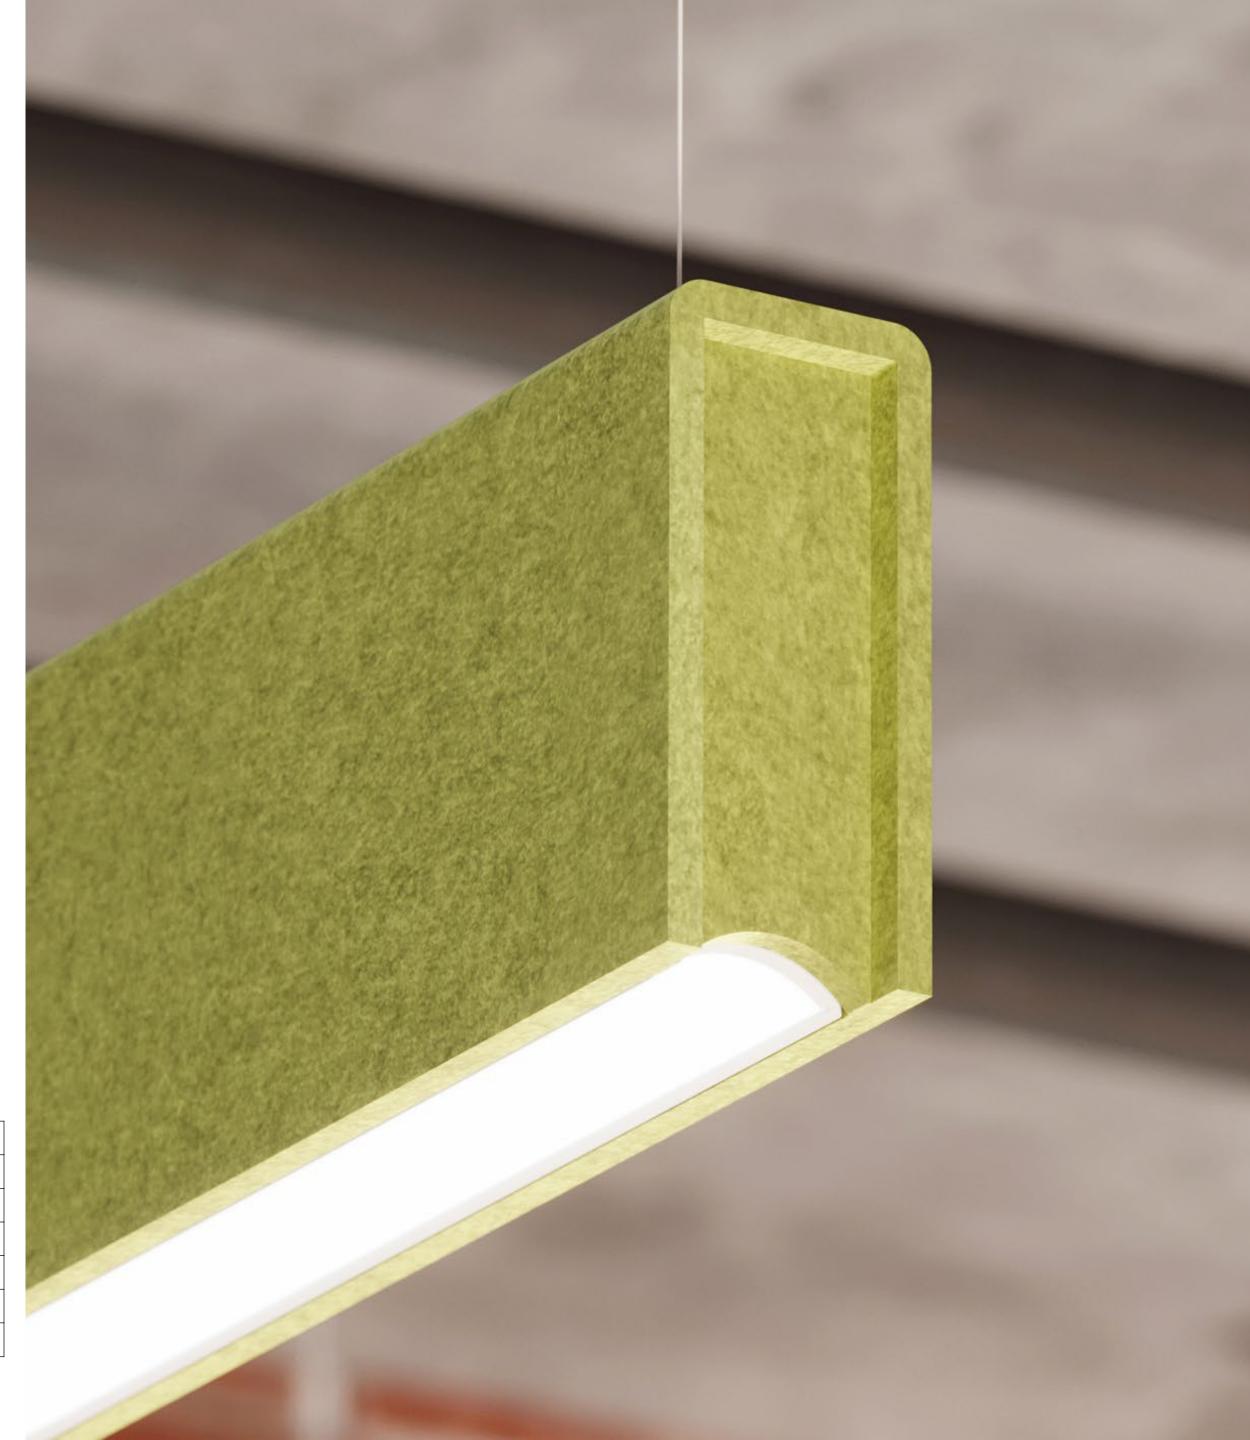

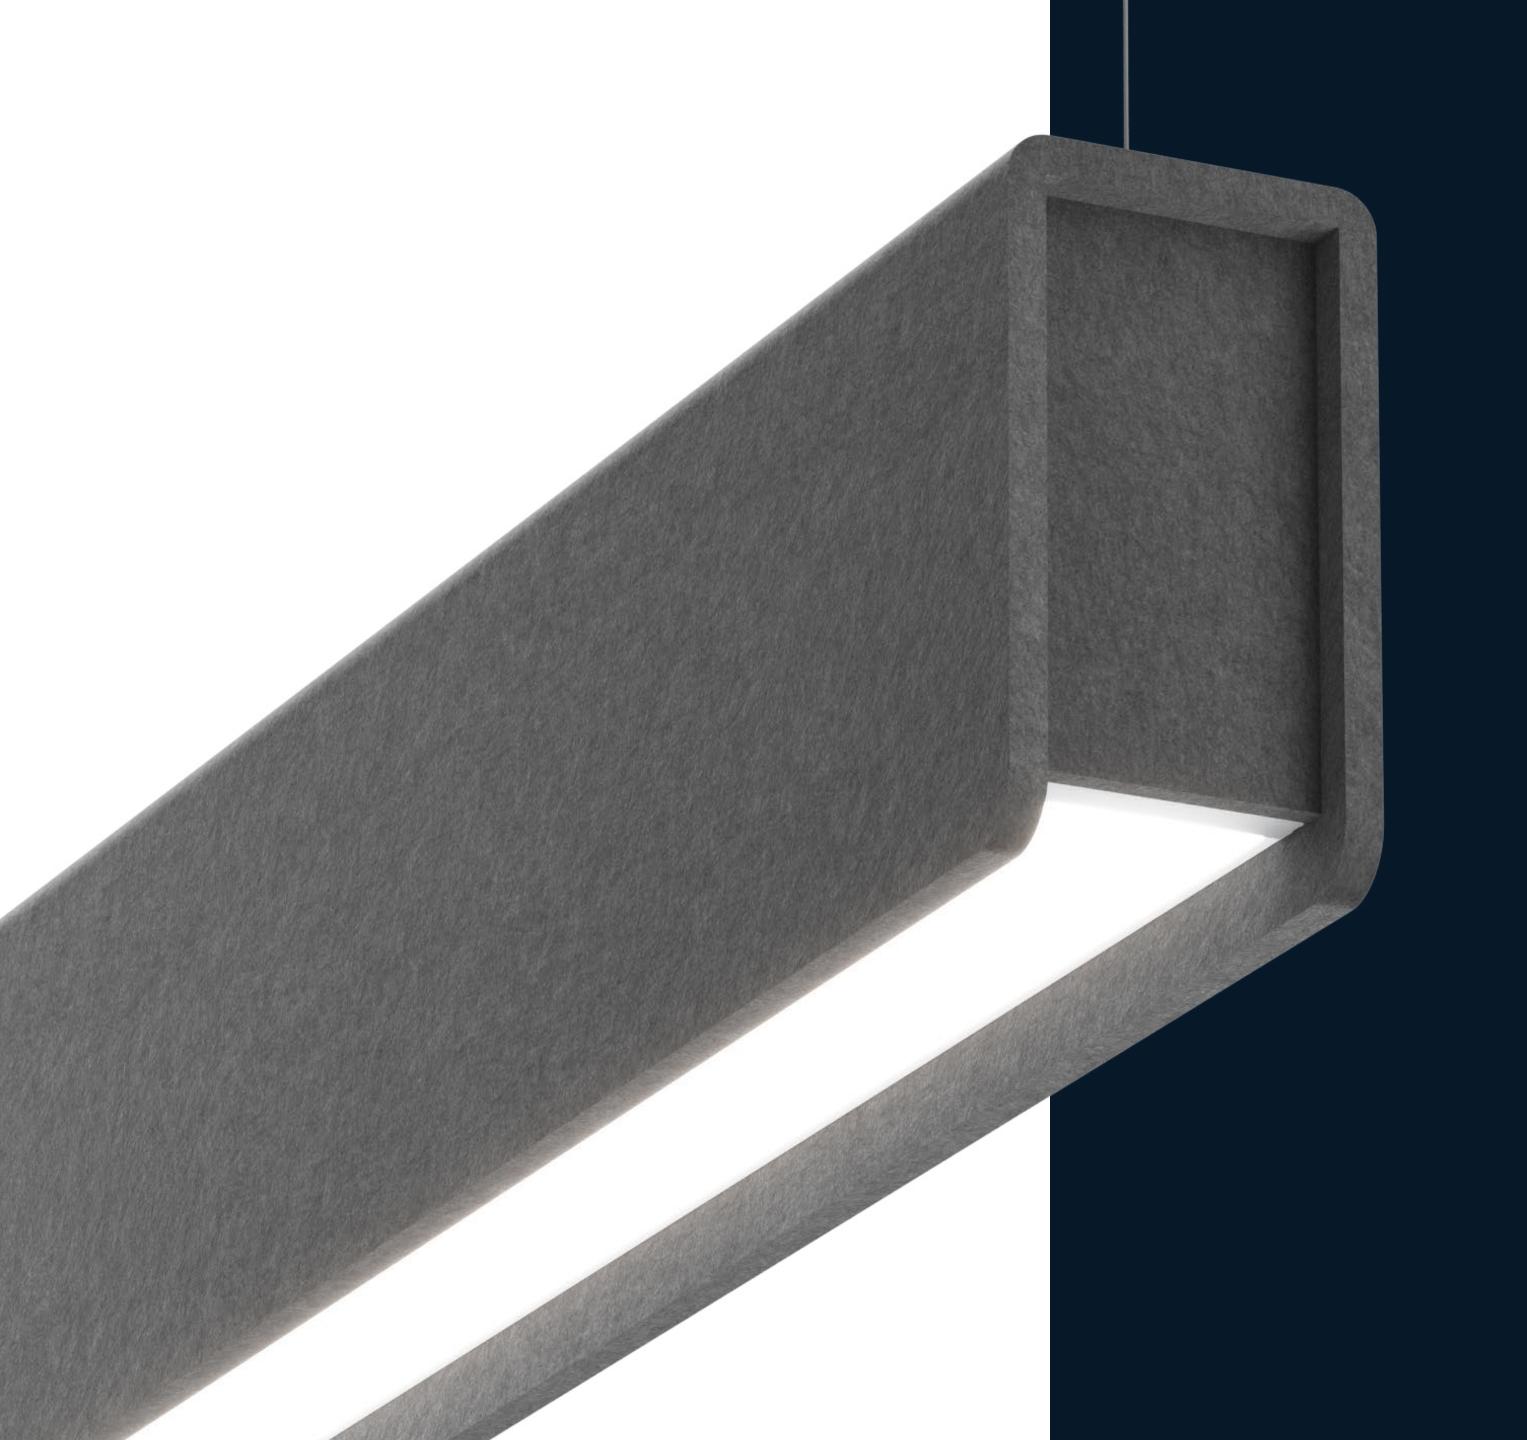

TECHNICAL SPECIFICATIONS

Lumen packages:

Direct: 200 LM/FT to 1400 LM/FT

Indirect: 200 LM/FT to 1200 LM/FT

CCT:

2700K, 3000K, 3500K, 4000K, RGBW, BIOS, Tunable White

CRI

80+ or 90+

Light Distribution:

Direct: Diffused

Indirect:

Batwing, Diffused, Asymmetric

Circuits:

Single & Dual

Emergency:

Integral

Emergency generated circuit

Dimming (Integral Drivers):

0-10V Dimming to 1.0% and 0.1%

Dali Dimming to 1.0% and 0.1%

DSI/switchDim

Sensors:

PoE

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.


Design:

Mirko Rotondi

US Pat. No. D994,186

TIMELESS

LOUVER DESIGN

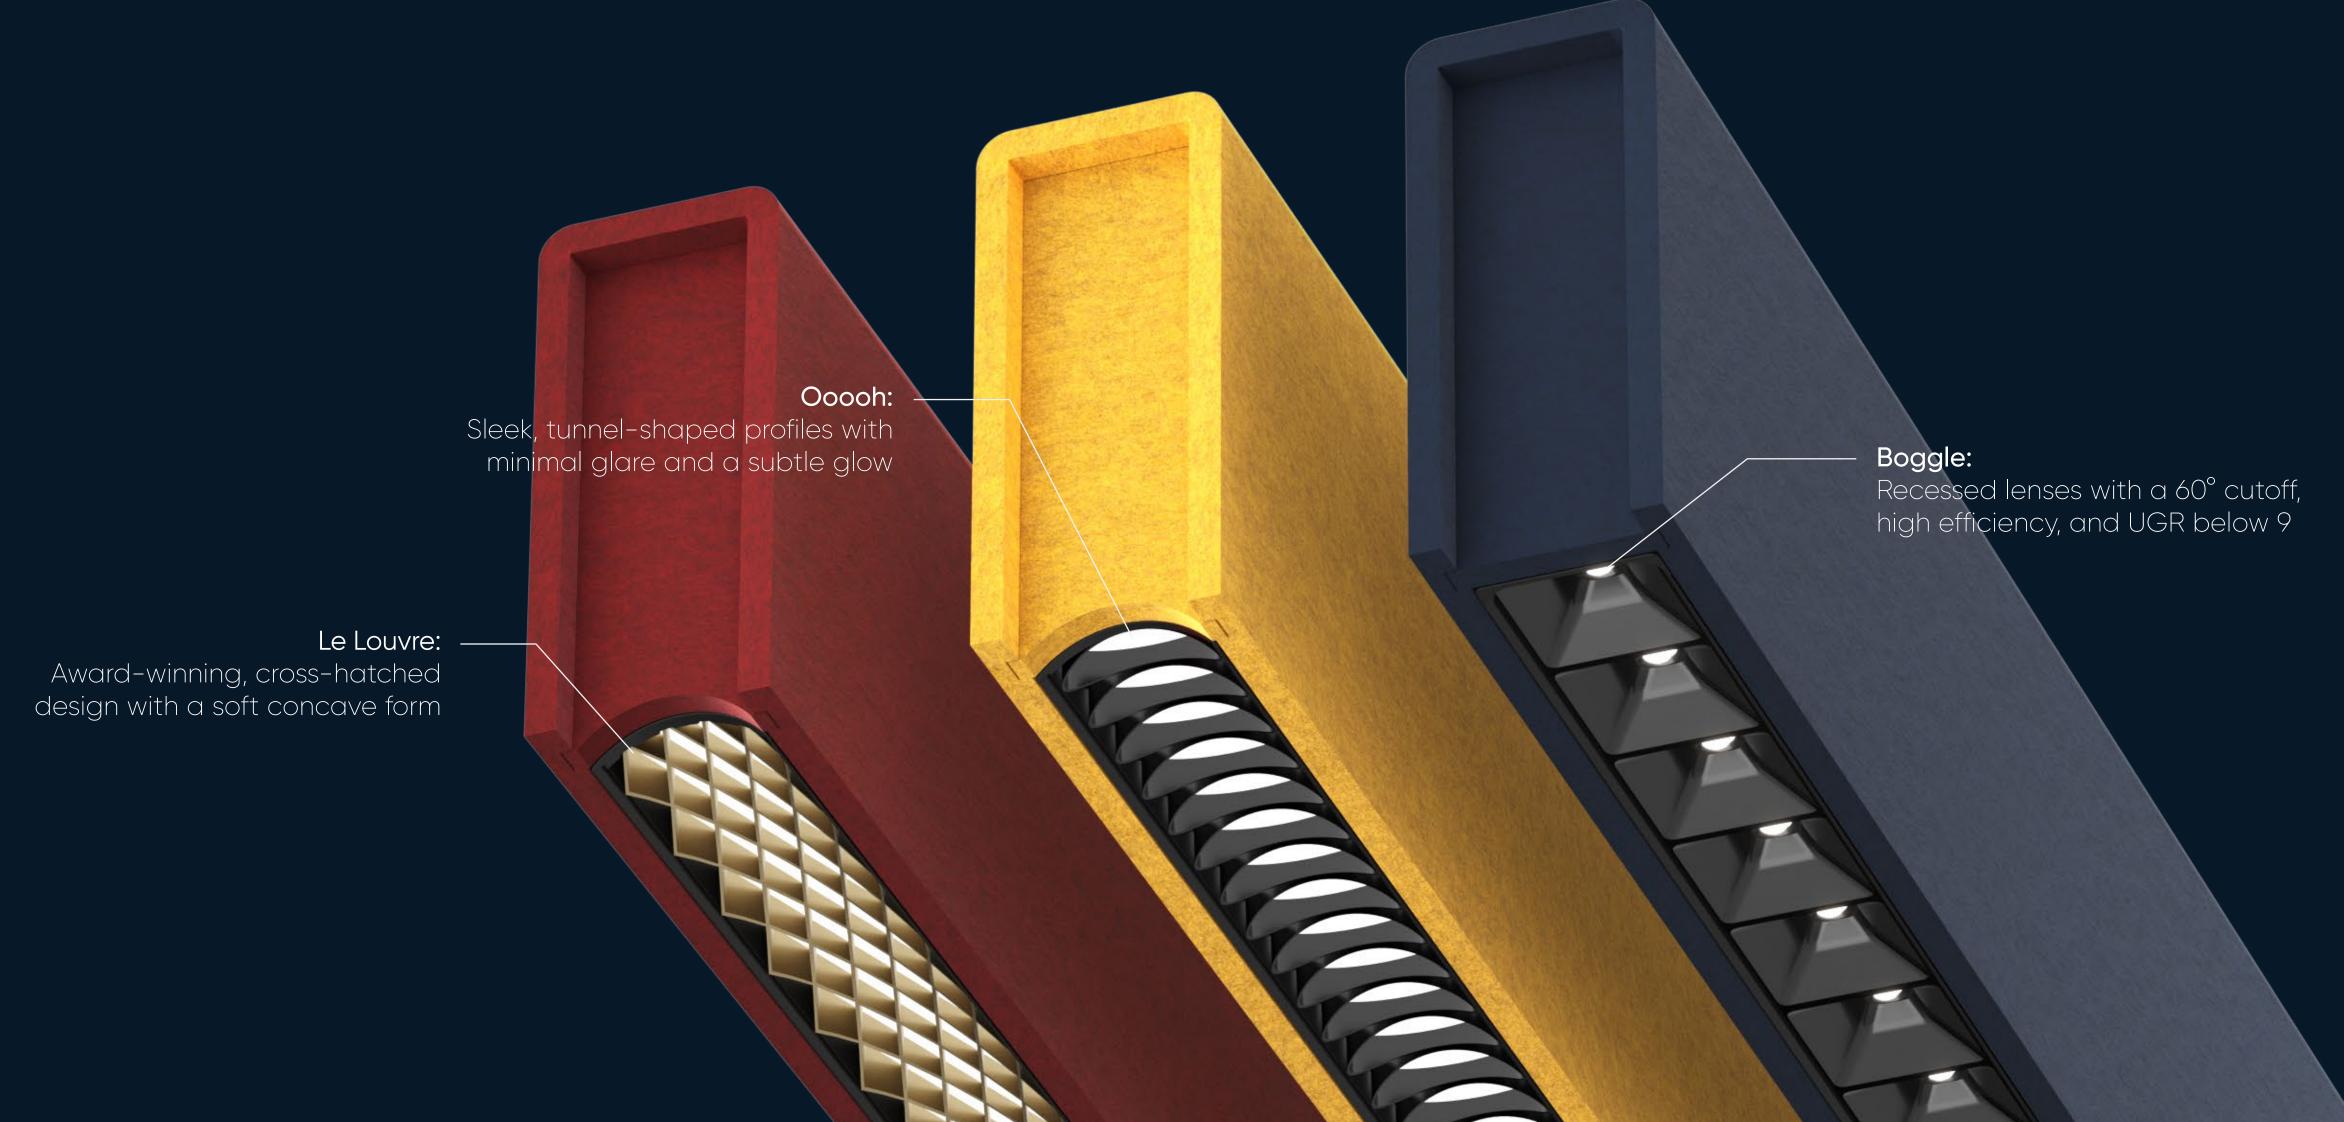



Boost Health and Wellness

with Circadian Lighting


Modern living confines building occupants to artificial lighting for 90% of their time. While functional, it lacks the vital circadian signals present in natural sunlight. This disconnect disrupts the internal clock, impacting various aspects of occupant health, including alertness, mood, sleep quality, and even long-term well-being.





Introducing BOOK Linear with BIOS SkyBlue™ Integration

BIOS SkyBlue represents a groundbreaking advancement in lighting technology which can be integrated with the BOOK linear collection. It incorporates the essential blue-sky signals (490nm) that the human body relies on to maintain a healthy circadian rhythm, promoting well-being and aligning indoor lighting with natural light cycles.

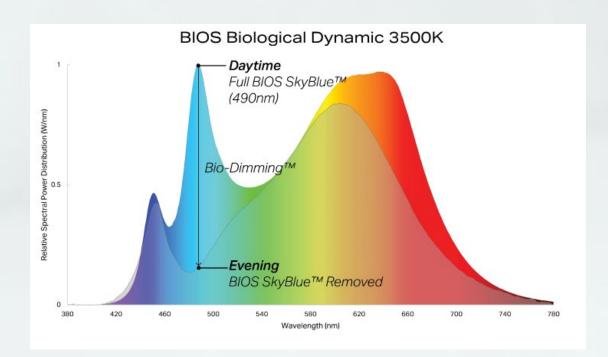

BENEFITS OF INTEGRATED CIRCADIAN LIGHTING

Enhanced Circadian Regulation

BIOS SkyBlue promotes healthier sleep-wake cycles for building occupants, leading to improved overall health and well-being.

Increased Alertness and Productivity

Experience sharper focus and a more energized workday for occupants.

Elevated Mood

Foster a positive and productive work environment with a boost in occupant emotional well-being.

Improved Sleep Quality

BIOS SkyBlue can help occupants fall asleep more easily and achieve a more restful night's sleep.

UNCOMPROMISING QUALITY FOR BUILDING SUCCESS

BIOS SkyBlue prioritizes exceptional quality without compromise, ensuring optimal performance and occupant comfort.

Industry-Leading Melanopic Ratios

Delivers optimal circadian stimulation at comfortable color temperatures (3000K, 3500K, 4000K).

Brilliant Color Rendering

Maintains exceptional visual comfort with a CRI of 80+ and R9>90.

Simple and Flexible Controls

Single-channel dimming offers seamless compatibility with 0-10V, wireless controls, and even 2-channel systems for easy integration into existing building management systems.

WELL Building Standard™ Compliance

Contributes to achieving WELL certification for projects, signifying a commitment to creating healthier spaces.



FOSTERING WELL-BEING IN EVERY SPACE

Offices

Boost employee focus, productivity, and energy levels throughout the day, creating a more dynamic and positive workplace.

Educational Institutions

Enhance students' concentration and learning by encouraging healthy sleep-wake patterns and sharper cognitive abilities.

Healthcare Facilities

Foster a healing atmosphere for both patients and staff by improving sleep quality, reducing stress, and enhancing overall wellness.

Senior Living Facilities


Elevate residents' sleep quality and daytime alertness, contributing to their overall well-being and life satisfaction.

Retail Spaces

Craft a more engaging shopping experience for customers by enhancing alertness and fostering positive emotions.

BOOK with integrated circadian lighting offers a groundbreaking approach to lighting. Embrace the science of natural light and unlock the potential for a healthier, more productive built environment.



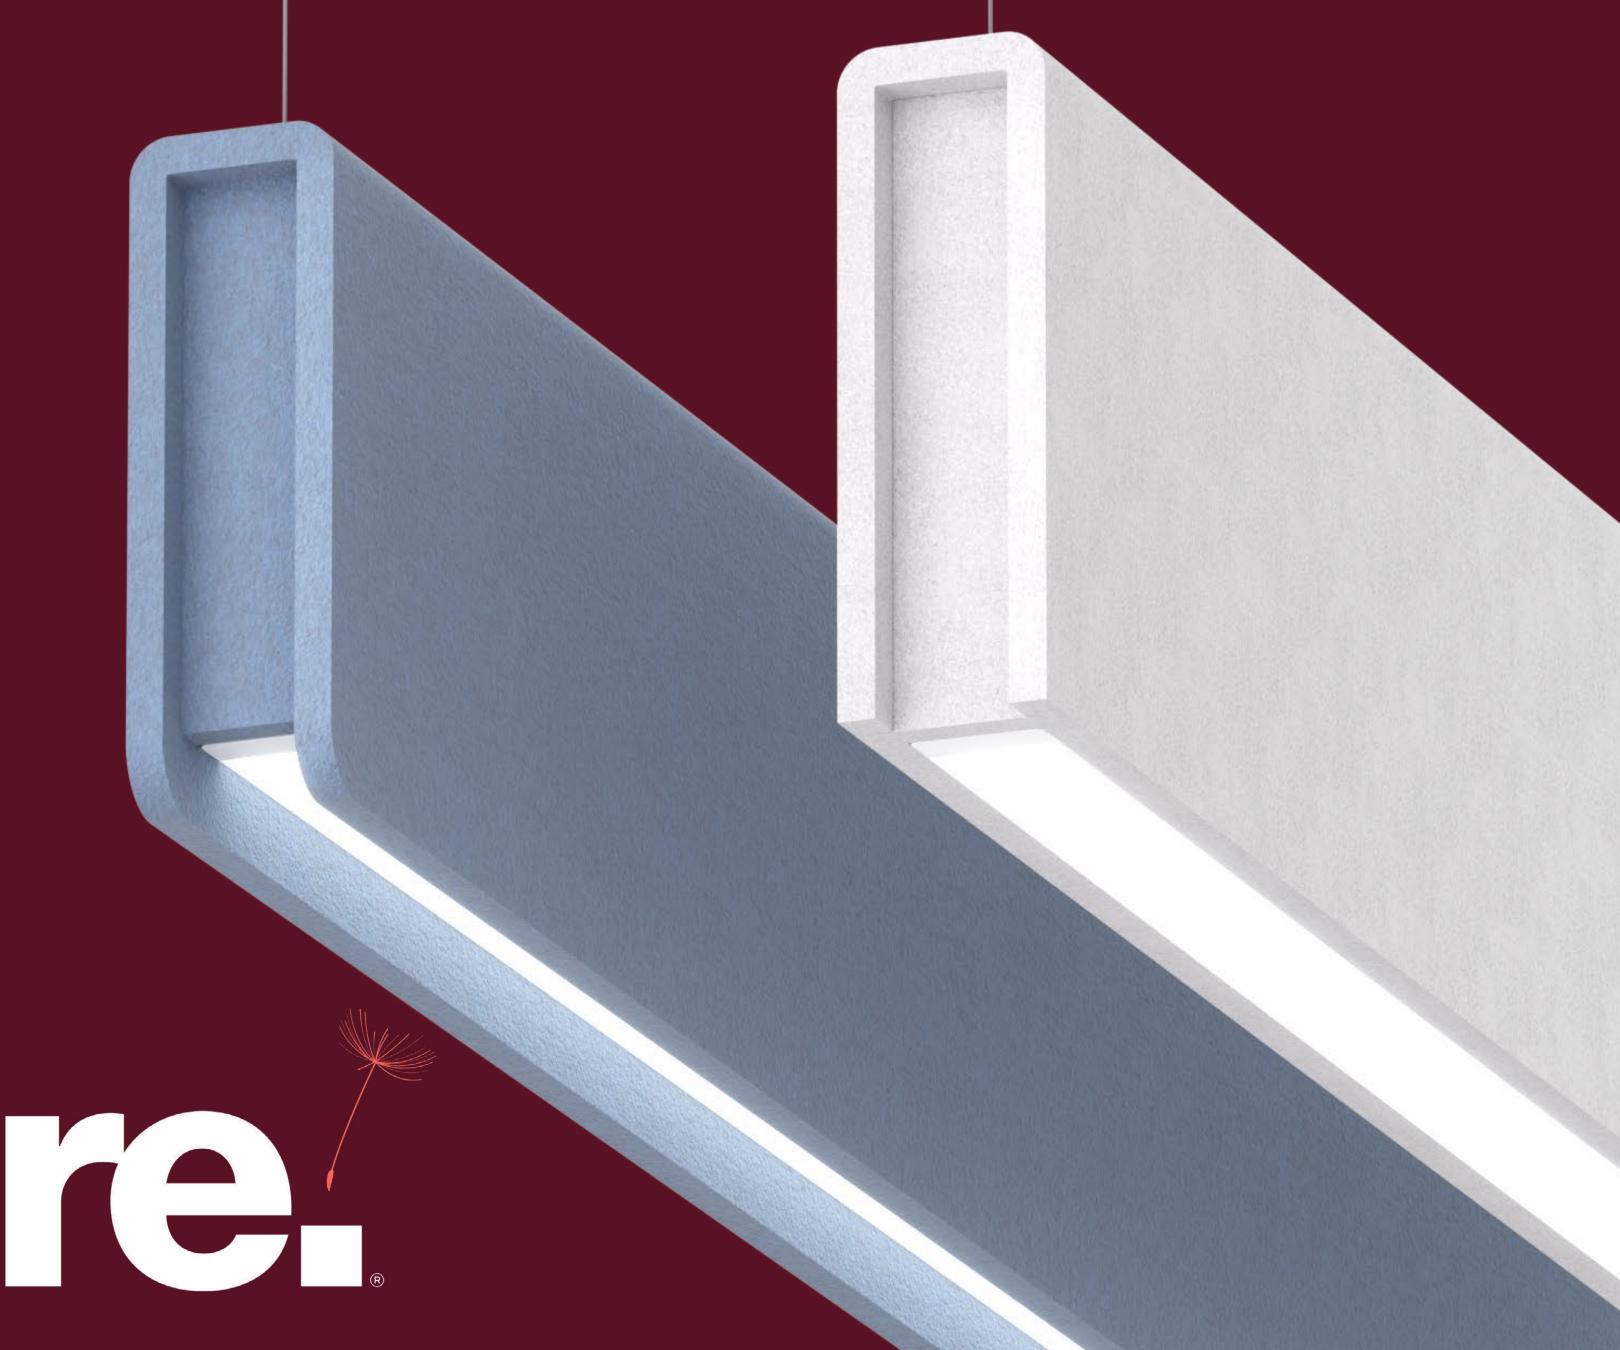



Linear Series BETA-CALCO INC

Final Assembly: Toronto, Ontario, Canada Life Expectancy: 5 Year(s) End of Life Options: Recyclable (99.6%), Landfill (0.4%)

Aluminum; Small Electrical Components - RoHS Compliant¹; Polymethyl methacrylate; Steel; Acrylonitrile-Butadiene-Styrene Copolymer; Iron; Carbonic acid, polymer with 4,4'-(1methylethylidene)bis[phenol]; Copper; Manganese; Phenol, 4,4'-(1-methylethylidene)bis-, polymer with 2,2'-[(1methylethylidene) bis(4,1-phenyleneoxymethylene)]bis[oxirane]; Silicon; Polyvinyl chloride; Magnesium; Antimony oxide (Antimony trioxide); Magnesium, [carbonato(2-)]hexadecahydroxybis(aluminum)hexa-; Tin, Organic: Tris(2-ethylhexyl) trimellitate; Titanium dioxide; Octadecanoic acid, calcium salt; Zinc; Phosphoric acid, 2ethylhexyl diphenyl ester; Chromium, metallic; 1,3,5-Triglycidyl-striazinetrione; Methyl Ethyl Ketone; Titanium; Nickel (Metallic); 2-Methylimidazole; Carbon black; magnesium dioxide; Cyclohexanone

LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:

LILBC Red List Free □ LBC Red List Approved VOC Content: Not Applicable

% Disclosed: 100% at 100ppm

■ Declared

I-10 Interior Performance: Not Applicable I-14 Responsible Sourcing: Not Applicable

BET-0001

Original Issue Date: 2023

INTERNATIONAL LIVING FUTURE INSTITUTE" Ining-future.org/declare

V/HY DECLARE MATTERS

Every year, the building industry accounts for 39% of global carbon emissions, and the health impacts of the built environment are drawing increased scrutiny. In earning a Declare label for our linear and decorative line, we're joining over 200 manufacturers by responding to the market's demand for decreased emissions and increased transparency.



BETACALCO

Since 1941, we have held a passion for designing cutting-edge professional lighting that changes how spaces are illuminated while upholding the enduring principles of quality and craftsmanship.

Our objective is to work in lockstep with our clients by developing innovative products that meet their variegated design needs and comply with the latest energy and construction standards. Furthermore, our manufacturing infrastructure allows us to scale products and satisfy niche design requirements.

We use leading-edge wellness technologies including BIOS, Tunable White, and Dim to Warm; and employ open-source connectivity to intelligent control systems, including Power over Ethernet.

Our customer-centric approach to service and product design is the basis of our reputation and how we have become a key lighting supplier across the globe.

betacalco.com

sales@betacalco.com









