

Fixture comes partially assembled.



Ensure electrical circuit is disconnected before installation.




Luminaires must be installed in accordance with national electrical code and local regulation.


CYLINDER™ FLUID™

FIXTURE NAME: CYLINDER
FIXTURE CODE: CYXW/CYLC/CYXP
TYPE: WALL


- ① Using the **Wall Bracket** as marking template, prepare the mounting holes for #8 screw wall anchors
- ② Insert **Wall Anchors** on the pre-drilled holes on the wall
- ③ Apply watertight **Sealant** around the perimeter of the junction box
- ④ Secure **Wall Bracket** to the wall using **#8 Mounting Screws**
- ⑤ Tuck all the wires inside the junction box and mount the **Rubber Grommet** to the hole in the **Wall Bracket**
- ⑥ Fix the **Luminaire** into the **Wall Bracket** using **#8-32 Flathead Screws (2X)**
- ⑦ Apply watertight sealant along the edge of the light fixture that is in contact with the wall
- ⑧ Refer to supplementary page for the additional installation instructions

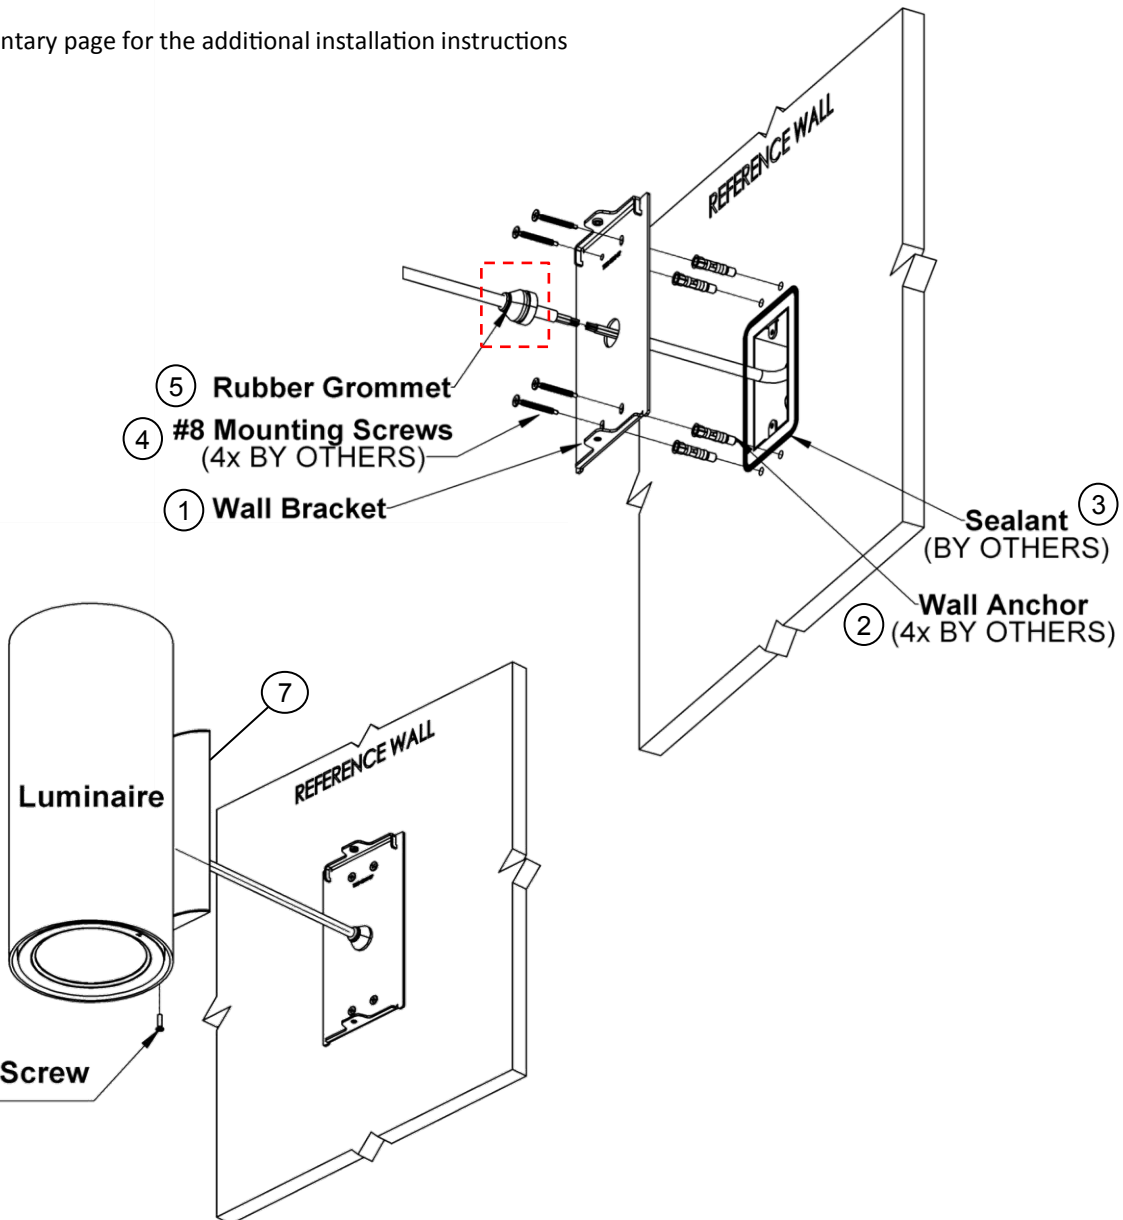

- ① Using the **Ceiling plate twist lock adaptor** as marking template, prepare the mounting holes for **#8 mounting screws**
- ② Apply **Sealant** around the perimeter of the junction box
- ③ Secure aforementioned plate to the ceiling using **#8 Mounting Screws**. Ensure grooves of **Ceiling plate twist lock adaptor** align with the mounting holes
- ④ Tuck all the wires inside the **Junction Box** and mount the **Rubber Grommet** to the hole in the **Ceiling plate twist lock adaptor**
- ⑤ Fix the **Luminaire** into the ceiling by pressing into the ceiling and rotating clockwise following the **Key Lock Mount** direction
- ⑥ Refer to supplementary page for the additional installation instructions

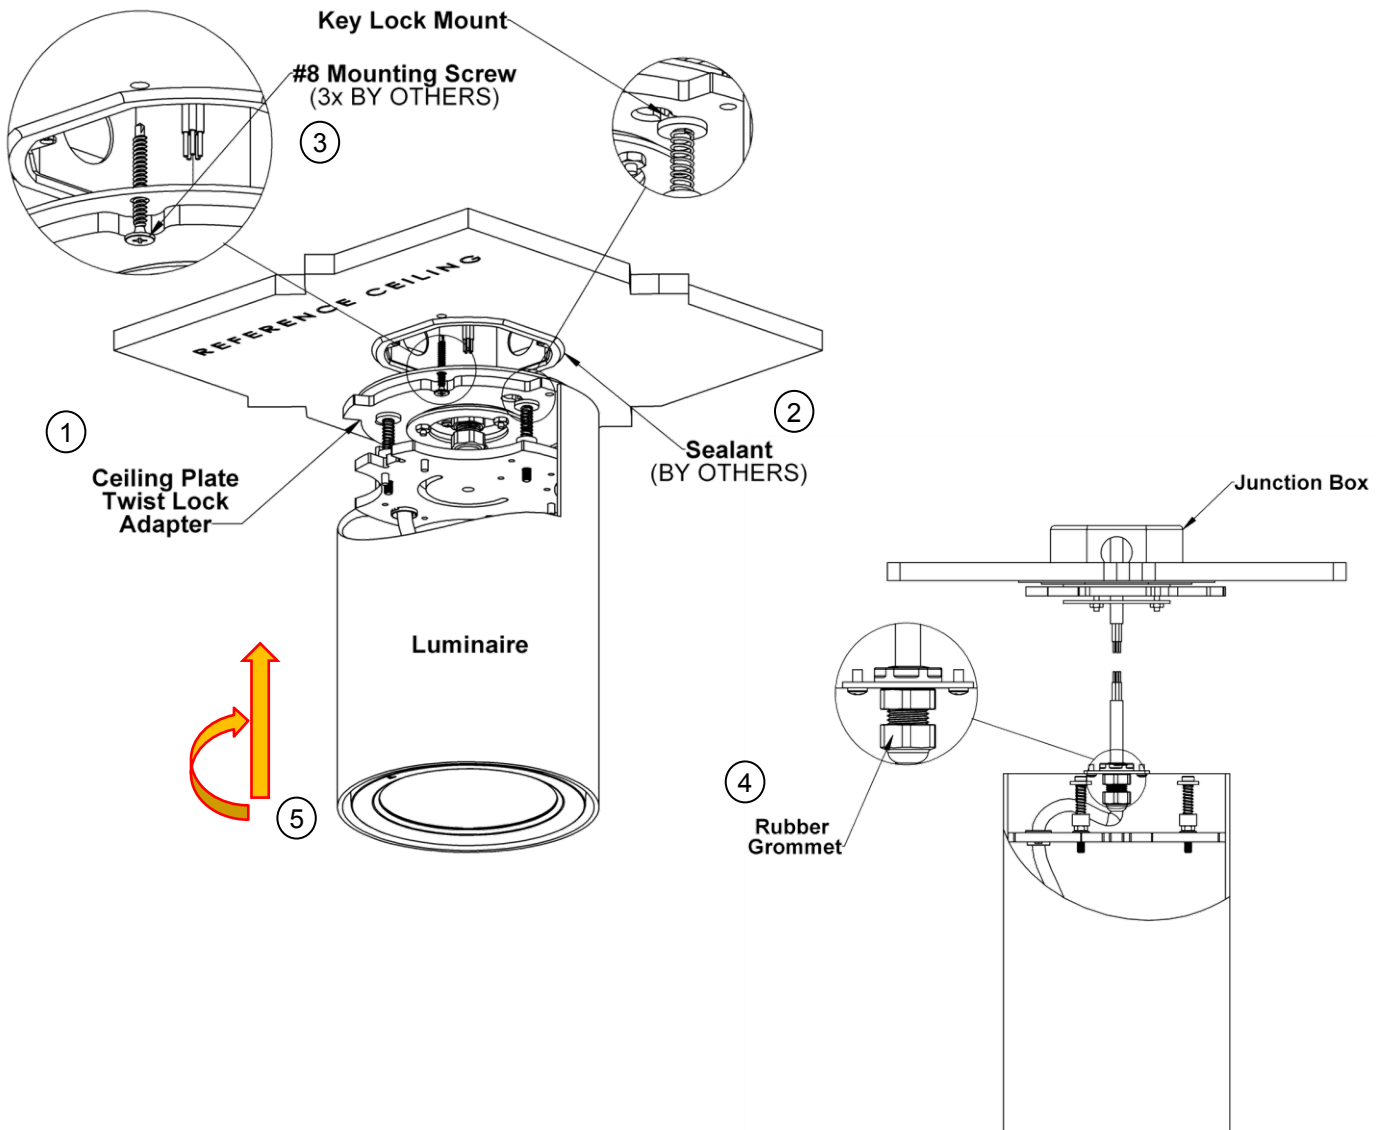


- ① Using the **Canopy Assembly** as marking template, prepare the mounting holes for **#8 mounting screws**
- ② Apply **Sealant** around the perimeter of the junction box
- ③ Secure aforementioned canopy to the ceiling using **#8 Mounting Screws**.
- ④ Tuck all the wires inside the **Junction Box** and mount the **Rubber Grommet** to the hole in the canopy bracket
- ⑤ Mount the **Brass Knuckle** to the canopy bracket
- ⑥ Fix the **Luminaire** into the ceiling using provided **6-32 Machine Head Screws**
- ⑦ Refer to supplementary page for the additional installation instructions

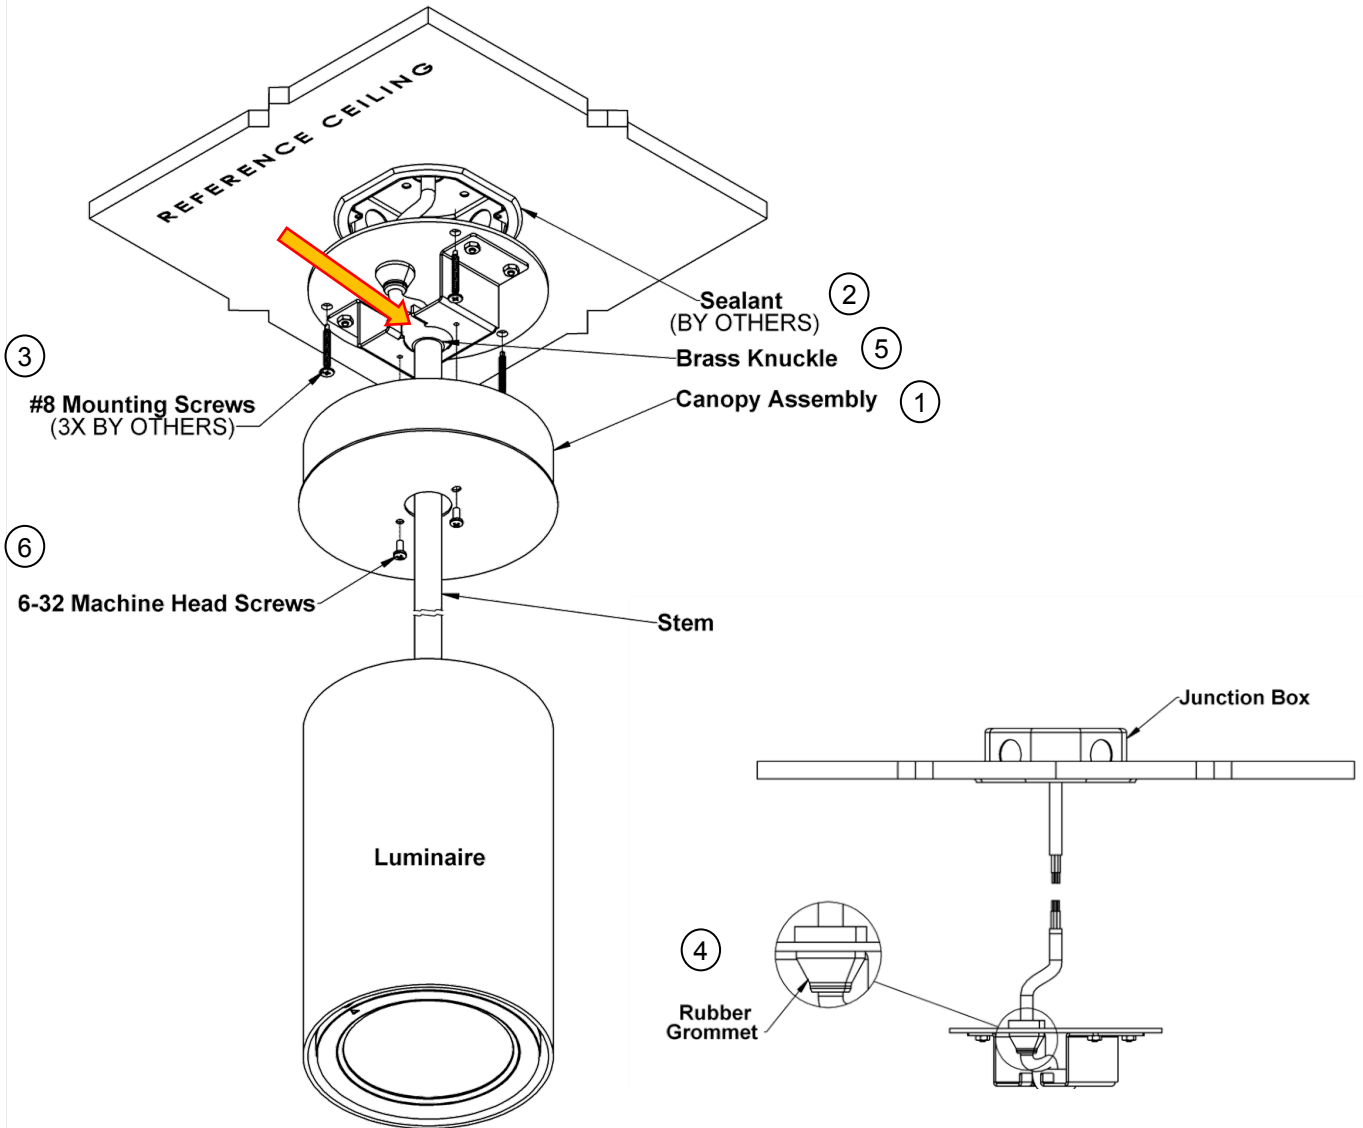

SUPPLEMENTARY INSTRUCTIONS

- 1 Please refer below for the **Recommended Electrical Box** for each type of wall mount on the Cylinder Luminaire

Recommended Electrical Boxes

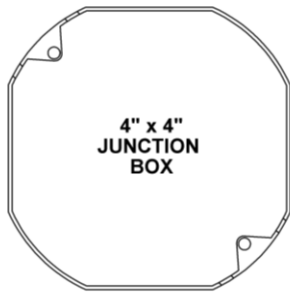

**CLASSIC
MOUNT**



**NARROW
MOUNT**

- 2 Use the **Lens Angle Adjustment Tool** to modify the lens angle by inserting the tool in the direction of the **Indicating Arrow**. Ensure the tool is fully engaged with the **Adjustment Pin** for changing the lens angle

