BLOCK™ - HARD CEILING TRIM
INSTALLATION INSTRUCTIONS

1 IMPORTANT NOTE

Fixture comes partially assembled.

Ensure electrical circuit is disconnected before installation.

Luminaires must be installed in accordance with National electrical code and local regulation.

2 STANDALONE INSTALLATION


STEP 1
Using Table 1 and 2 for reference, cut the opening in the ceiling material.

Table 1

Fixture length	4ft	6ft	8ft	12ft	continuous
A (in)	49	73	97	145	OAL+1"


Table 2

Aperture	1.5	2.5	3.5
B (in)	2.2	3.2	4.2

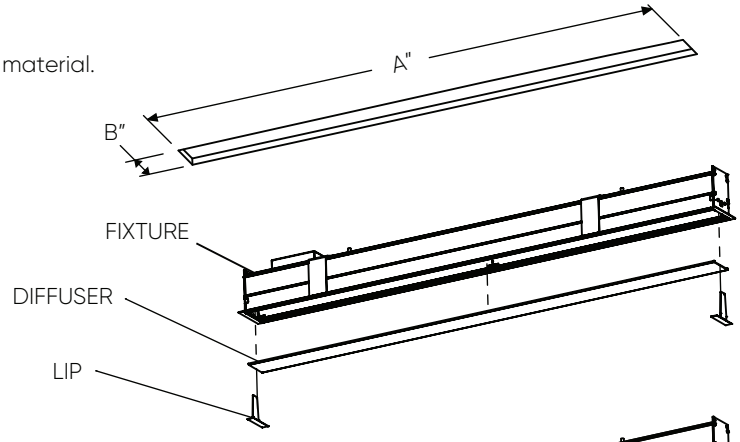


STEP 2
Remove the lip from the end plate.

STEP 3
Remove the diffuser.

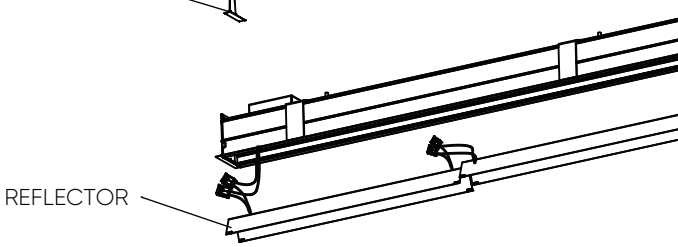


STEP 4
Remove reflectors with LED boards.
Disconnect wiring between the reflector and fixture.


STEP 4
Remove reflectors with LED boards.
Disconnect wiring between the reflector and fixture.

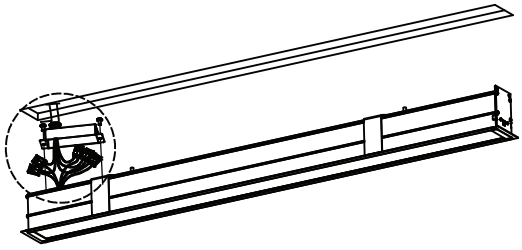

STEP 5
Remove the power box from the top of the fixture.
Install BX cable (by others) through the metal conduit connector (by others) and install onto the power box.
Make electrical connections between wires of BX cable and fixture wires according to the wires labeling.
Place the connected wires inside the power box.
Reinstall the power box to the fixture.

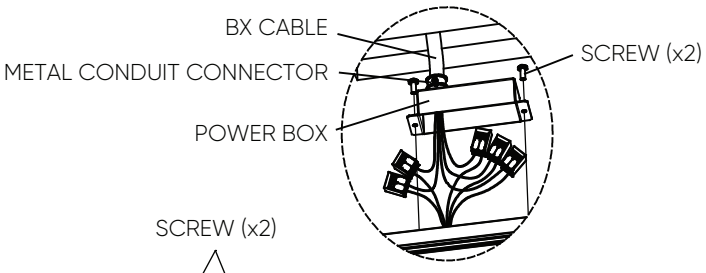

To gain access inside the power box when the fixture is installed on the ceiling, remove the power box cover inside the fixture by loosening two screws.



BETACALCO

1400 Whitehorse Road,
Toronto, ON M3J 3A7

+1 416-531-9942
info@betacalco.com


betacalco.com

STEP 6
Insert the fixture into the ceiling cutout. Turn the drywall bracket screws to rotate the drywall brackets into place. Tighten the drywall bracket screws to lock them into place and secure the fixture to the ceiling.

STEP 7
Reinstall reflectors with LED boards. (refer to step 4)

STEP 8
Reinstall diffuser. (refer to step 3)

STEP 9
Reinstall lip onto the end plate. (refer to step 2)
Now the power can safely be turned on.

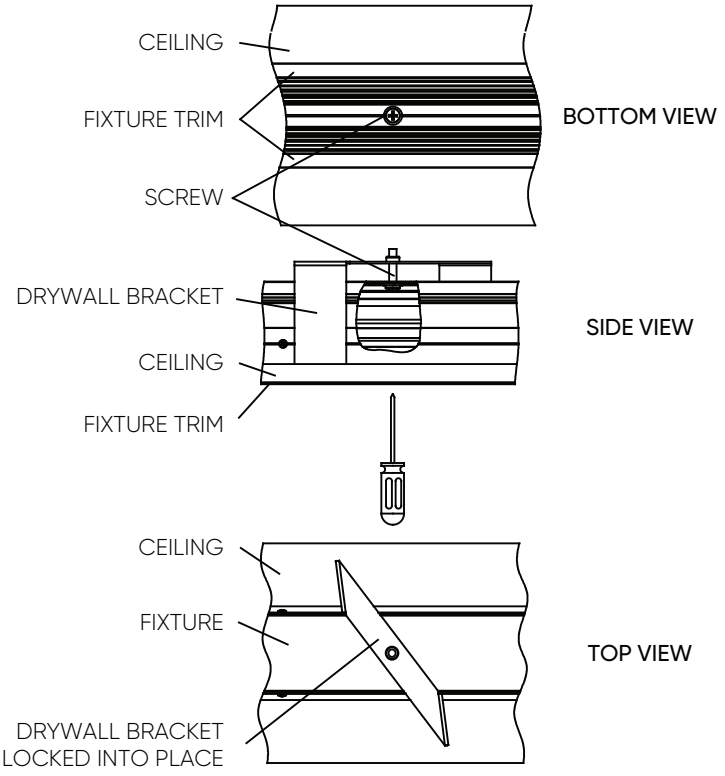


3 CONTINUOUS INSTALLATION


STEP 10
Start from the first section with the power box and repeat step 2-6.

STEP 11
For the second section repeat steps 2-4.

STEP 12
Lift this second section in the ceiling cutout and make the wiring connection between both sections.

STEP 13
Join both sections together by fastening the nut on the joiner bracket.

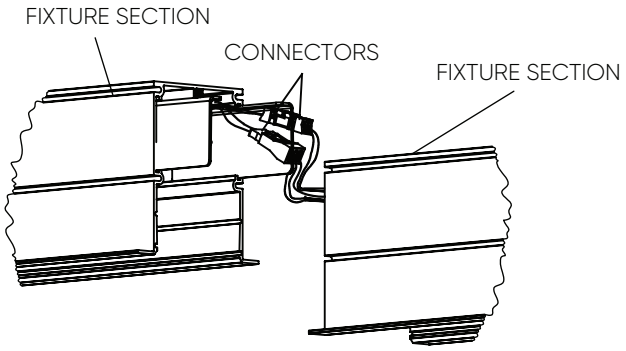

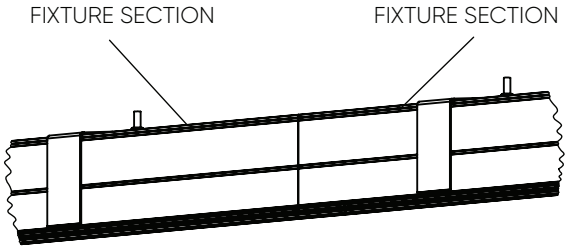


STEP 14
Repeat step 6 for the second section.

STEP 15
Reinstall reflectors with LED boards. (see step 4)

STEP 16
Reinstall diffuser. (see step 3)

STEP 17
Reinstall lip onto the end plate. (see step 2)


STEP 18
When all sections of the fixture is secure
to the ceiling, the power can safely be turned on.

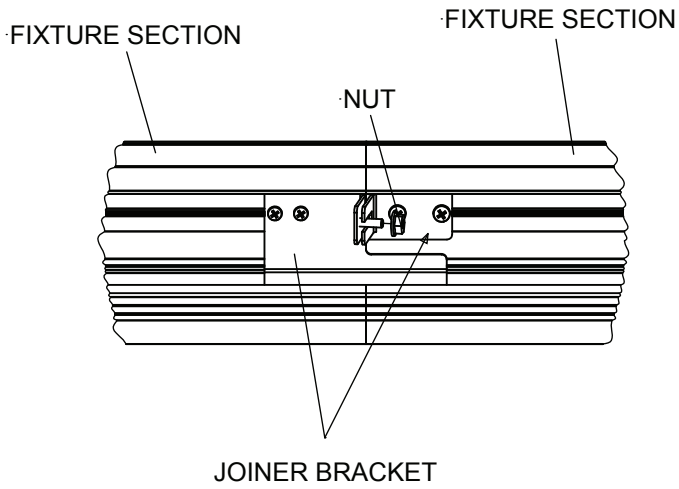


4 CONTINUOUS SEAMLESS DIFFUSER INSTALLATION

STEP 1
Measure entire fixture length from start end cap to the last end cap.
The desired seamless diffuser length can be between 0.27" to 1.17" shorter than fixture length.

STEP 2
Make a straight incision mark on the seamless diffuser using a box knife or cutting tool.

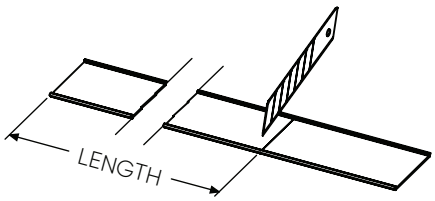



STEP 3
Snap at incision mark and install seamless diffuser.

