

1 IMPORTANT NOTE

Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 HUB REMOTE POS CANOPY AND SUSPENSION (SS7)

STEP 1

Fasten canopy on to J-box using holes shown above by short arrows and to ceiling with holes shown by long arrows. (FIG 1)

STEP 2

Top view of canopy with arrows pointing to ceiling mounting holes. (FIG 2)

STEP 3

After all connections are done in accordance with national and local electrical codes and regulations, install cover plate on to the canopy. (FIG 3)

STEP 4

Make fine adjustments to fixture height with glider. Lock position with set screw after adjustment. (FIG 4)

Bottom View - No cover

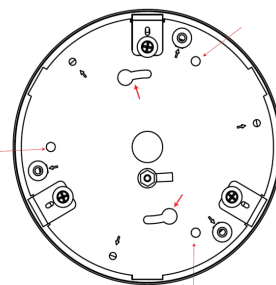


FIG 1

Top View

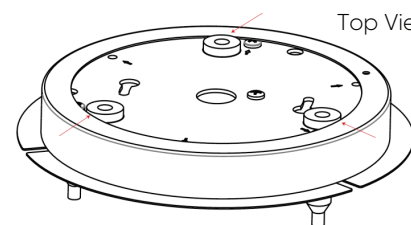


FIG 2

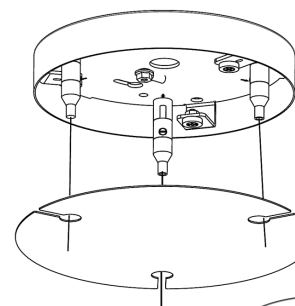


FIG 3





FIG 4

Installed Canopy



3 HUB INTEGRAL POS CANOPY AND SUSPENSION (SS9)

STEP 1

Fasten canopy on to J-box using holes shown above by short arrows and to ceiling with holes shown by long arrows. (FIG 1)

STEP 2

Top view of canopy with arrows pointing to ceiling mounting holes. (FIG 2)

STEP 3

After all connections are done in accordance with national and local electrical codes and regulations, install cover plate on to the canopy and fasten the final. (FIG 3)

STEP 4

Make fine adjustments to fixture height with glider. Lock position with set screw after adjustment. (FIG 4)

Bottom View - No cover

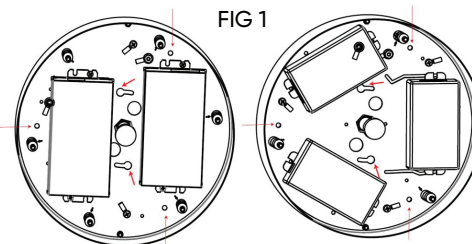


FIG 1

Top View

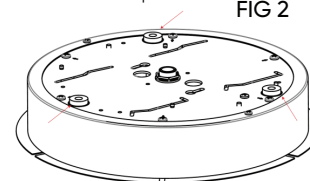


FIG 2

Installed Canopy

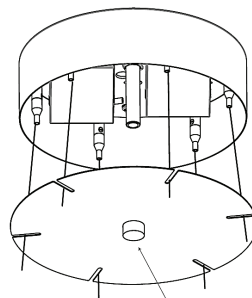



FIG 3




FIG 4

Final

⌚ Tighten screw.

3 REMOTE DRIVER BOX FOR SS7 SUSPENSION

STEP 1

Remove the screws and the drivers' box cover

STEP 2

Remove the necessary knockouts

STEP 3

Attach the conduits "NOT SUPPLIED"

STEP 4

Make the wiring connections

STEP 5

Re-attach the cover and secure it with the supplied screws

NOTE

Use the mounting brackets to secure the box in place to the structure of the ceiling (mounting screws by others)

Never touch the yellow portion of the led chip or damage may occur

When more than one remote box is supplied, they all must be connected to the same power supply branch circuit

Remote boxes should be accessible after installation

