

1 IMPORTANT NOTE

Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 INSTALLATION STEPS

STEP 1: OPEN THE LUMINAIRE

Lift the screw cover(s), unscrew the M5 socket cap screw, and remove the screw covers (see FIG 1).

STEP 2

Unfasten the gear tray mounting screws and remove the gear tray assembly.

STEP 3



Mark the locations for the two (2) wall anchors by aligning the fixture's power entry hole with the junction box. Remove the fixture and install the wall anchors. Pass the J-box supply conductors through the fixture's power entry hole, then attach the fixture to the wall using two appropriate mounting screws. Tighten both screws securely. Apply exterior-grade silicone around the screw heads to ensure proper sealing. Failure to do so will void the warranty.

STEP 4

Connect the fixture's supply conductors to the J-box power supply conductors inside the fixture. Reattach the gear tray assembly and secure it using the gear tray mounting screws.

STEP 5

Close the front cover, reattach the screw cover(s), and tighten the M5 screws. For fluorescent lamp versions, install the lamps before closing the front cover.

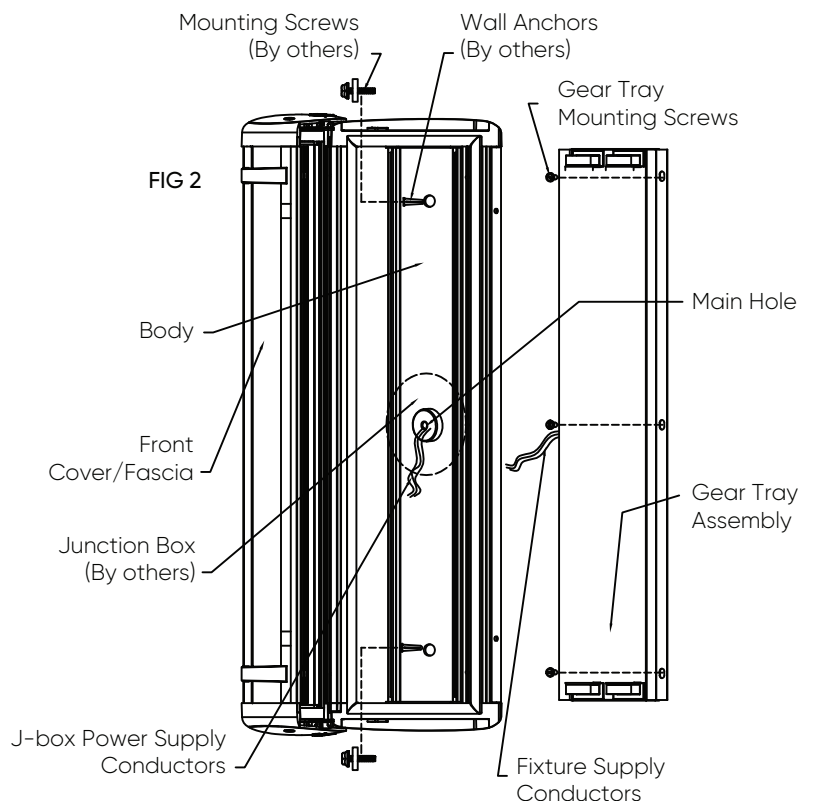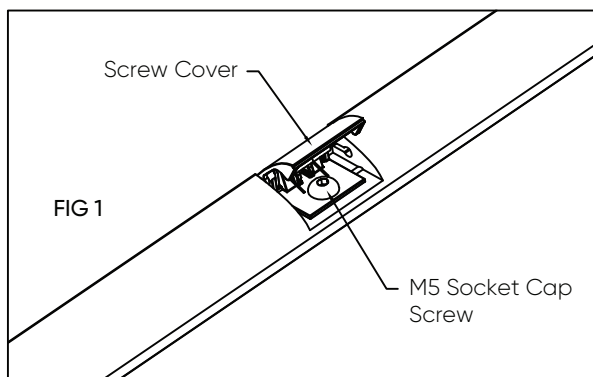

3 RELAMPING – CFL ONLY

STEP 1

Turn off power before replacing the lamps.

STEP 2

Open the cover/fascia assembly (see FIG 1).

STEP 3

Gently pull the defective lamp out of the lamp holder.

STEP 4

Insert the base of the new lamp into the lamp holder until the lamp fits firmly.

STEP 5

Close the cover/fascia assembly (see FIG 2).

LED LAMPING – NO SERVICE REQUIRED.