


- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

Installation instructions:

Fixture shipped partially assembled


1. Decide power cord length adding 5" extra for lamp/ballast connection inside the canopy
2. Feed power cord through canopy - see FIG#3
3. Attach mounting bracket to J-box
4. Insert aircraft cable into glider
5. Attach remote ballast disc to the mounting bracket (2 x side screws supplied)
6. Make appropriate wires connections to J-box (by others) including the grounding on the remote ballast disc
7. Lift canopy and snap on remote ballast disc (using 2 x magnets supplied)
8. Adjust aircraft cable - see FIG#2

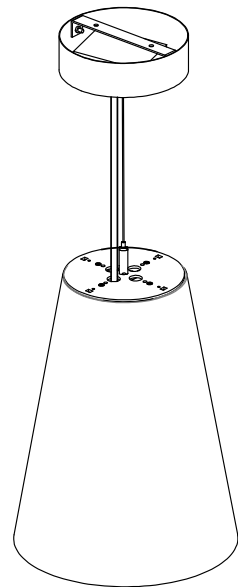

MAIN VIEW

Disc /Ring Options: See Fig.3


1. Attach 3 cradle bars to the top disc (screws supplied)
2. Insert disc / ring
3. Attach the fourth cradle bar

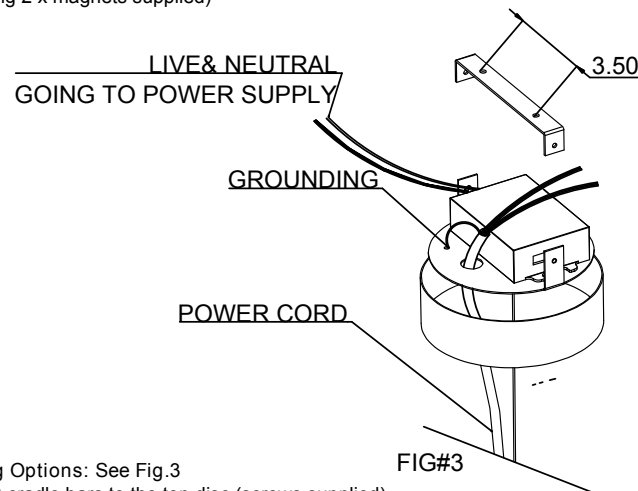


CRADLE BAR(X4)

DISC or RING

FIG#3



FIG#4

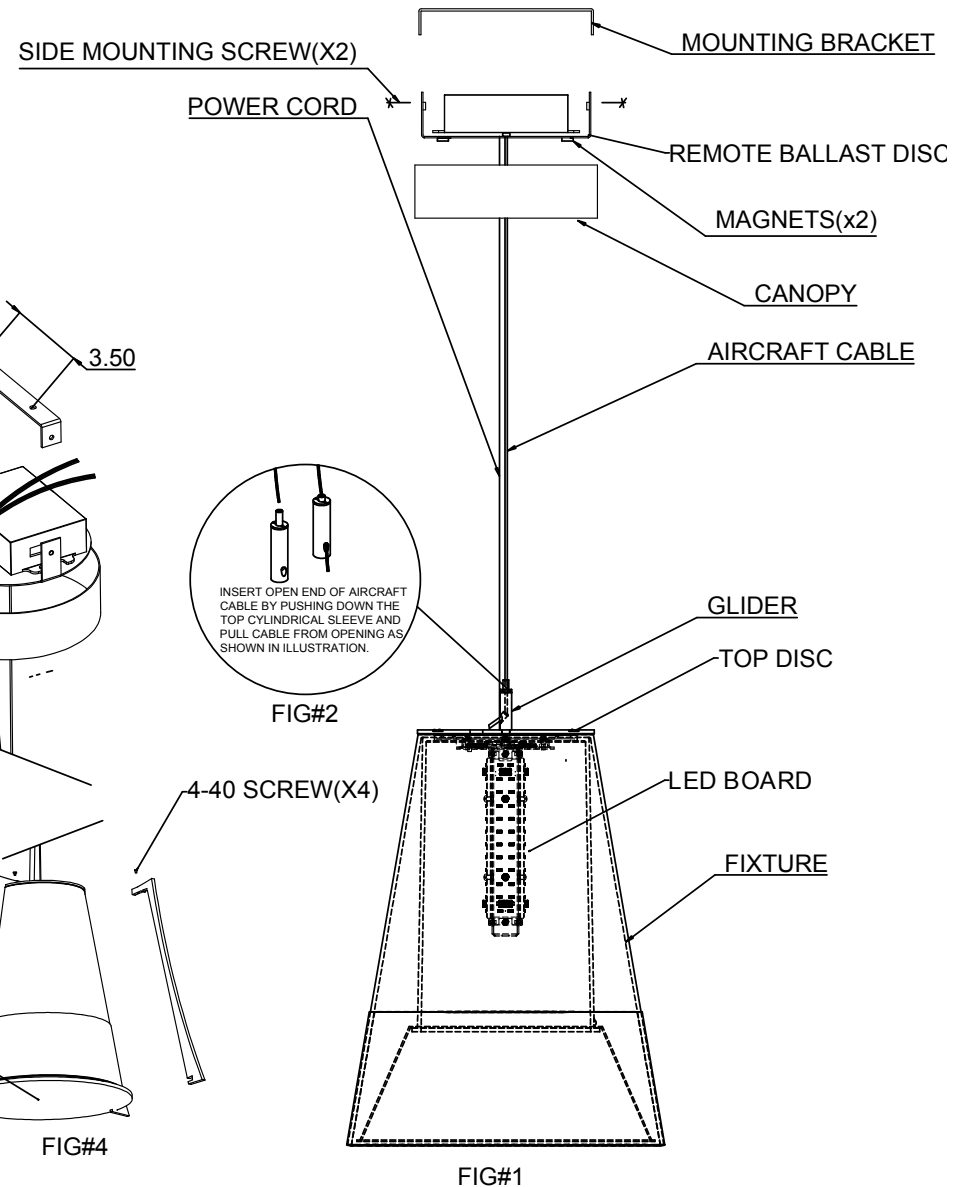

FIG#1

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS