

## FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

1 - MOUNT CANOPY TO JUNCTION BOX ENSURING THAT THE AIRCRAFT CABLES ARE PRE-INSTALLED IN THE CANOPY

2 - ENSURE THAT THE AIRCRAFT CABLES ARE PASSING THROUGH THE CANOPY PLATE, LIFT FIXTURE INTO POSITION AND SUSPEND USING THE AIRCRAFT CABLES (SEE FIG 2)

3 - LEVEL FIXTURE USING AIRCRAFT CABLES AND TRIM EXCESS - ENSURE TO LEAVE AT LEAST 1" PROTRUDING FROM THE EXIT ON THE CABLE GLIDER

4 - MAKE ALL NECESSARY ELECTRICAL CONNECTIONS, LIFT CANOPY COVER INTO POSITION AND SECURE WITH FINIAL

5 - IF EQUIPPED MOUNT THE DECORATIVE DISC OR RING BY PLACING OVER THE THREE STUDS AND SECURING WITH SMALL FINIALS

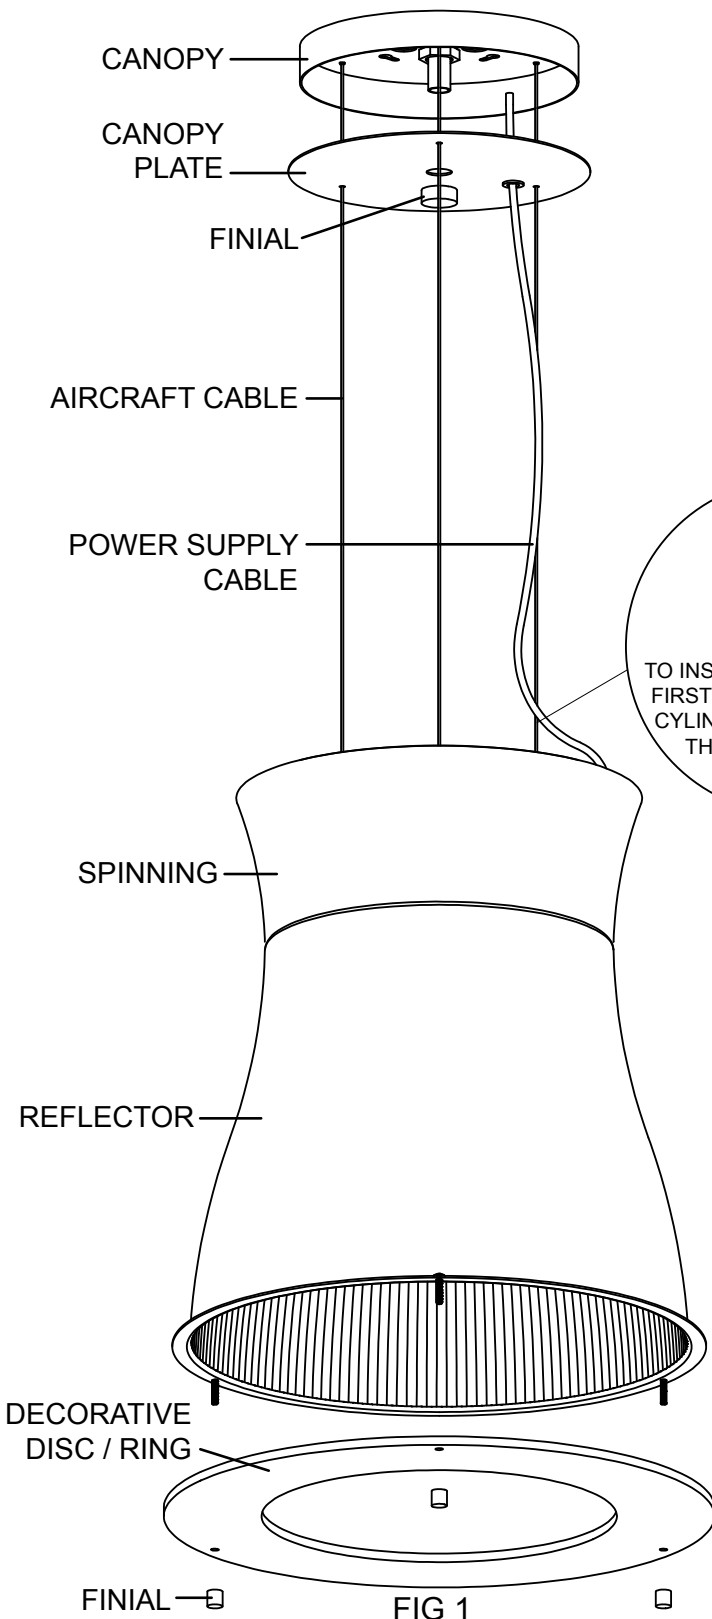


FIG 1




FIG 2

