

1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.

INSTALLATION STEPS:

1. Mount canopy to junction box using screws (not included) according to the structure of the ceiling, ensuring that the aircraft cables are pre-installed in the canopy.
2. Ensure that the aircraft cables are passing through the gear tray and canopy plate, lift fixture into position and suspend using the aircraft cables (Fig. 1).
3. Attach the gear tray to the canopy using wing nuts (2x) and make all necessary electrical connections.
4. Level fixture using aircraft cables and trim excess, ensure to leave at least 1" protruding from the exit on the cable glider (Fig. 1).
5. Mount the internal reflector by twisting into place (Fig. 2).
6. Lift reflector into place and twist onto keyholes, tighten screws (3x) to secure (Fig. 2)
7. If equipped, mount the decorative disc or ring using 3 screws, spacers and finials.

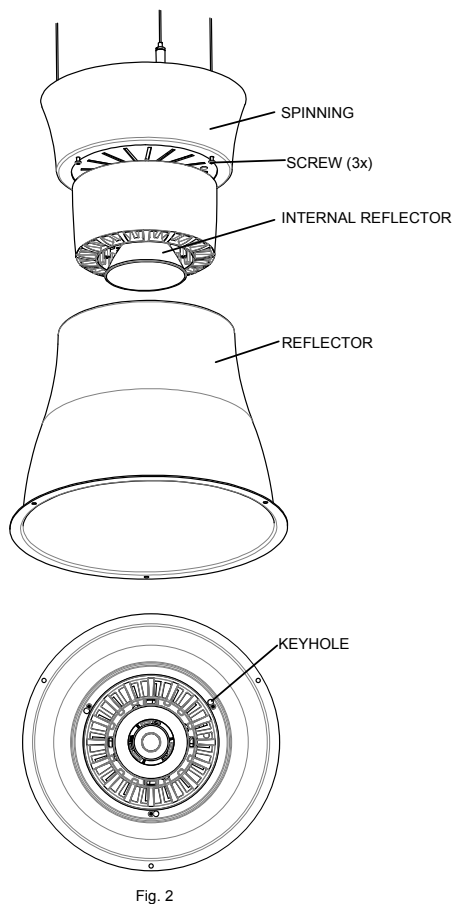


Fig. 2

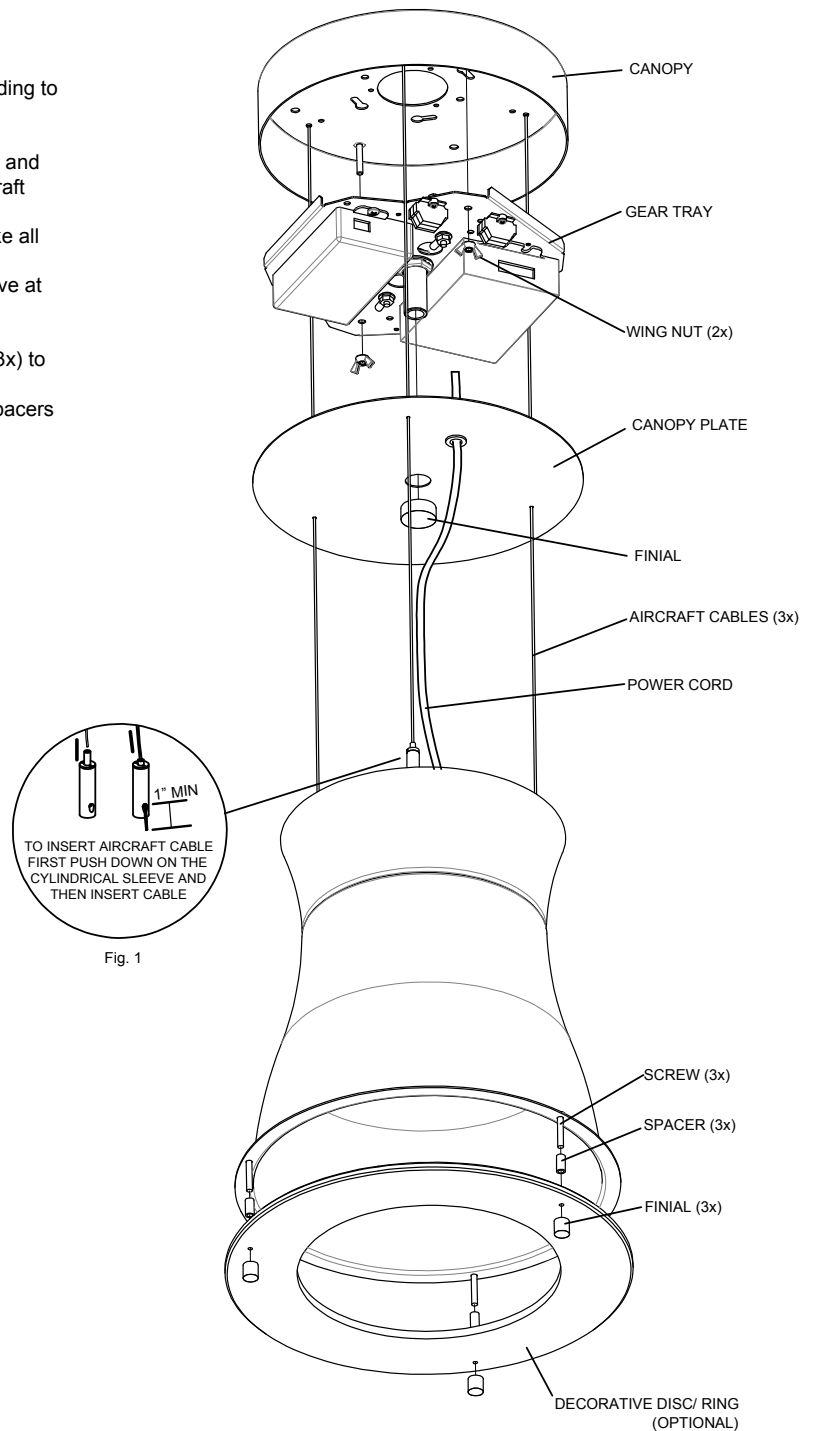


Fig. 1

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS