


1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.

INSTALLATION STEPS:

1. Fixture shipped completely assembled.
2. Loosen the set screw in the cable clamp and lower the canopy plate.
3. Reattach the canopy from the gear tray by removing lock nuts (2x).
4. Mount the canopy to the junction box using screws (not included) according to the structure of the ceiling.
5. Attach the gear tray to the canopy using lock nuts (2x).
6. Adjust fixture to desired height and trim excess, ensure to leave at least 1" protruding from the exit on the cable glider (Fig. 1).
7. Trim the power cord (if necessary) and make all electrical connections.
6. Raise the canopy plate into position and secure with the cable clamp and set screw.

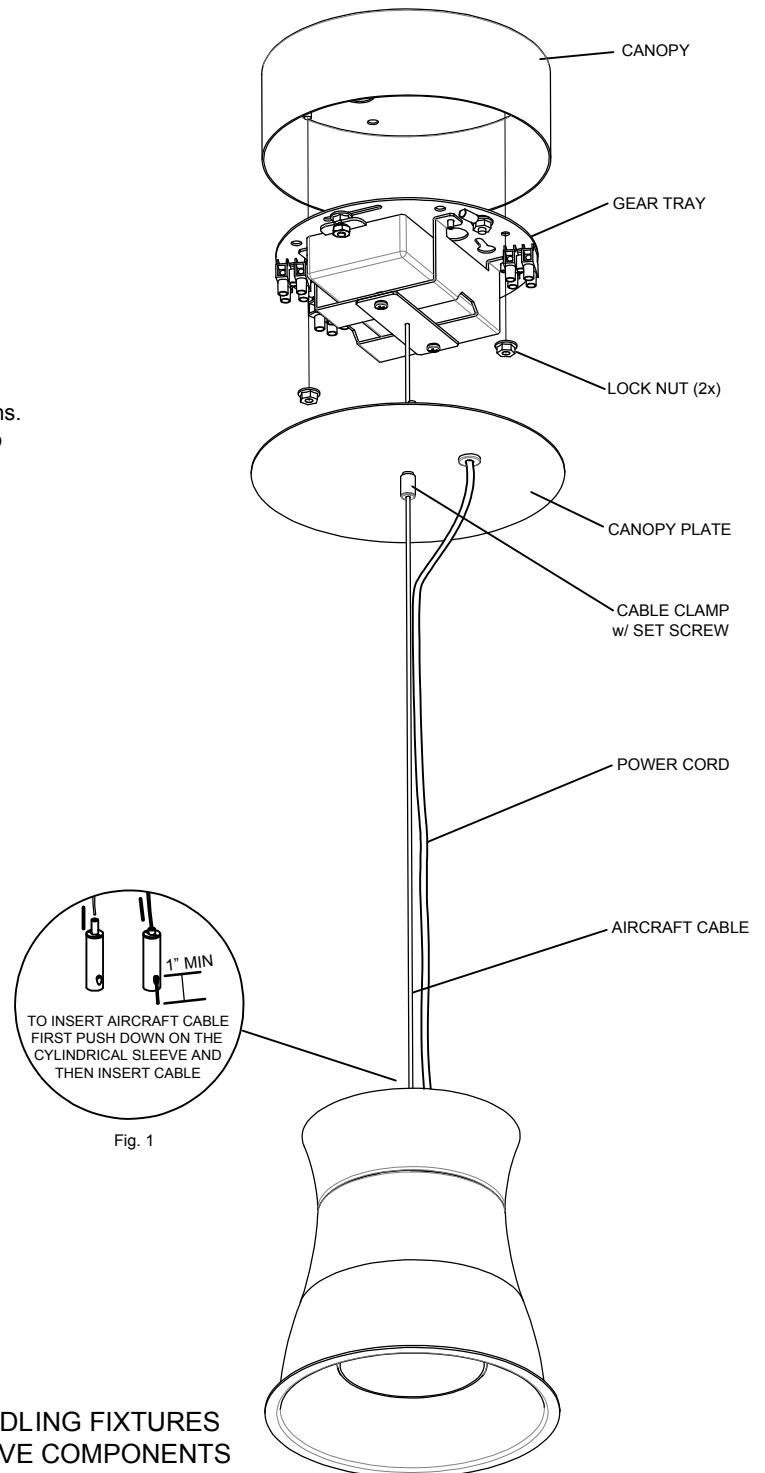

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: EXY PD MEDIUM: 515510, 515511