

¥ WEB PIN™ 146

PAGE 1 OF 2

FIXTURE COMES PARTIALLY ASSEMBLED




PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR.


## NOTE THAT THE FIXTURE IS SHIPPED AS FOLLOWS:

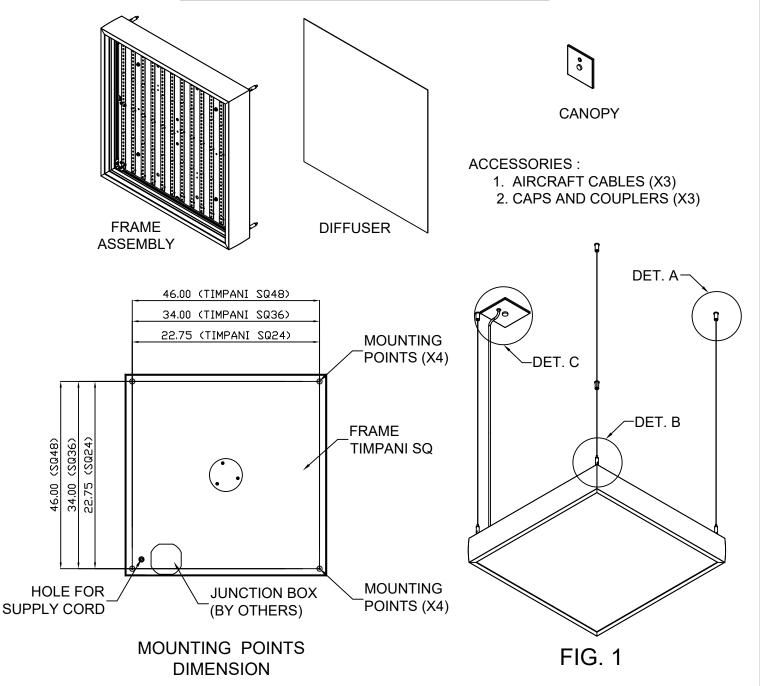


## TIMPANI SQ PD™


¥ WEB PIN™ 146

PAGE 2 OF 2





DET. B



DET. C

## **INSTALLATION INSTRUCTIONS:**

- 1. Prep the aircraft cables by separating the cap from the coupler. Mount the couplers to the ceiling by using the appropriate fastener (not provided and according to the structure of the ceiling). DET. A
- 2. Pass the aircraft cables through the cap then fasten the cap to the coupler.
- 3. Put the diffuser inside the frame by slightly bending it and release once all edges are inside. Lift the fixture and attach the loose end of the aircraft cables to the cable gliders. DET. B / FIG. 2
- 4. Pass the supply cord into the canopy and make all the necessary connections to the main power supply (please refer to the provided Wiring Diagram). Attach the canopy to the junction box (by others). DET. C
- 5. Adjust and level the fixture according to desired height and angle by using the cable gliders.

NOTE: USE COTTON GLOVES WHEN HANDLING THE DIFFUSER.

