



- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "S5" MOUNTING


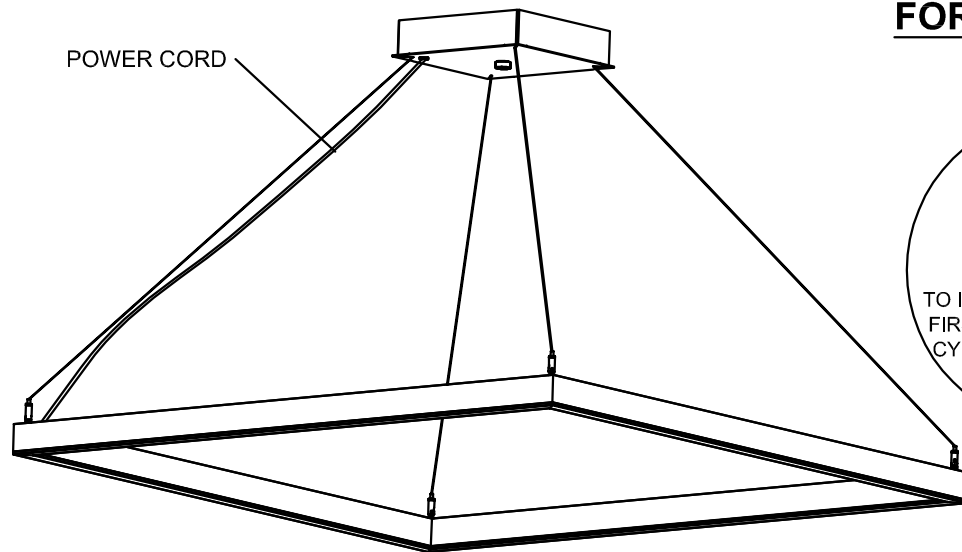


Fig. 1

1. Place the fixture on a flat surface.
2. Lift the ceiling plate with aircraft cables, make the wiring connections inside the junction box, and attach the ceiling plate to the junction box (standard junction box with 3.5" in between the screws).
3. Orient the gliders to the center of the fixture. If necessary turn them once counterclockwise to align them.
4. Lift the fixture and attach the loose ends of the Aircraft Cables to the cable gliders -see Fig.2

Important:

The angled aircraft cables attached to the fixture must protrude 1 inch only beyond the glider.

5. Adjust height of the fixture and pass the power cord through the canopy's hole. secure the power cord with the with cables ties, and trim or coil inside the canopy the excess power cords.
6. Secure the power cord with the with cables ties, and trim or coil inside the canopy the excess power cords.
7. Make all necessary electrical connections, lift canopy cover into position and secure it with the finial.

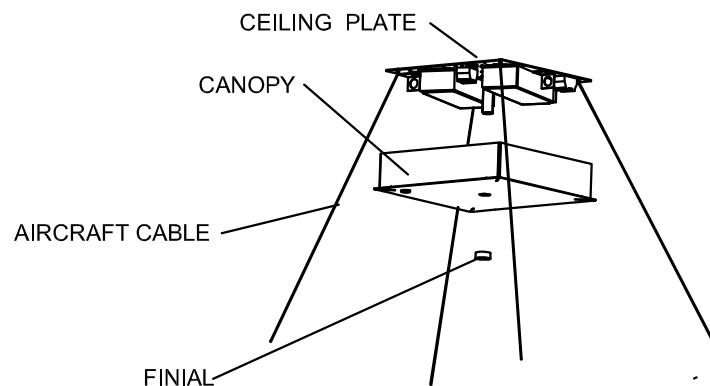


Fig. 2

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: MICRO SQ DE/ MICRO SQ II PENDANT