

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

Fixture comes partially assembled

**⚠ PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION**

**⚠ NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR**

#### INSTALLATION STEPS:

1. Mount the couplers to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling (Fig. 1 and Table 1).
- PLEASE ENSURE THAT THE FASTENERS ARE INSTALLED ON THE STUD/JOIST OR ANY SUPPORTING STRUCTURE OF THE CEILING. THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY FROM AN OUTLET BOX.**
2. Pass the aircraft cables through the caps (Fig. 2).
3. Fasten the caps to the couplers.
4. Lift the fixture and attach the loose ends of the 4 or 5 aircraft cables to the cable gliders (Fig. 3).
5. Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple / finial assembly provided (Fig. 4).
6. Level the fixture using the cable gliders.
7. Insert diffusers textured side down by slightly twisting and lifting into place (Fig. 4).

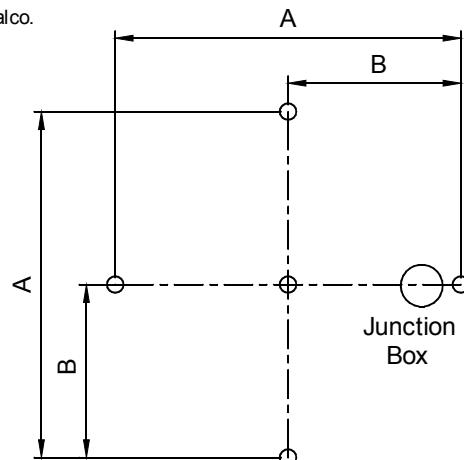


Fig. 1

Table 1

	A in	B in	SUSPENSION
MACRO CROSS 30	29.1	-	4
MACRO CROSS 43	42.1	-	4
MACRO CROSS 57	56.1	28.05	5
MACRO CROSS 71	70.1	35.05	5
MACRO CROSS 85	84.1	42.05	5

