

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

### Installation Instructions:

1. Remove both end caps by pulling it out. (FIG. 1)
2. Unfasten the dust cover screws and remove the dust covers.
3. Remove the front diffuser by sliding it out from the main fixture. (FIG. 2)
4. Place the fixture over the wall and make all the necessary connections to the power supply. Avoid touching the yellow part of the LED board or damage may occur.
5. Secure the fixture to the wall by using the appropriate mounting screw (not included). (FIG. 3)
6. Re-attach the bottom dust cover. Slide back the front diffuser by inserting its foot on the slot of the bracket for diffuser and dust cover.
7. Screw back the top dust cover and attach the end caps by inserting the springs on the allotted holes. Make sure that the end caps are properly inserted. (FIG. 5)

#### \*For EMERGENCY option:

- a. Select the appropriate settings by referring to the provided manual of the EM-LED driver (i.e. Battery ON/OFF, Emergency Power Selection Switch)
- b. Re-attach the bottom dust cover (with Test Switch/LED Indicator) and slide back the front diffuser.
- c. Insert the clear velvet film into the front diffuser, make sure that the film is sitting on the foot of the diffuser. (FIG. 4)

### Important Note:

**To avoid damaging the LEDs, do not Touch the LED boards while installing and/or servicing the fixture.**

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

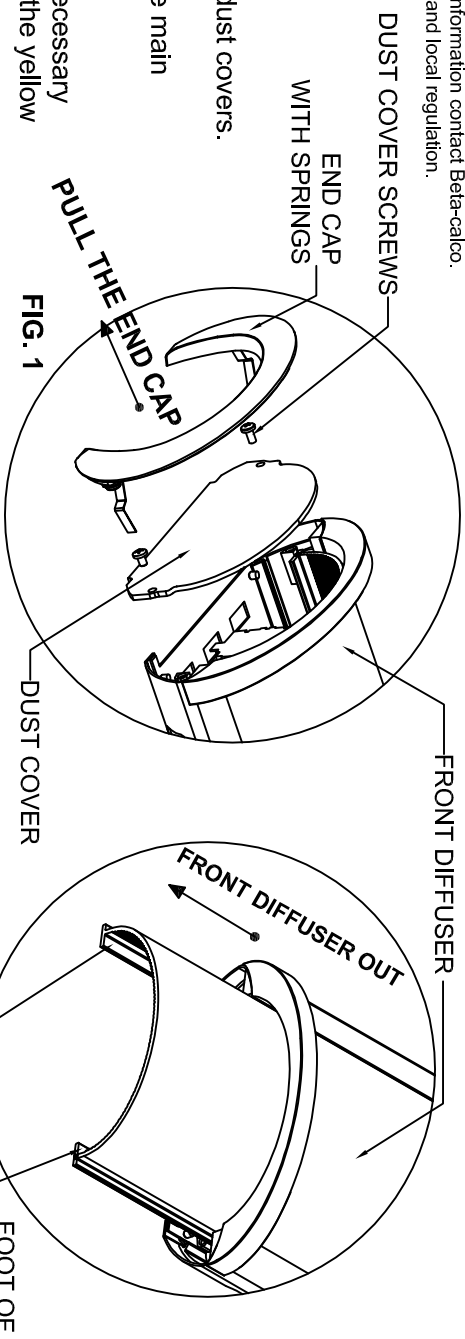


FIG. 1

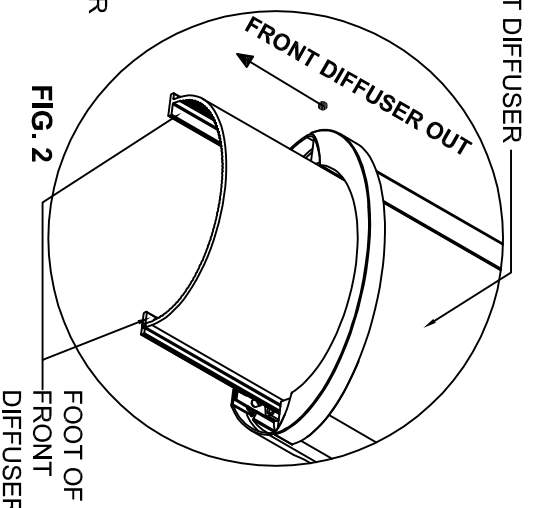


FIG. 2

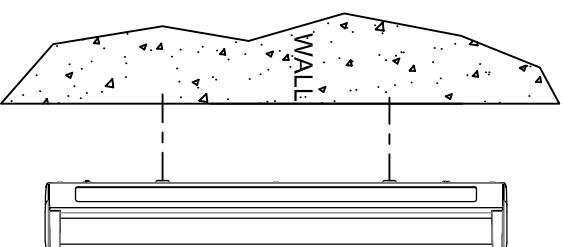


FIG. 3

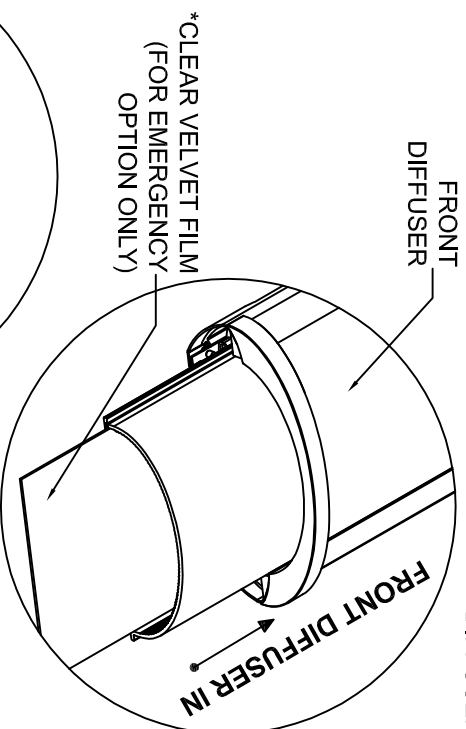


FIG. 4

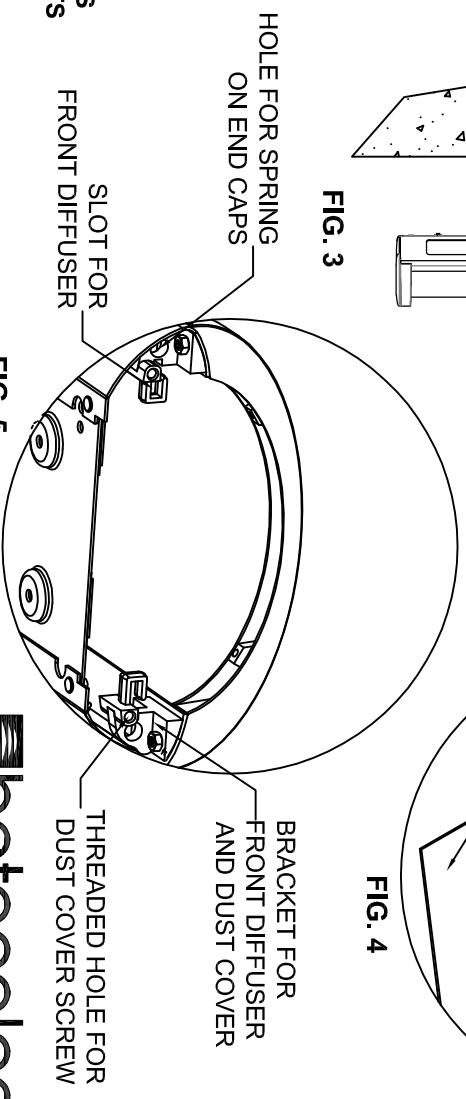


FIG. 5