

1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.

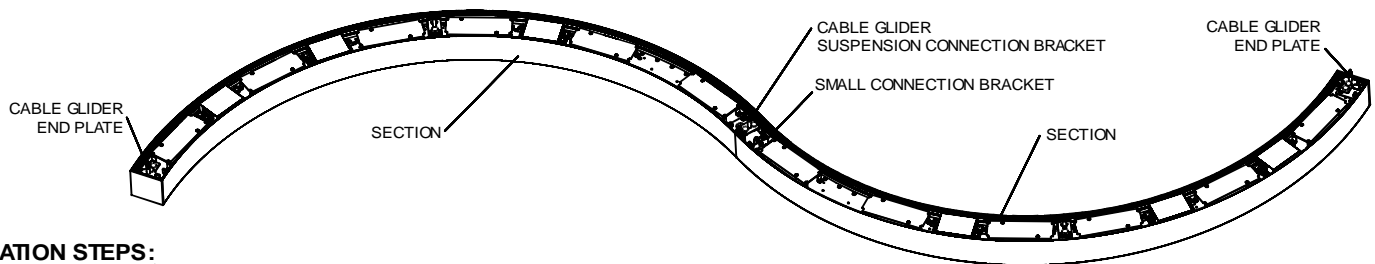


Fig. 1

INSTALLATION STEPS:

1. Lay down entire fixture with a desired shape on the floor, remove top covers, and insert suspension connection brackets and end plates but not secure them. Take a measurement between cable gliders (Fig 1).
2. Mount the couplers to the ceiling based on the measurement from step 1 using appropriate fasteners (not included) according to the structure of the ceiling (Fig. 2).
PLEASE ENSURE THAT THE FASTENERS ARE INSTALLED ON THE STUD/JOIST OR ANY SUPPORTING STRUCTURE OF THE CEILING. THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY FROM AN OUTLET BOX.
3. Pass the aircraft cables through the caps and fasten the caps to the couplers.
4. Suspend fixture to the ceiling section by section. Start with the first section. Install the end plate using supplied 1/4-20 nuts and lock washers (Fig. 3). Install the suspension connection bracket on the other end. Please use separate "RING-SQUIGGLE-MACRO - CONNECTION INSTRUCTIONS" for the connection brackets installation and connecting sections together. (Fig. 4).
5. Lift the section and attach the loose ends of the three aircraft cables to the cable gliders (Fig. 5).
6. Level the section using the cable gliders.
7. Insert diffusers textured side down by sliding into the end of the section (ensure diffuser overlaps are in the correct orientation). It is important to install diffusers before connecting section to each other (Fig. 6).
8. Assemble the next section. Install the small connection bracket on one end and suspension connection bracket on the other end. Please use separate "RING-SQUIGGLE-MACRO - CONNECTION INSTRUCTIONS" for the connection brackets installation and connecting sections together.
9. Lift the section and attach the loose ends of two aircraft cables to the cable gliders. Level the section using the cable gliders.
10. Fasten sections together using the alignment plates and the connection brackets. Please use separate "RING-SQUIGGLE-MACRO - CONNECTION INSTRUCTIONS" for the connection brackets installation and connecting sections together (Fig. 7).
11. Insert diffusers textured side down by sliding into the end of the section (ensure diffuser overlaps are in the correct orientation) (Fig.1). It is important to install diffusers before connecting section to each other.
12. Repeat steps 8 to 11 for other sections except the last one.




Fig. 2

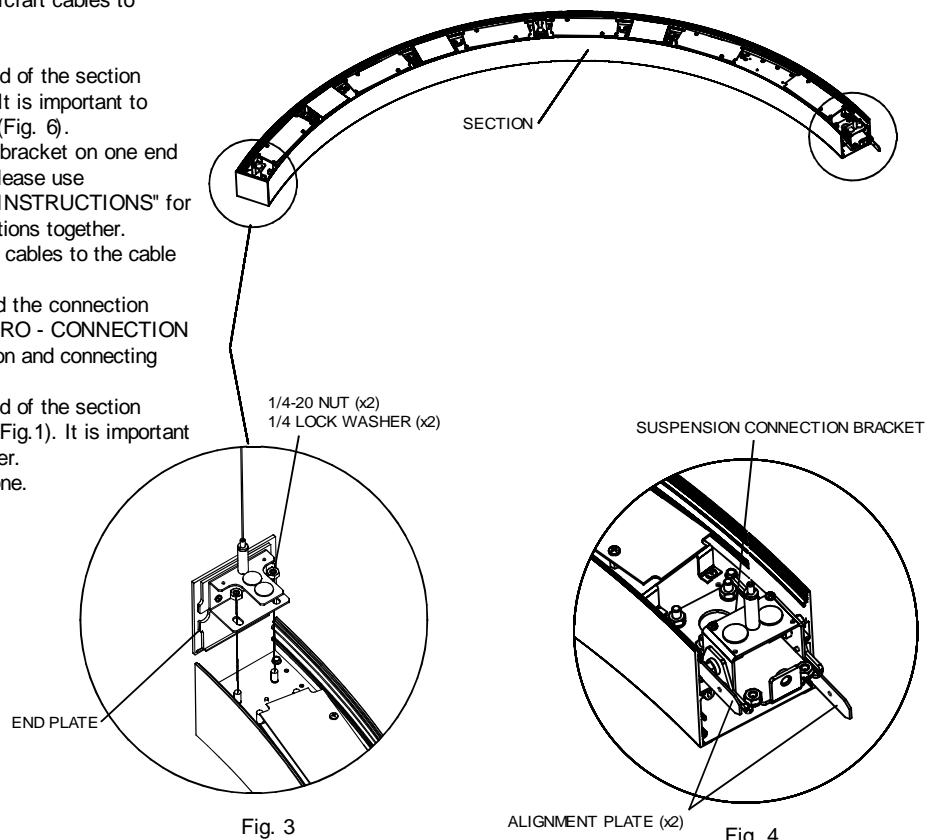


Fig. 3

Fig. 4

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: PENDANT