

1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.

### INSTALLATION STEPS:

1. Insert 3x diffusers into the segment by sliding into the end of the segment (ensure diffuser overlaps are in the correct orientation) (Fig.1).
2. Slide the alignment brackets into position so they span the joint between segments (x4 / joint, 2 at top, 2 at bottom), they may need to be carefully tapped with a hammer (Fig. 2) and fasten segments together using connector bracket with supplied 1/4-20 nuts (Fig. 1, 2).
3. Make wiring connections between segment.
4. Connect the hub to the fixture by factening 6 aircraft cables to the suspension brackets using supplied 1/4-20 screws and nuts (Fig. 3).
5. Connect power cords to the fixture and re-install top covers.
6. Mount canopy backplate over junction box (canopy must be anchored directly to ceiling) (Fig. 4).
7. Lift the fixture and insert the long aircraft cables into the cable gliders on the hub (Fig. 5).
8. Ensure that the aircraft cables and power cords are passing through the canopy and hub cover, and suspend the fixture by threading bolt on canopy backplate through the aircraft cable loops, secure with included nut. (Fig. 4).
9. Adjust height of the fixture and trim excess aircraft and power cables (ensure that the power cable is passing through the center of the hub and the canopy).
10. Make all necessary electrical connections, lift canopy cover into position and secure with 3x screws.

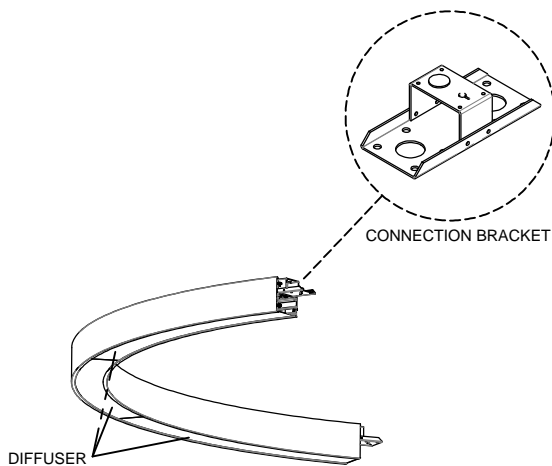
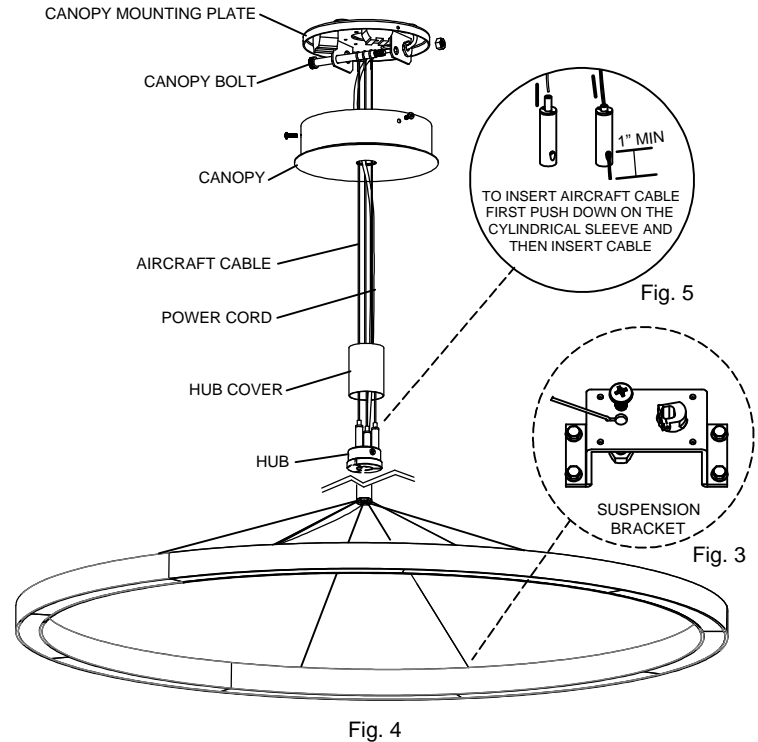


Fig. 1

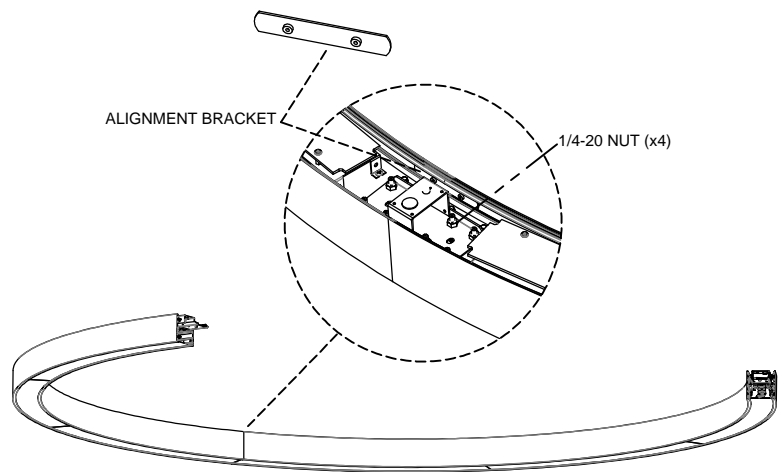


Fig. 2

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

*FIXTURE DESCRIPTION: RING 108: 950040, 950140, 950240...42, 950340, 950440, 950090, 950190, 950290...92, 950390, 950490*