


FIXTURE COMES PARTIALLY ASSEMBLED.



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION.



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR.

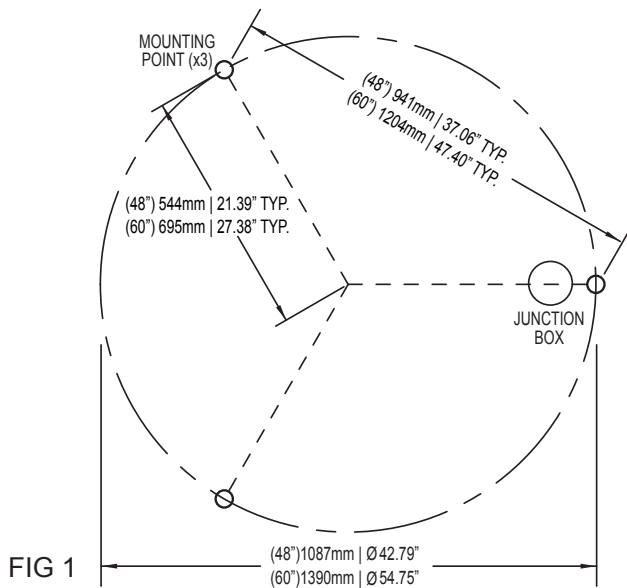

1. Mount the couplers to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling (see fig 1)
2. Pass the aircraft cables through the caps (see fig 3)
3. Fasten the caps to the couplers
4. Lift the fixture and attach the loose ends of the three aircraft cables to the cable gliders (see fig 2)
5. Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple / finial assembly provided
6. Level the fixture using the cable gliders
7. Insert diffusers by slightly twisting and lifting into place

Fittings are supplied with HFR dimming. Up and down light are not separately switched unless requested at time of order entry.

