




WEB PIN™ CODE: 219



- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

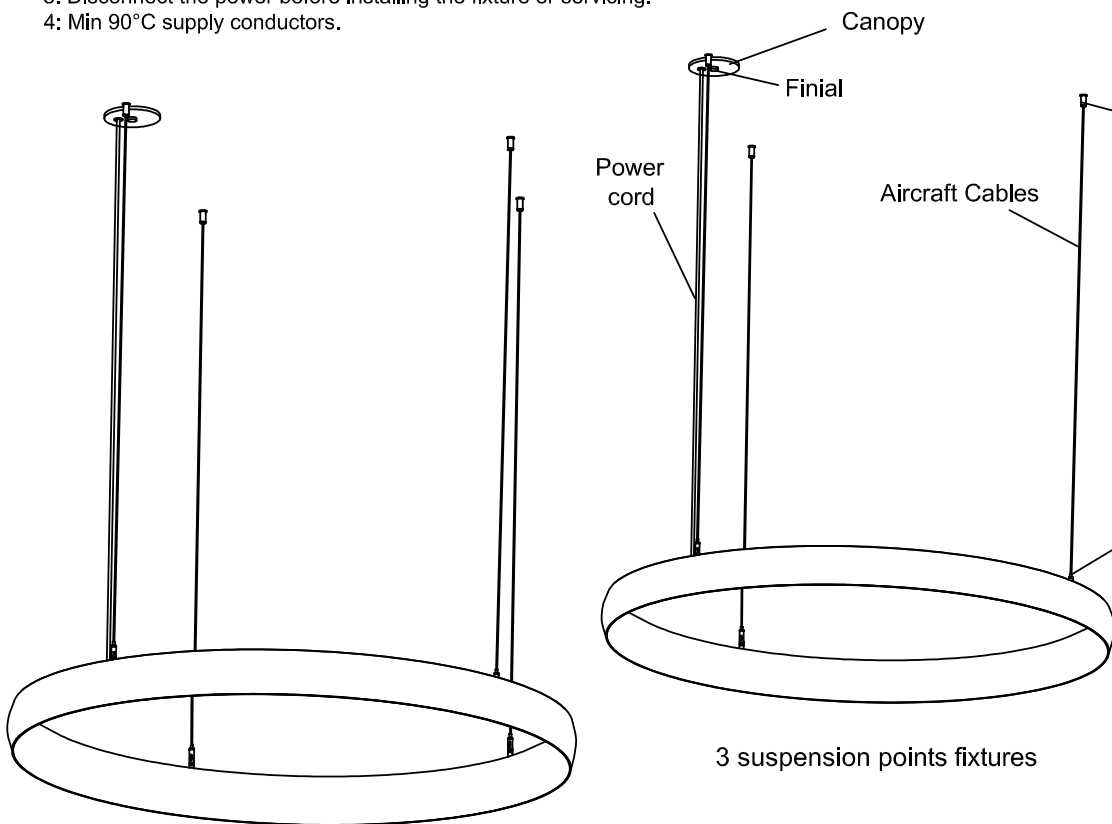

4 suspension points fixtures

3 suspension points fixtures

## INSTALLATION INSTRUCTIONS FOR TYPE "P1" MOUNTING



**IMPORTANT NOTE FOR  
FIXTURES WITH LED:  
- DO NOT TOUCH THE  
LED.**

1. Mount the couplers to the ceiling using appropriate fasteners -NOT INCLUDED- according to the structure of the ceiling - see Fig.1
2. Pass the aircraft cables through the caps - see Fig.1
3. Fasten the caps to the couplers
4. Lift the fixture and attach the loose ends of the Aircraft Cables to the cable gliders -see Fig.1
5. Pass the power cord through the off-center hole of the canopy.
6. Make all necessary wiring connections and attach the canopy to the junction box using the bracket/nipple/finial assembly provided.
7. Level the fixture using the cable gliders. To release the grip lock, press down on the tip of the mechanism. If desired, clip the excess aircraft cables after the fixture is level.

### Notes:

-The canopy is used to cover the branch circuit/junction box and is not used for suspension.

SIZE	SUSPENSION POINTS
914mm/36"	3
1219mm/48"	3
1524mm/60"	3
1829mm/72"	4
2134mm/84"	4

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES  
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: MIDI ARC RING PENDANT







WEB PIN™ CODE: 219

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

## INSTALLATION INSTRUCTIONS FOR TYPE "P1" MOUNTING

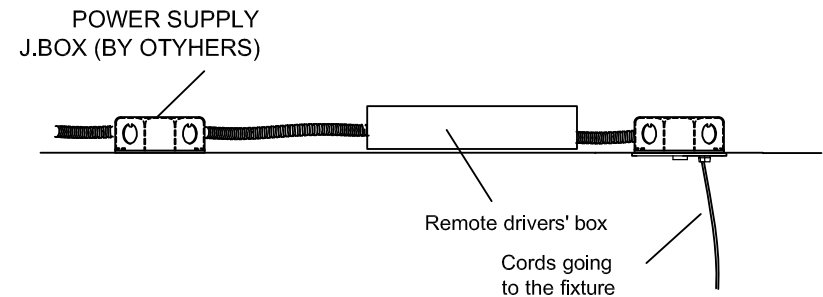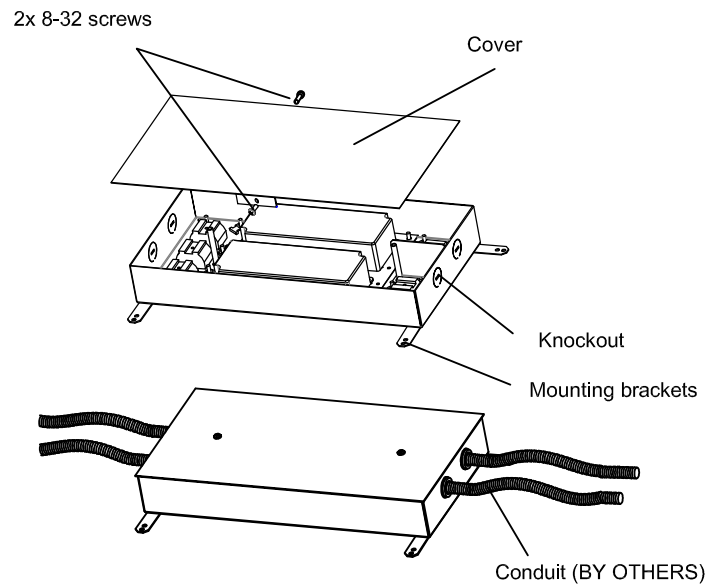

1. Remove the 2x 8-32 screws and the drivers' box cover.
2. Remove the necessary Knockouts.
3. Attach the conduits (not provided).
4. Make the wiring connections.
5. Install the cover using the previously removed screws.  
Use the mounting brackets to secure the box in place.

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES  
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**


*FIXTURE DESCRIPTION: MIDI ARC RING PENDANT*






WEB PIN™ CODE: 219

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

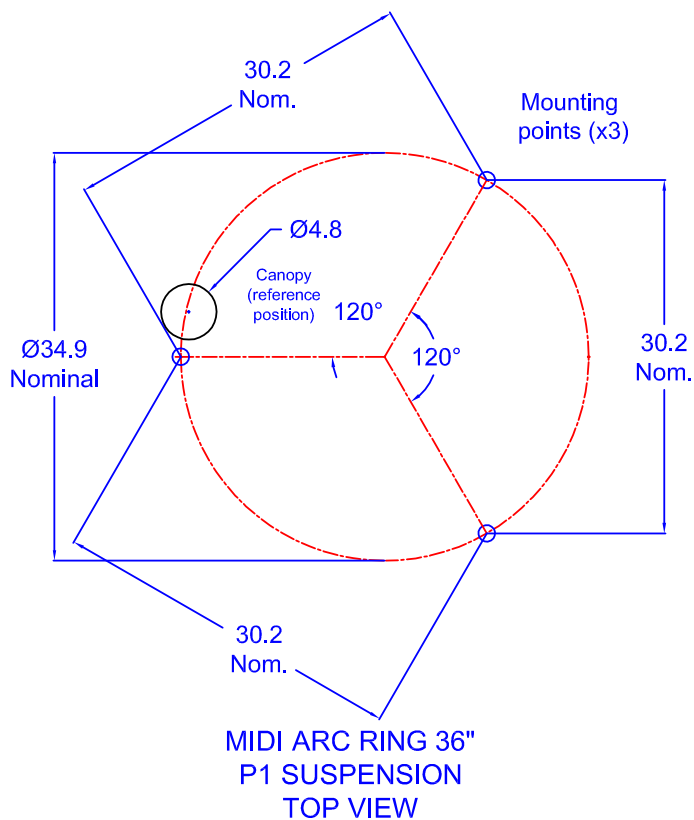

## MIDI ARC RING P1 SUSPENSION MOUNTING POINTS

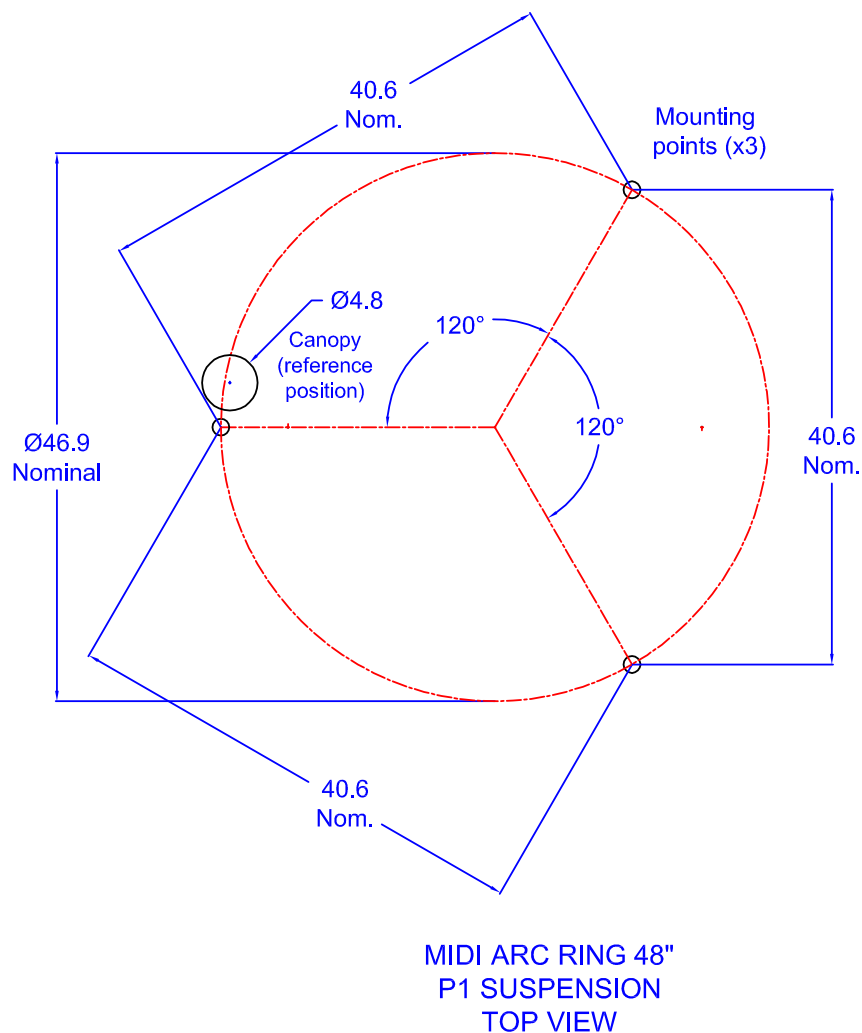

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: MIDI ARC RING PENDANT

NOTE:


- ALL THE DIMENSIONS ARE IN INCHES






WEB PIN™ CODE: 219

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

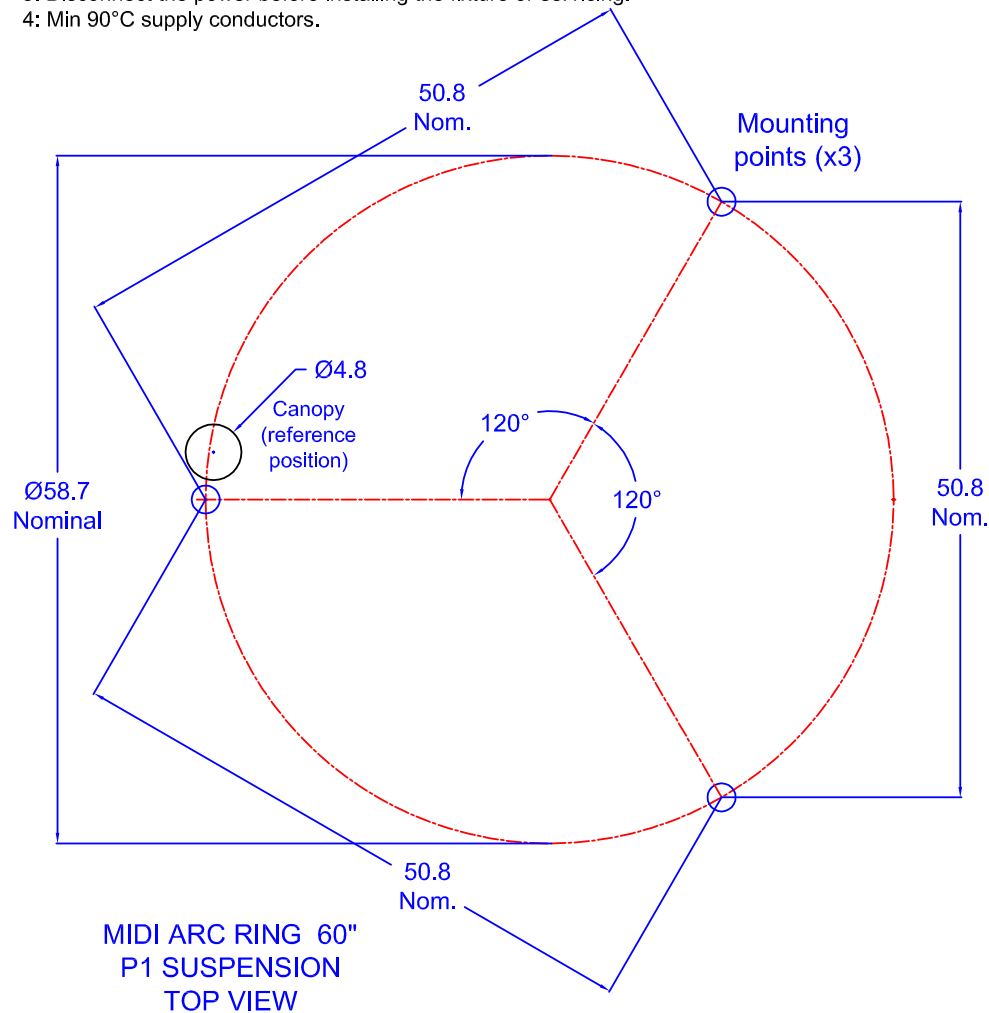

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

*FIXTURE DESCRIPTION: MIDI ARC RING PENDANT*

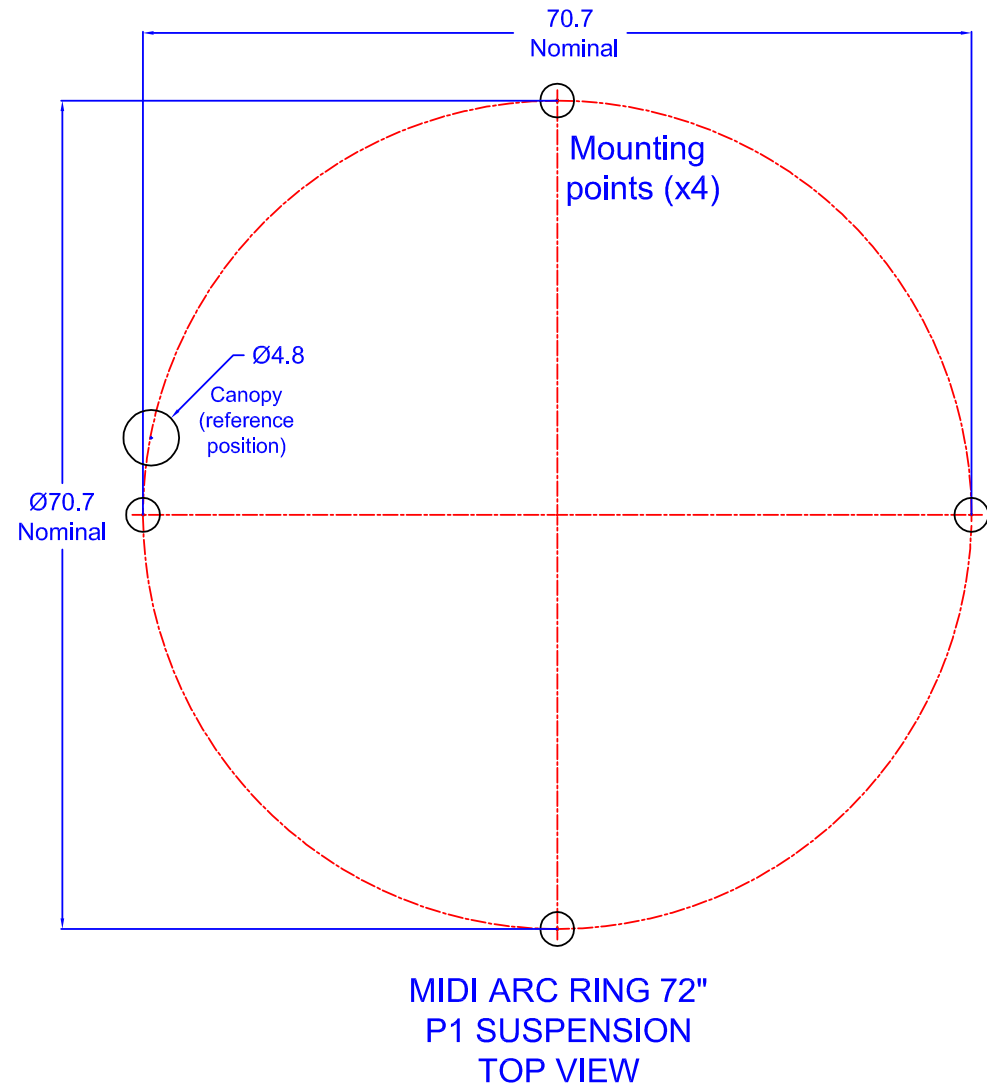

NOTE:

- ALL THE DIMENSIONS ARE IN INCHES






WEB PIN™ CODE: 219

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

## MIDI ARC RING 84" P1 SUSPENSION TOP VIEW

NOTE:  
- ALL THE DIMENSIONS ARE IN INCHES

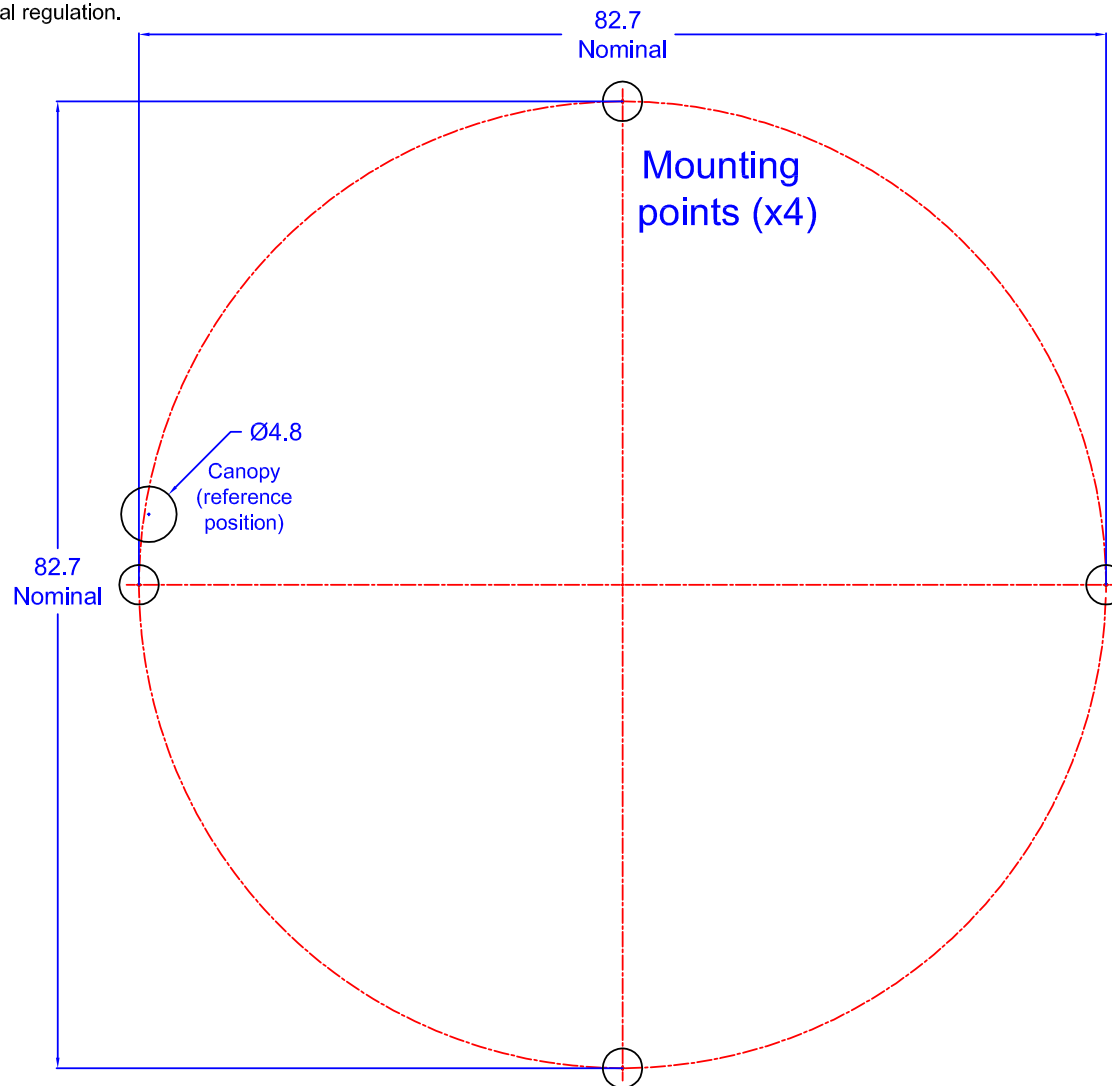

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES  
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

*FIXTURE DESCRIPTION: MIDI ARC RING PENDANT*

