



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

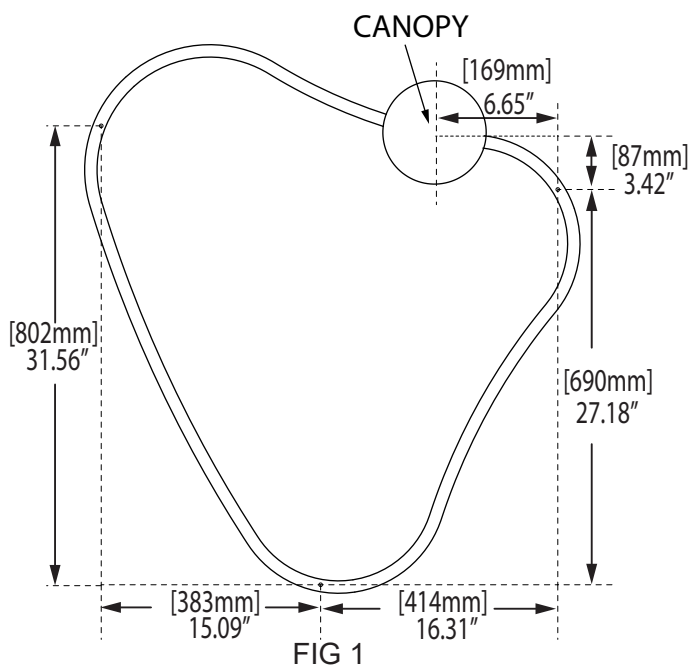


FIG 1

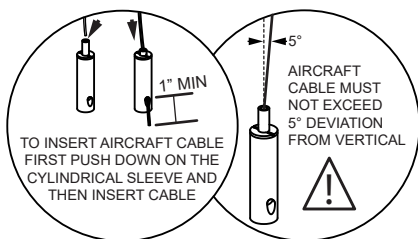


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

FASTENER
(NOT INCLUDED)
COUPLER
CAP
AIRCRAFT CABLE

FIG 2

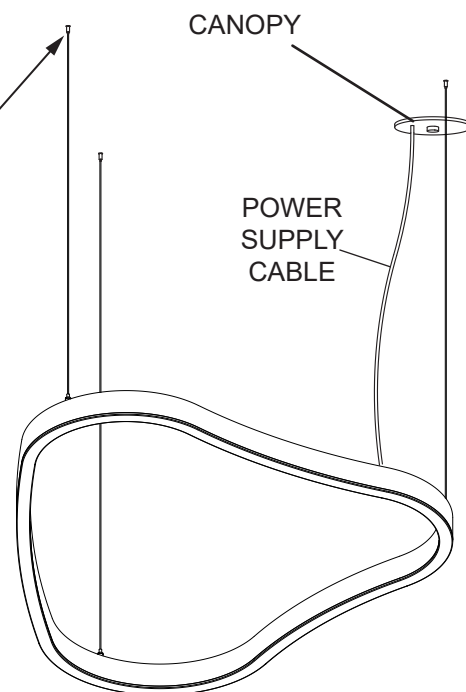


FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

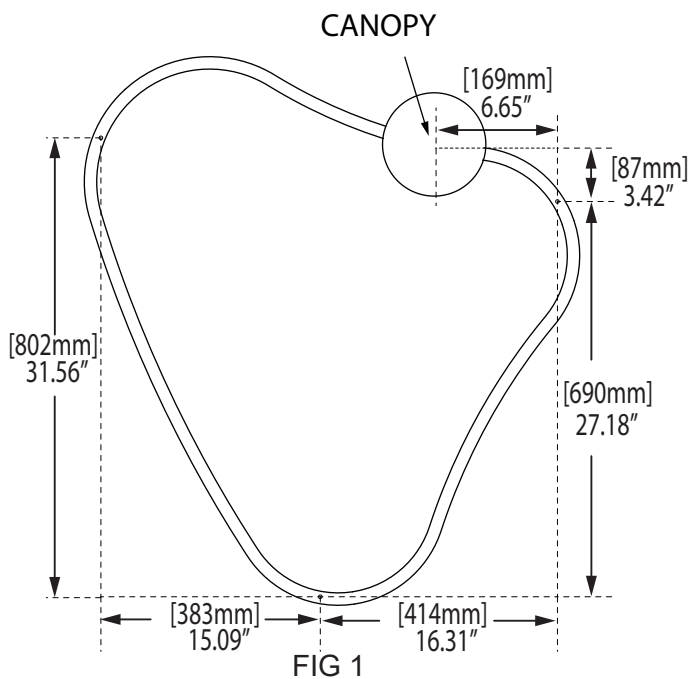


FIG 1




FIG 2

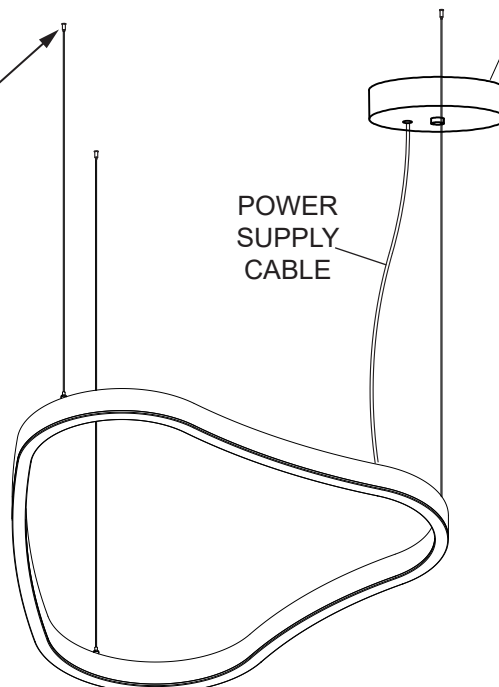


FIG 3

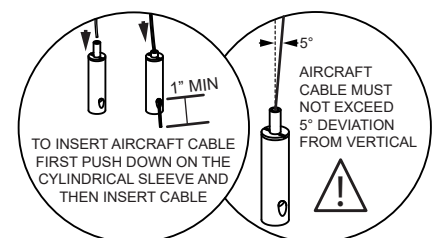



FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

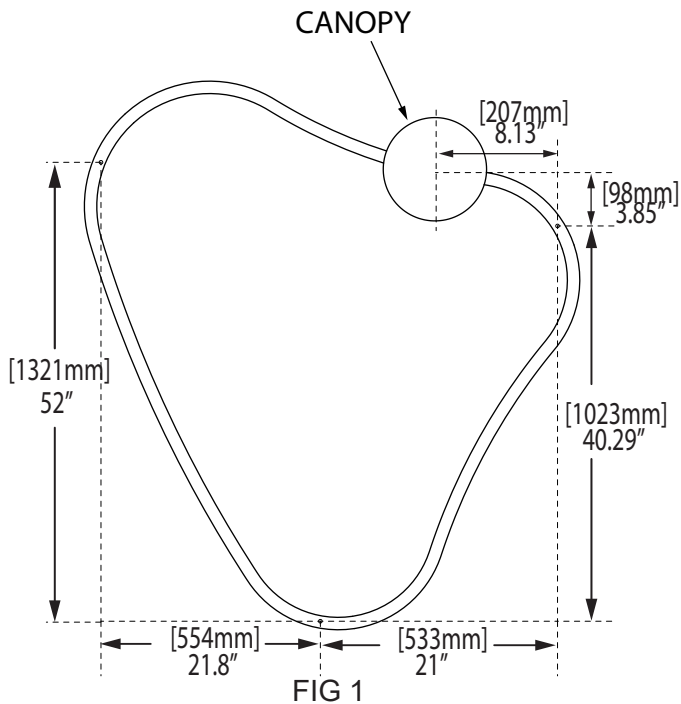


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

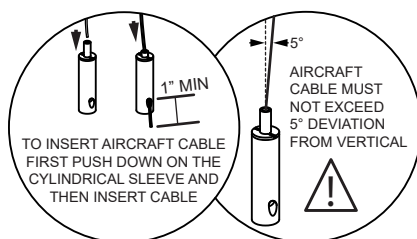


FIG 4

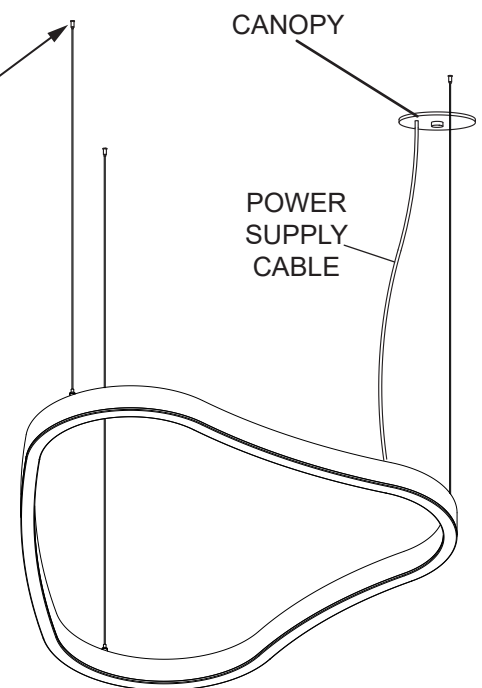


FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

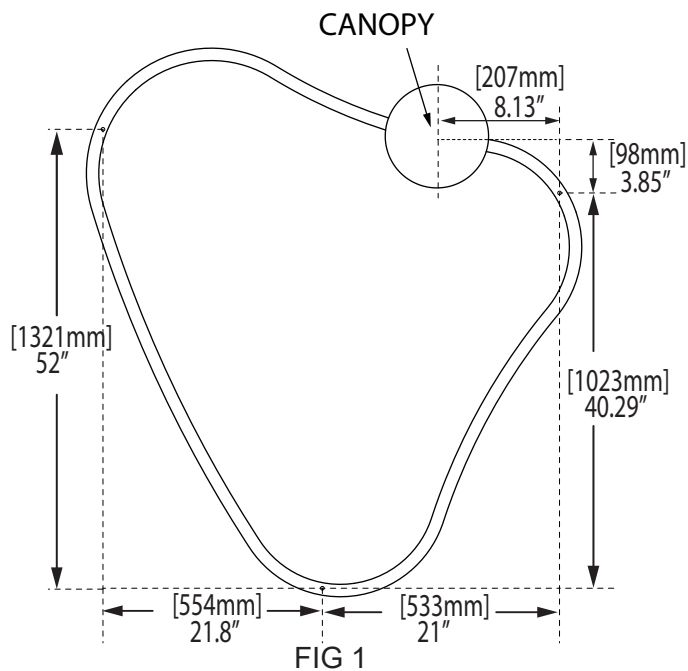


FIG 1




FIG 2

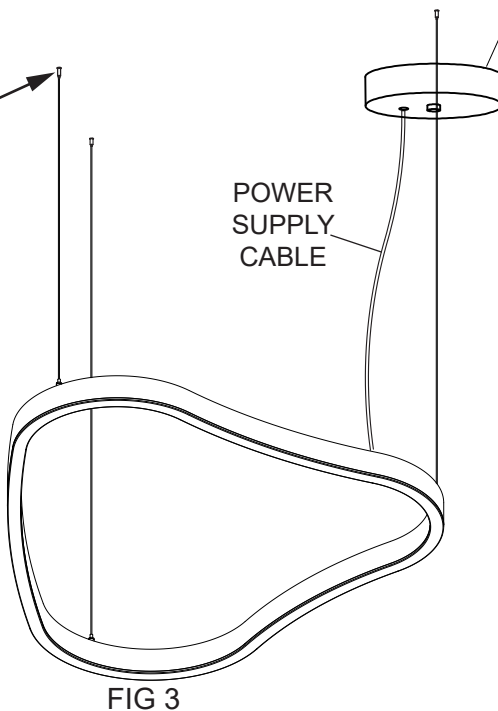


FIG 3

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED


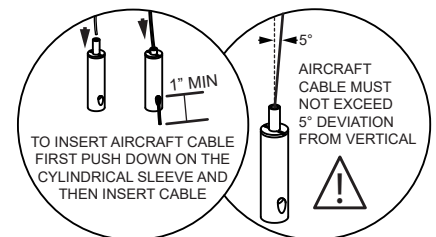


FIG 4




FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

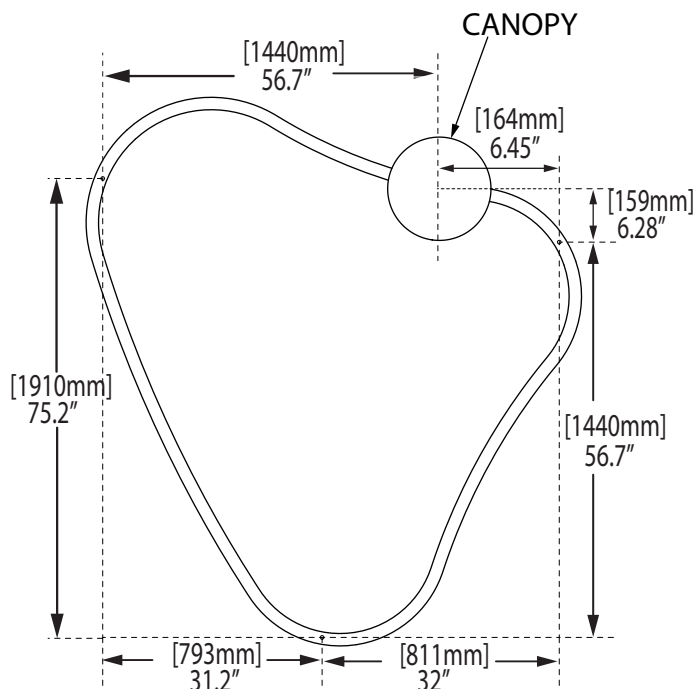

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

FIG 1




FIG 2

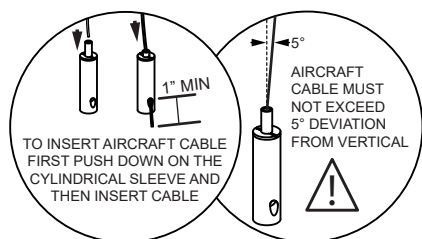


FIG 4

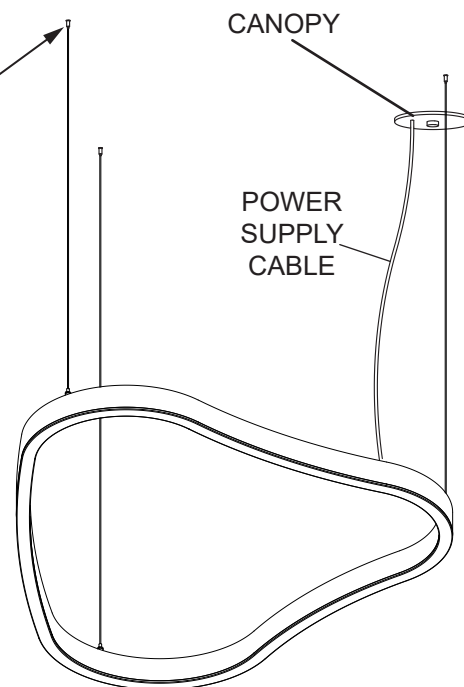


FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

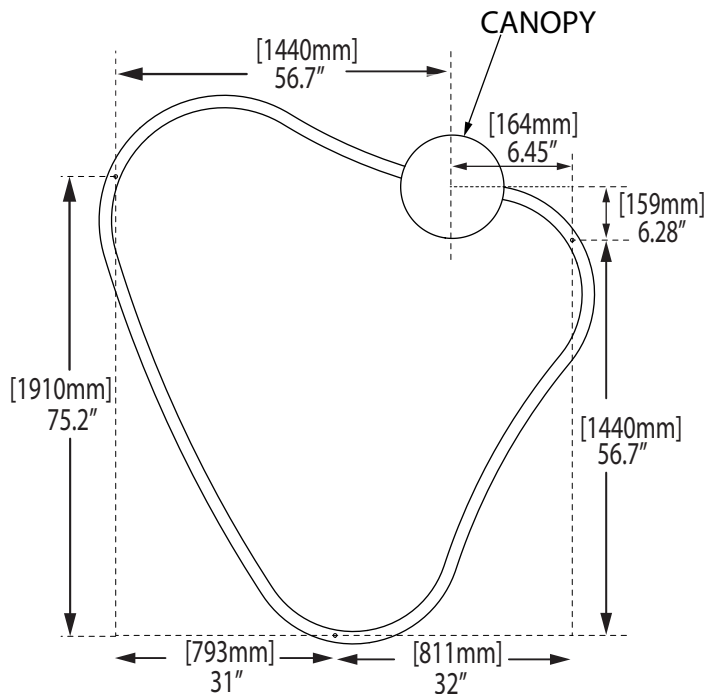


FIG 1




FIG 2

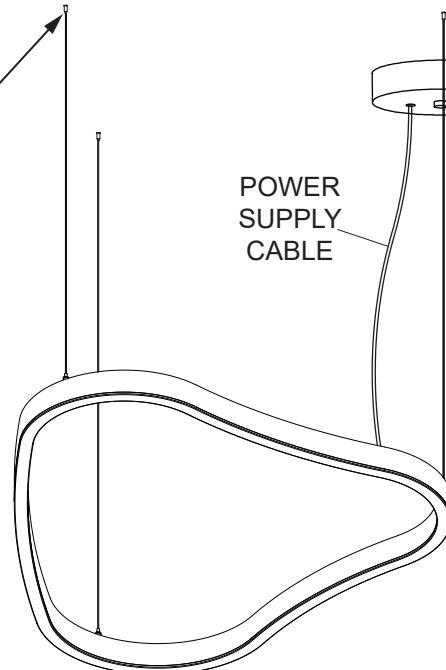


FIG 3

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED


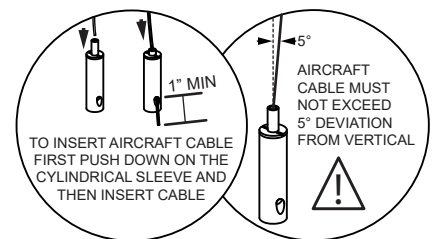


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

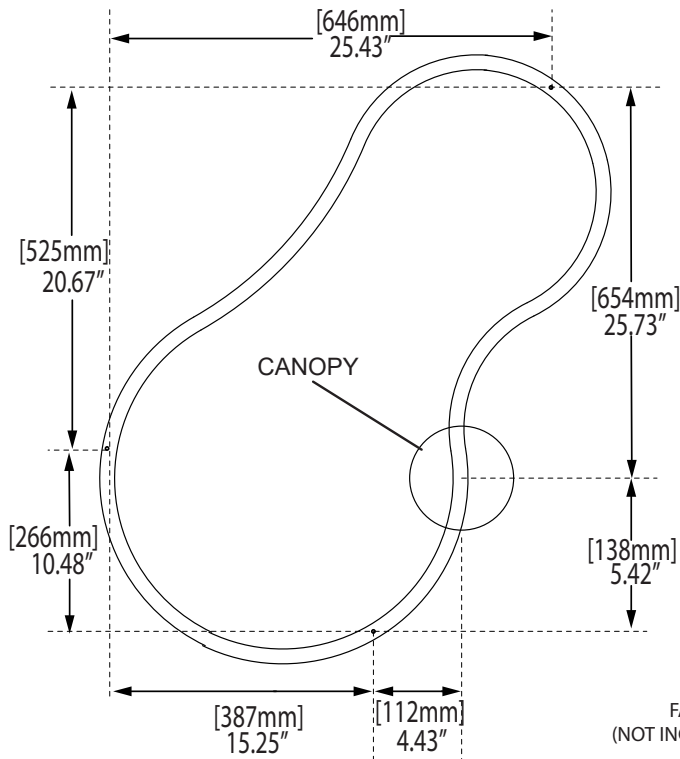


FIG 1

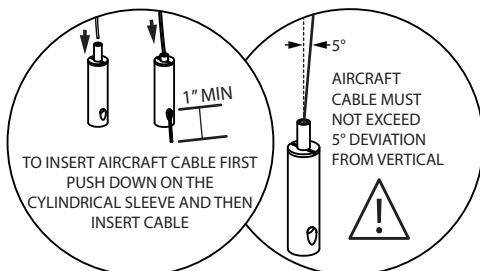


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

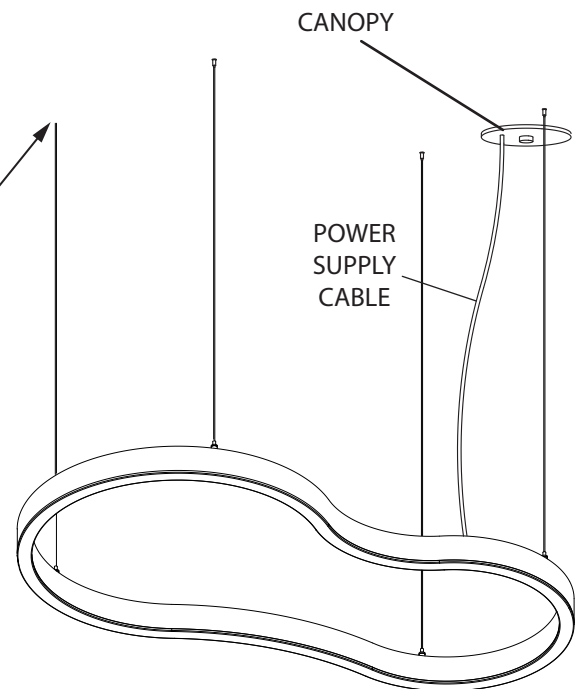


FIG 3

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

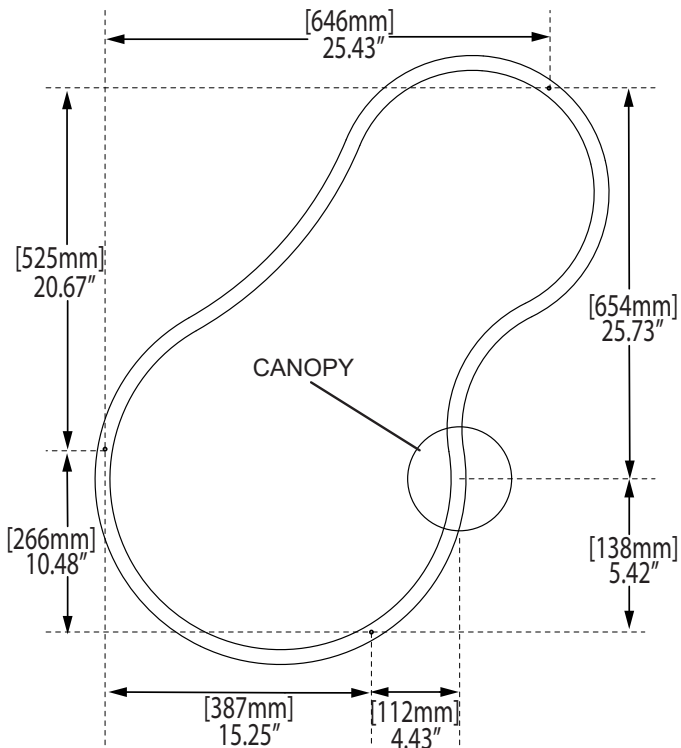


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

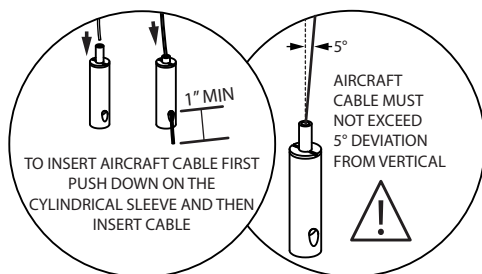


FIG 4

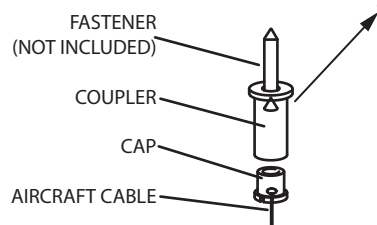


FIG 2

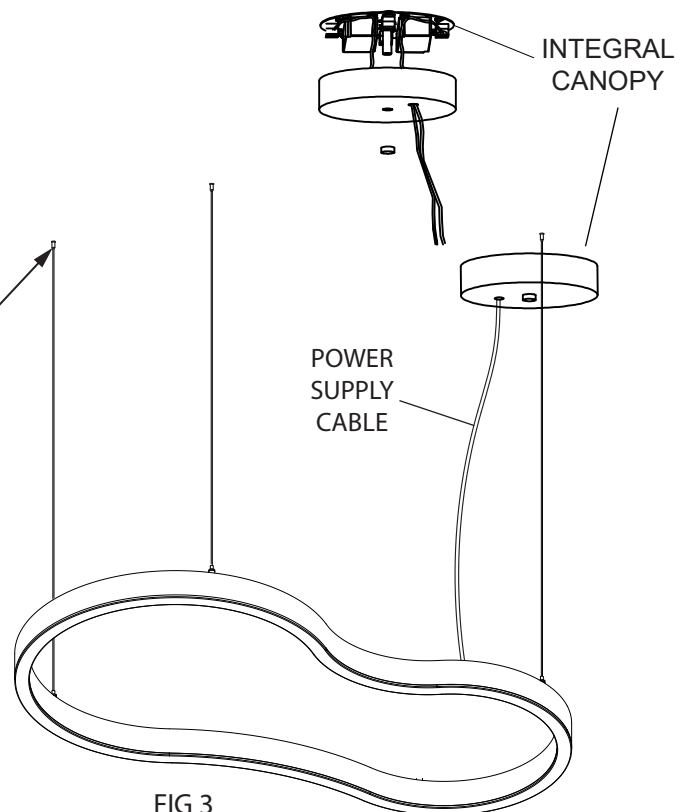


FIG 3

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

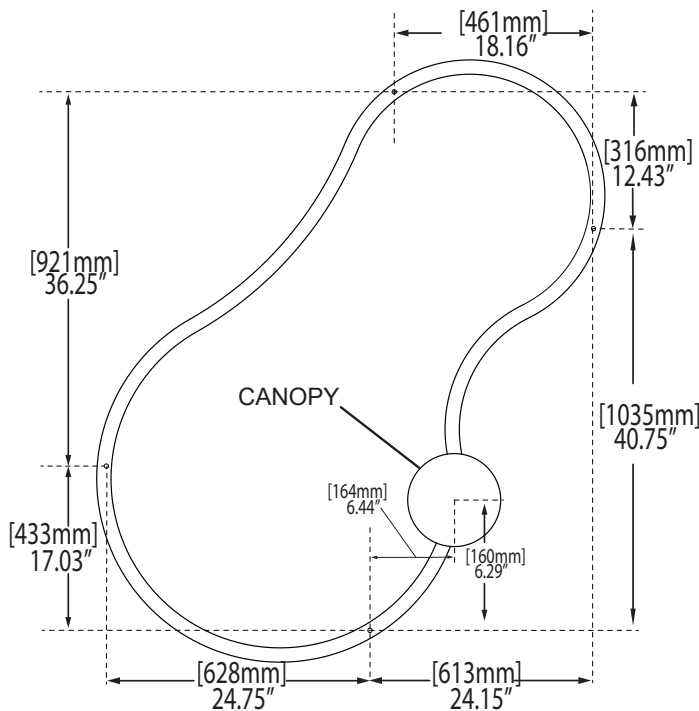


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

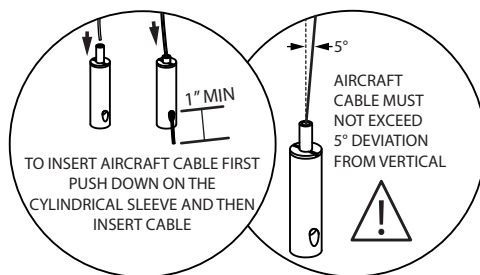


FIG 4

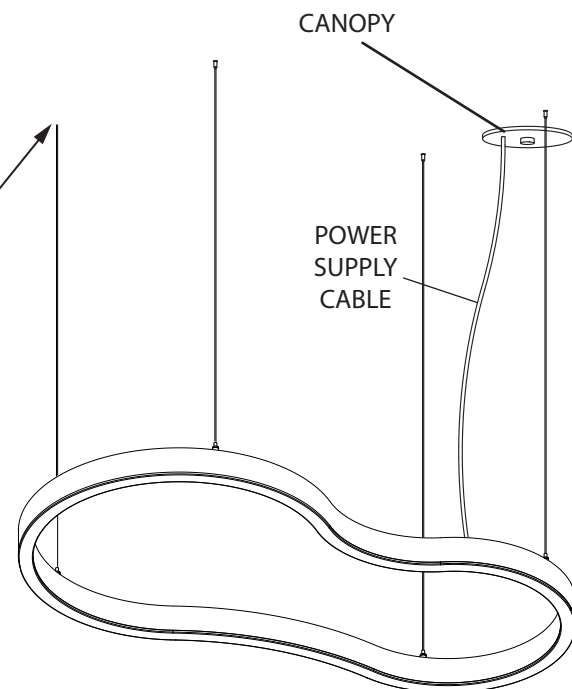


FIG 3

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

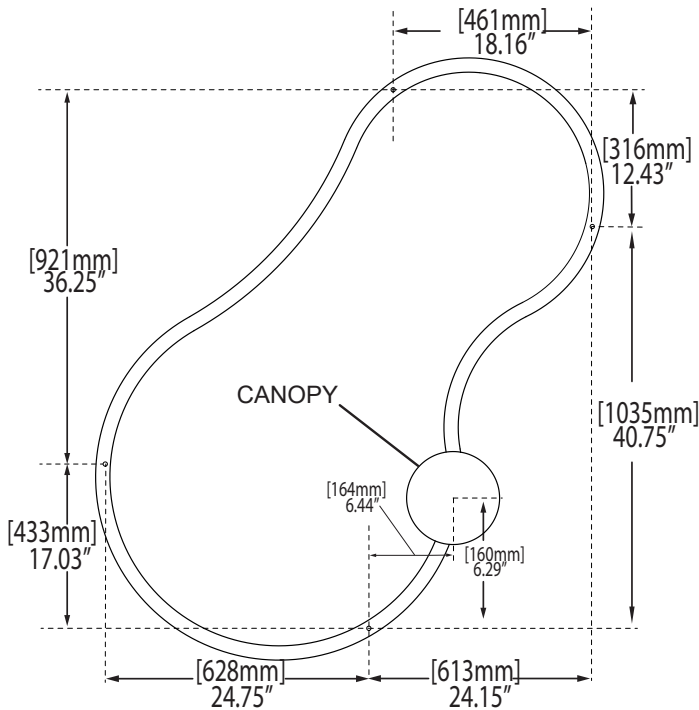


FIG 1

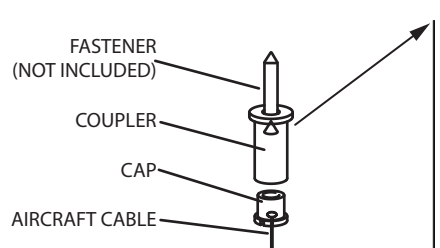


FIG 2

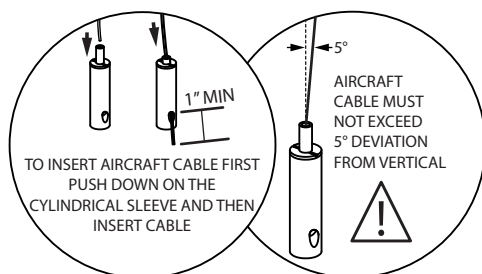


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

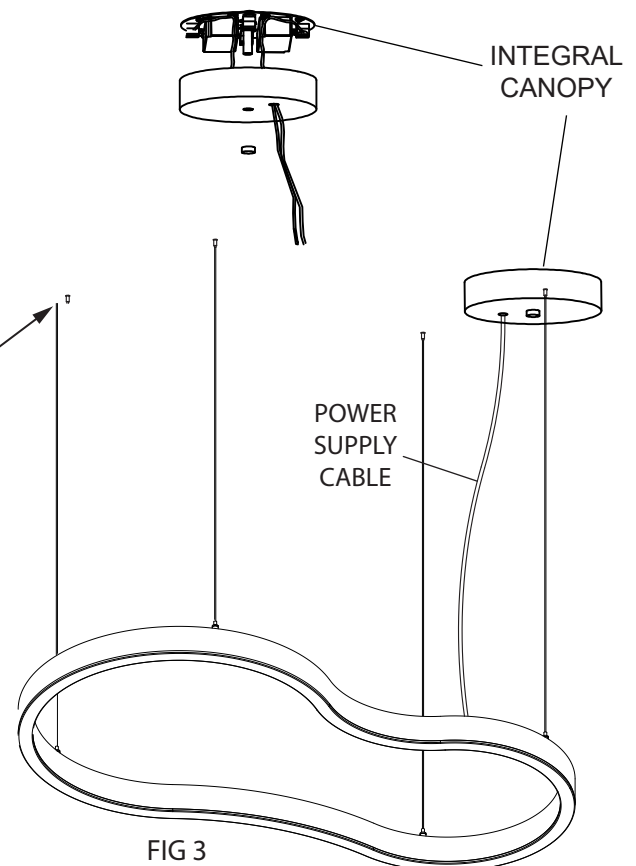


FIG 3

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

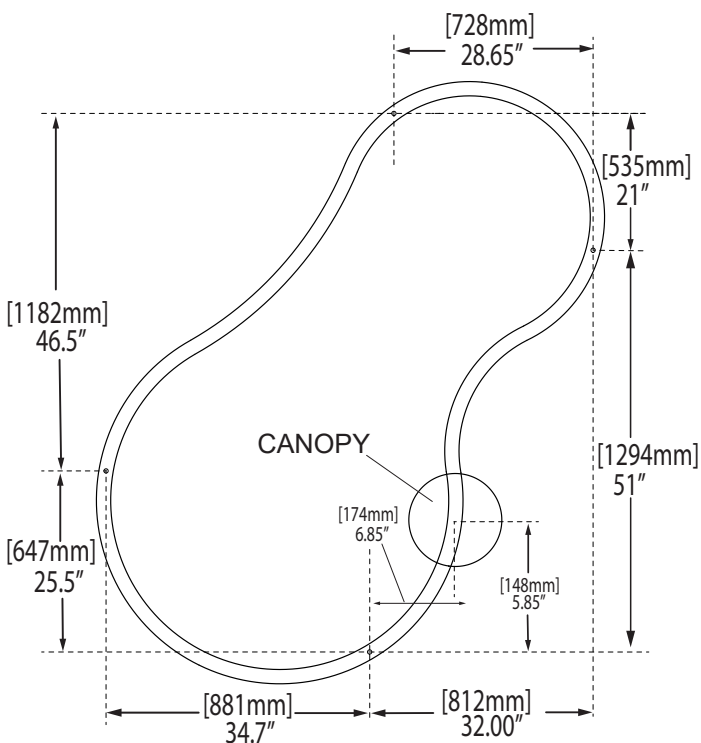


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

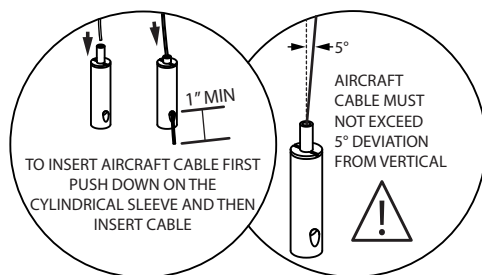


FIG 4

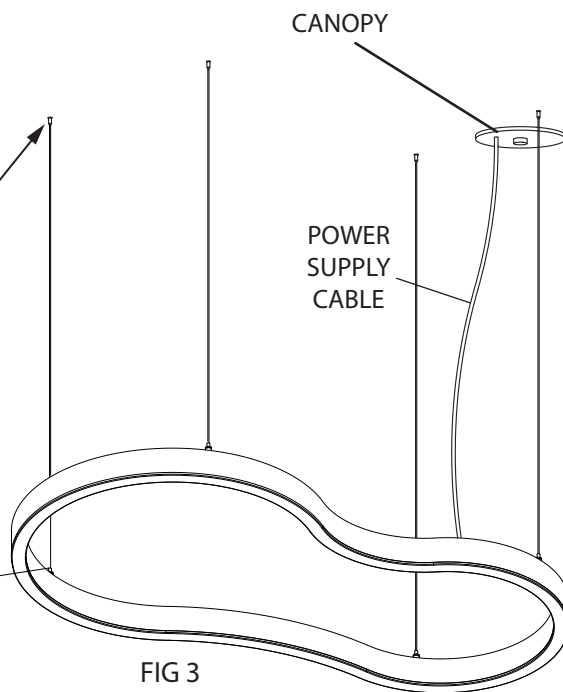


FIG 3

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

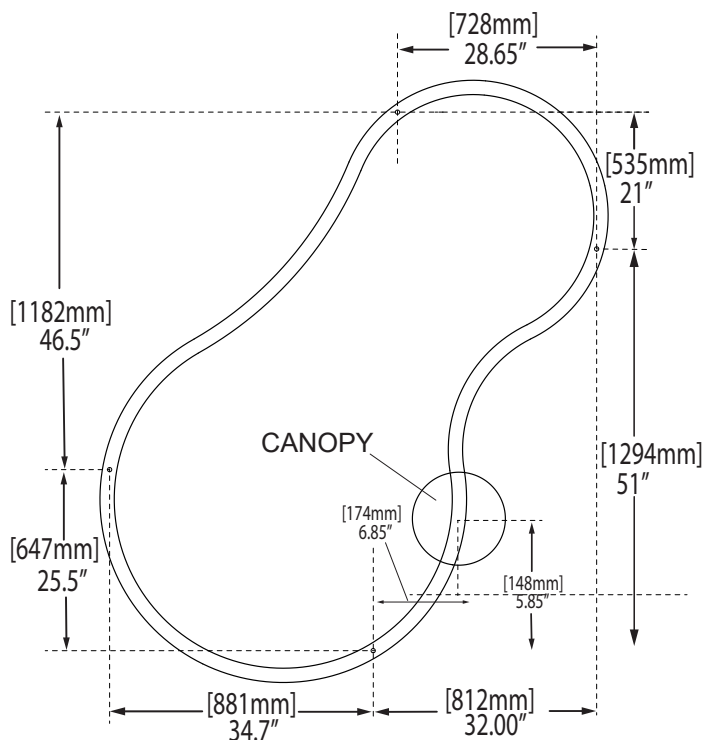


FIG 1




FIG 2

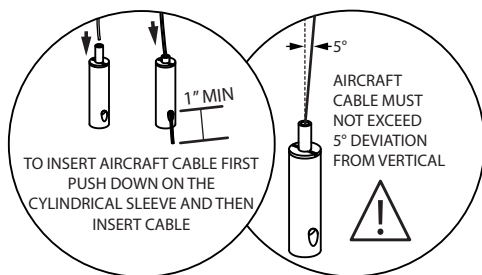


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

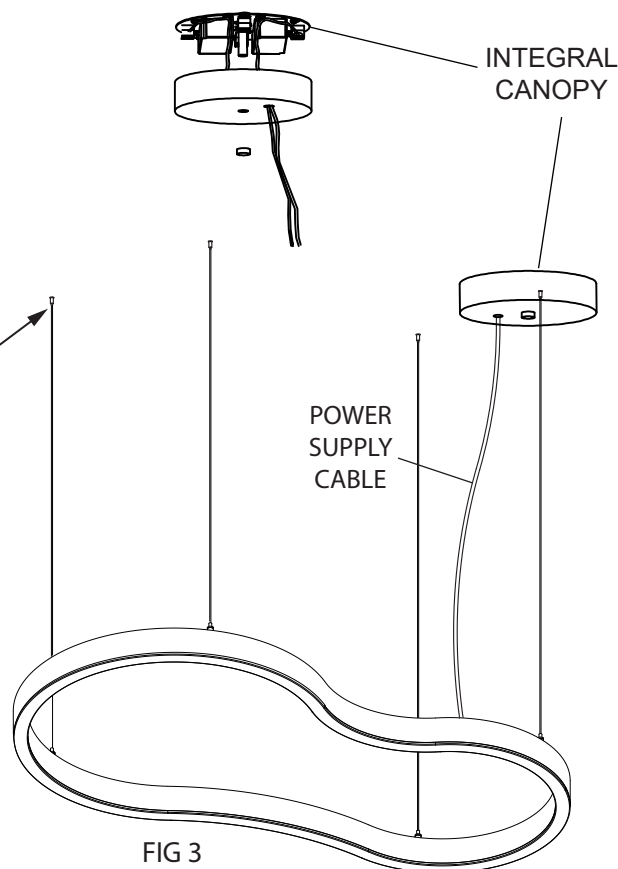


FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

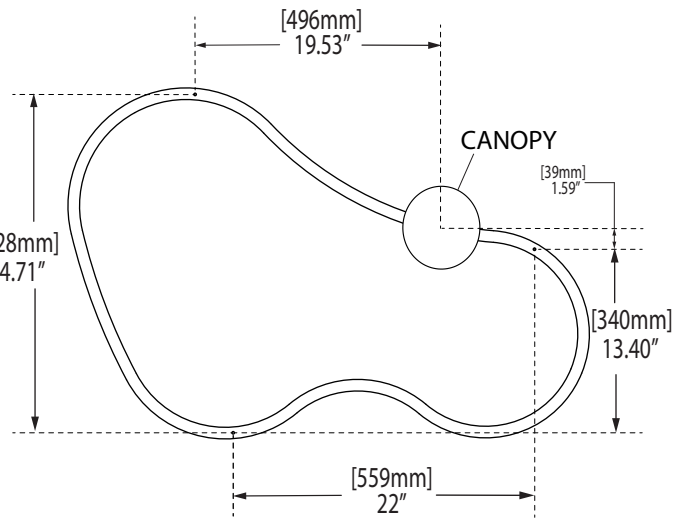


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

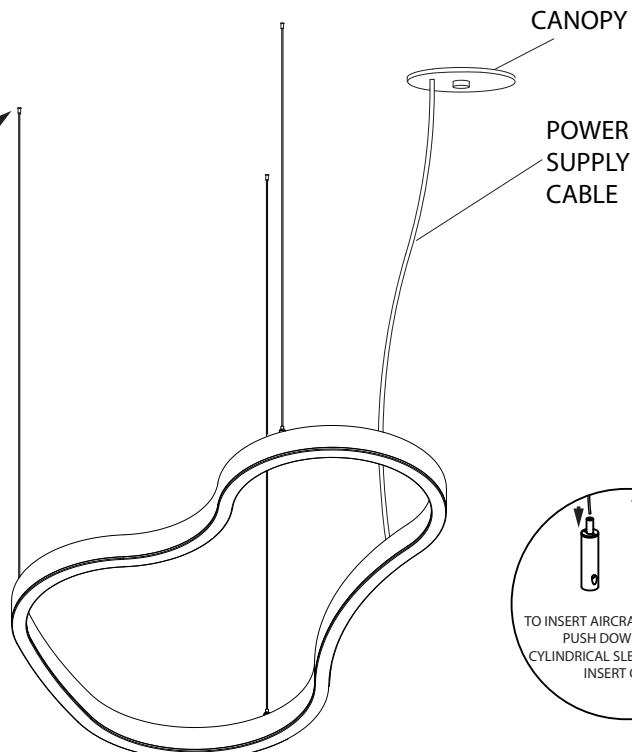


FIG 3

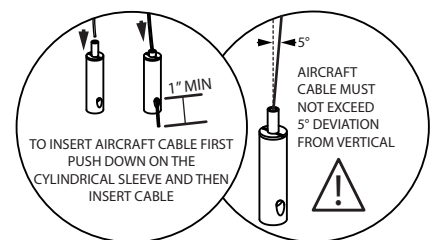


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

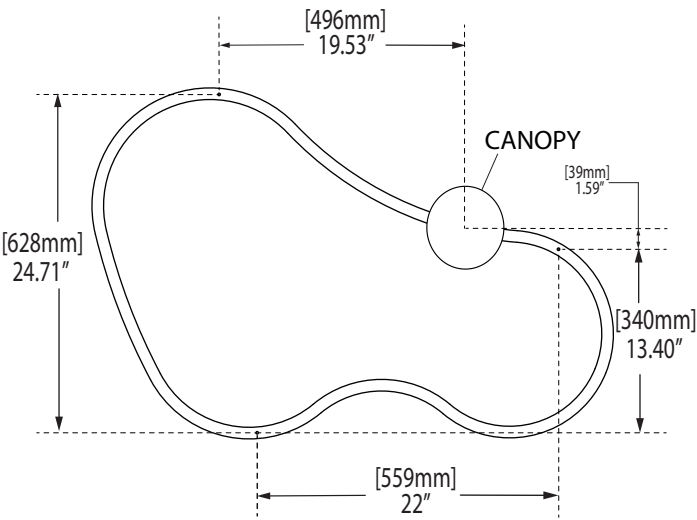


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

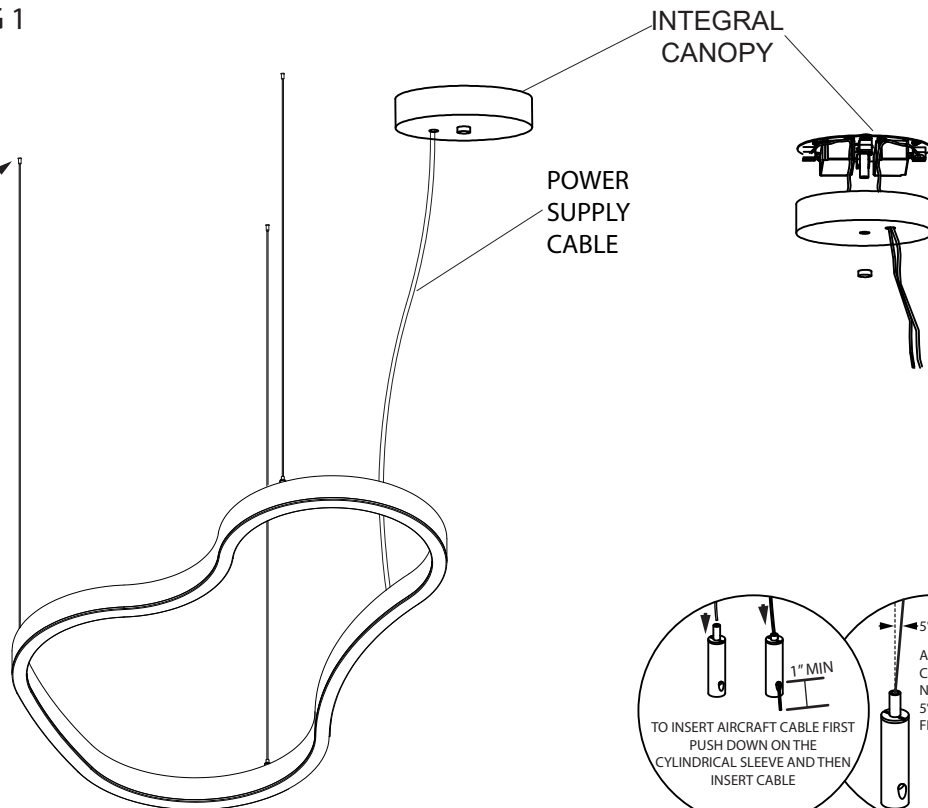


FIG 3

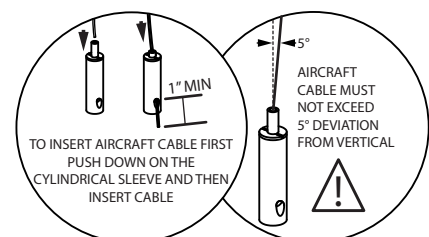


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

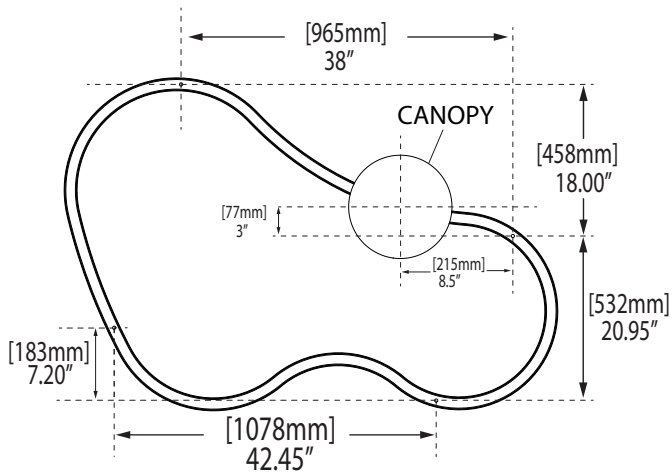


FIG 1




FIG 2

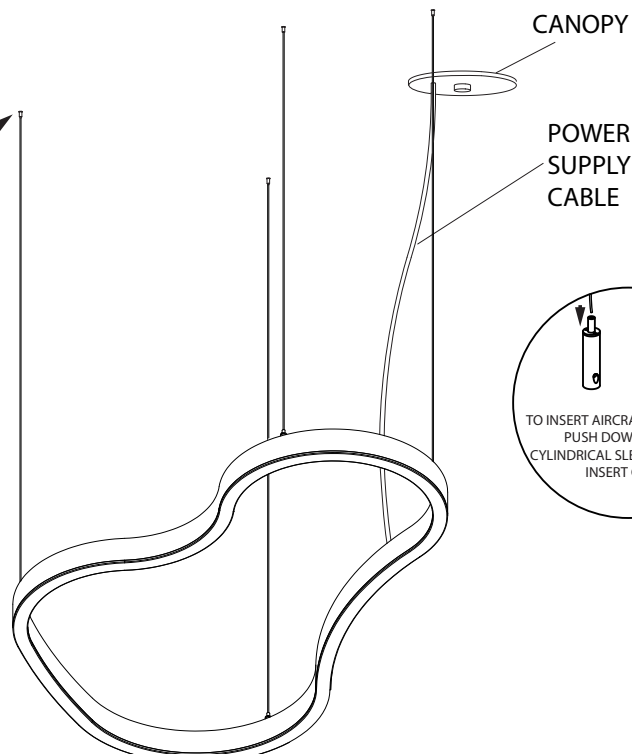


FIG 3

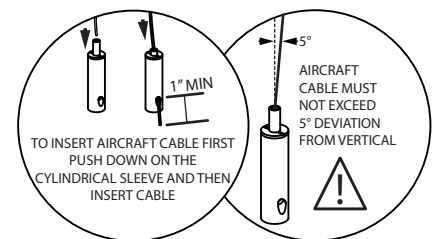


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

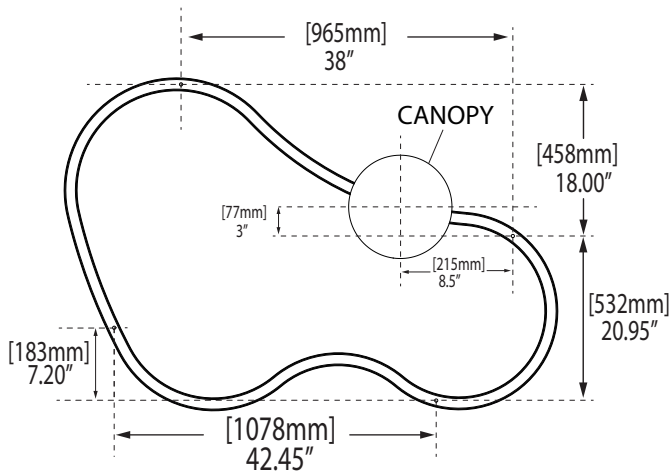


FIG 1




FIG 2

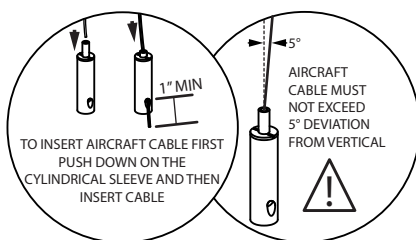


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

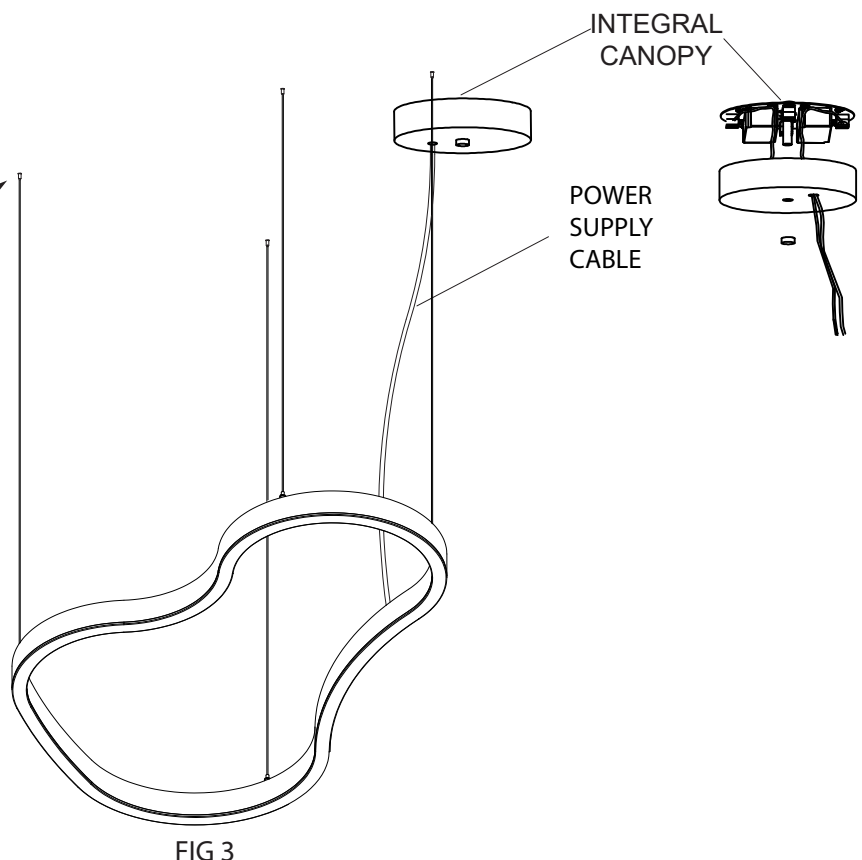


FIG 3




FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

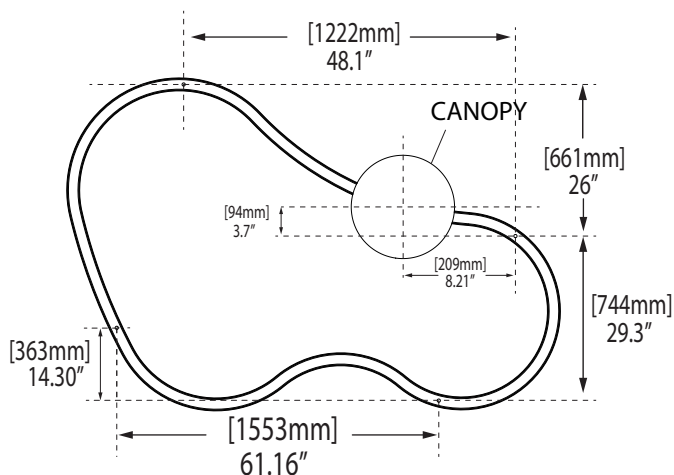

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

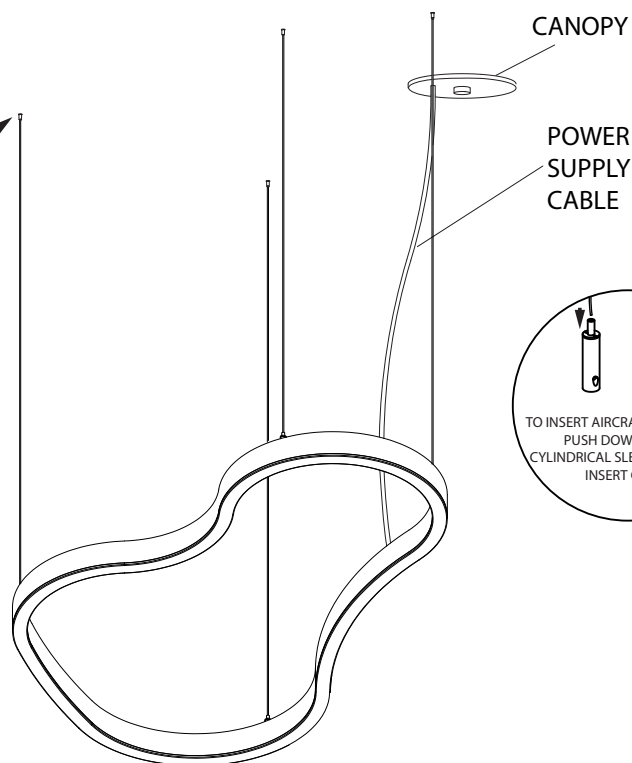


FIG 3

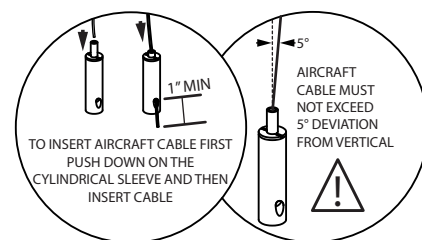


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

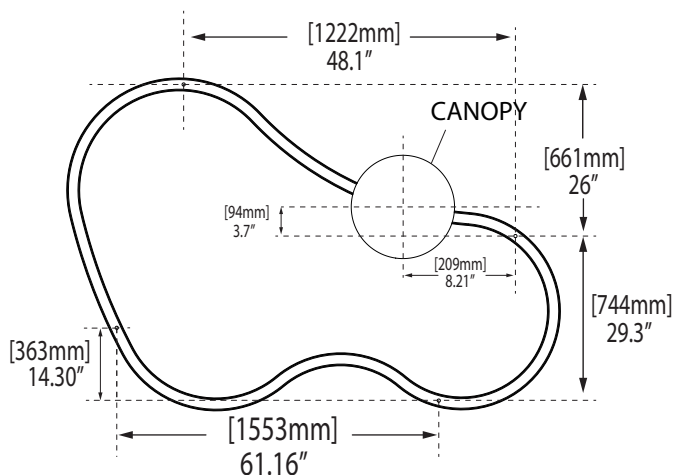


FIG 1




FIG 2

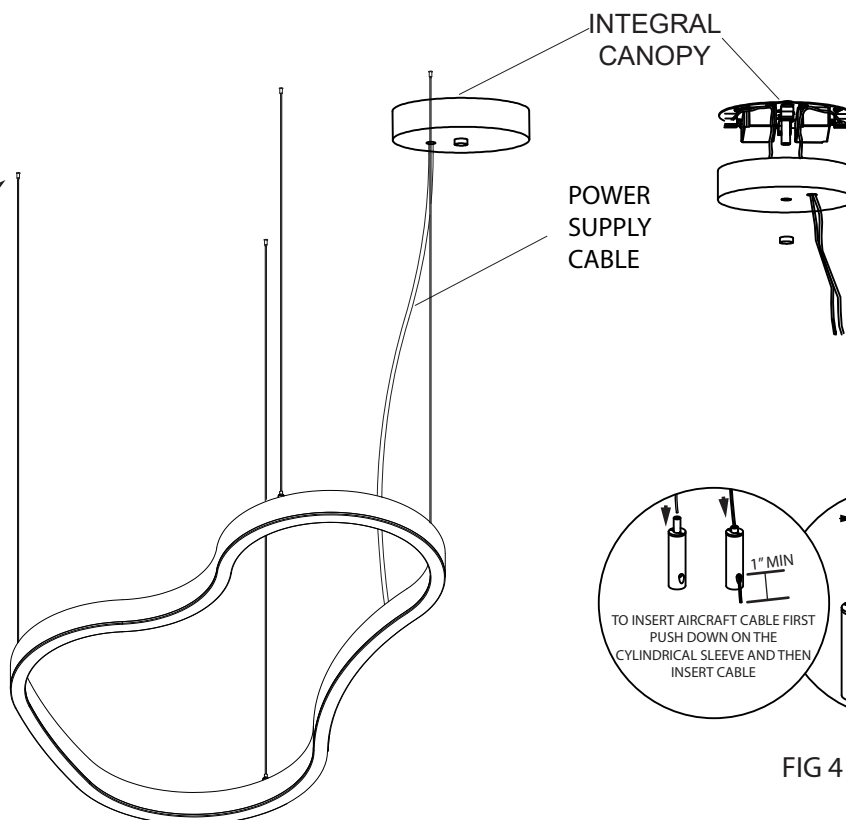


FIG 3

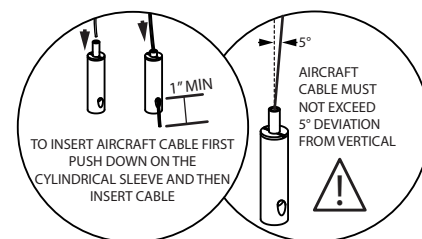


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIXTURE COMES PARTIALLY ASSEMBLED




PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

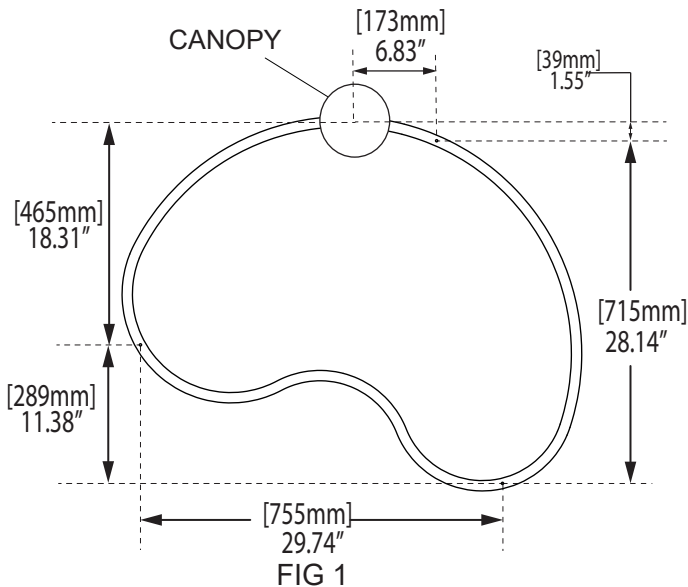

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

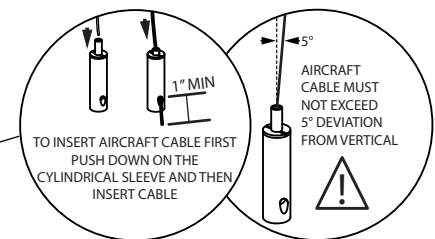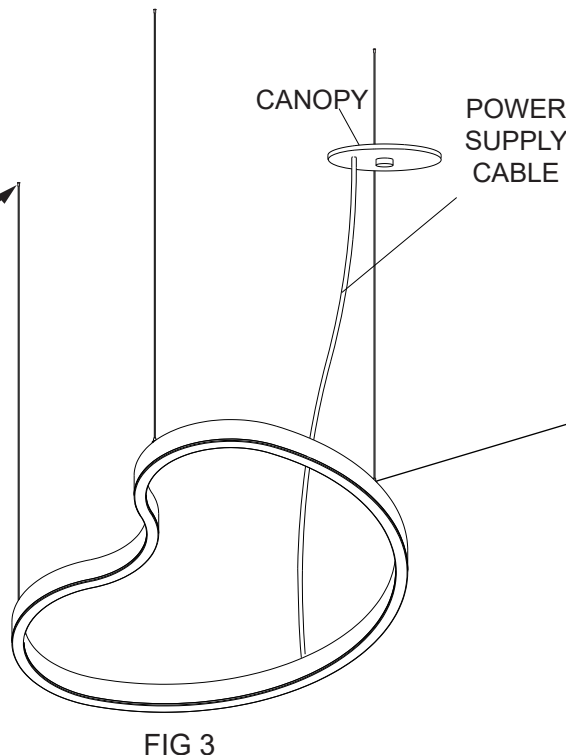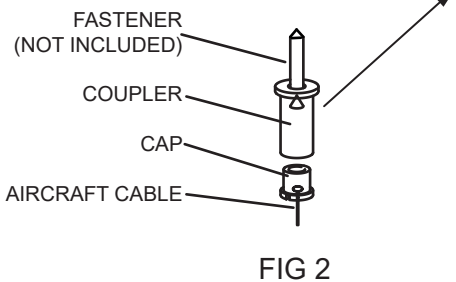



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

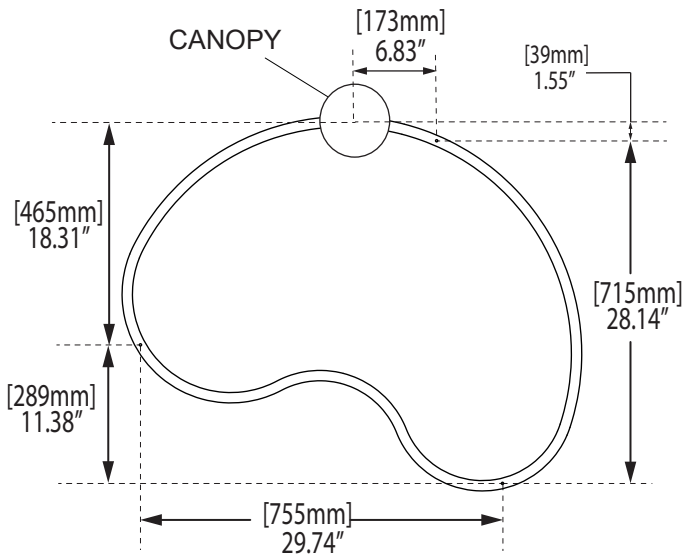


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

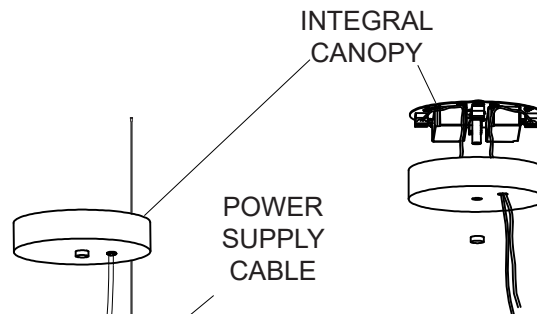


FIG 3

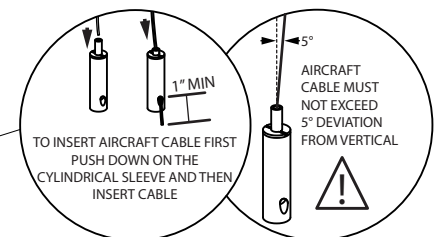


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING

2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)

3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)

4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED

6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES

7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

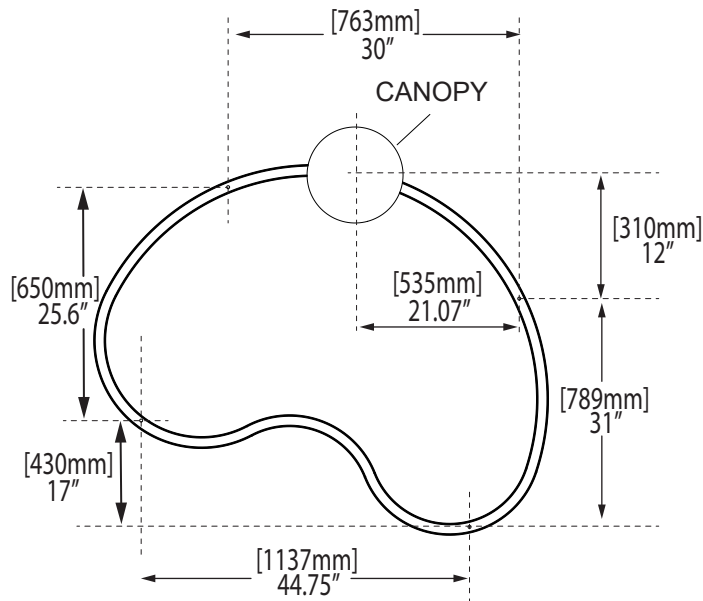


FIG 1

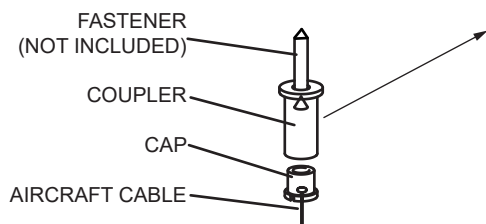


FIG 2

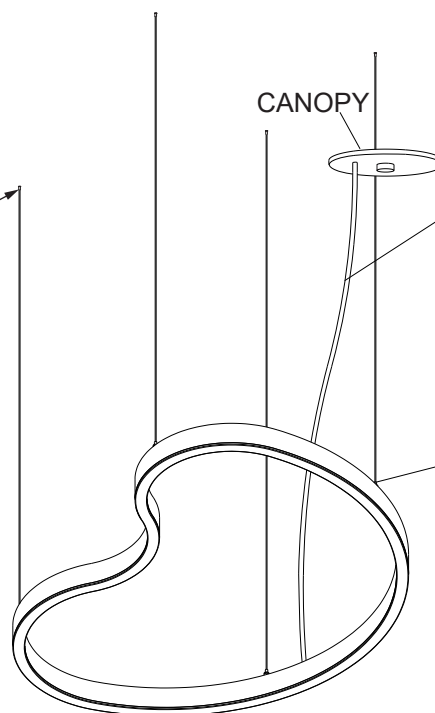


FIG 3

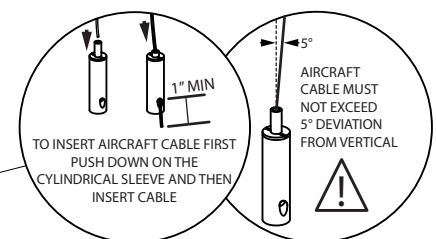


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

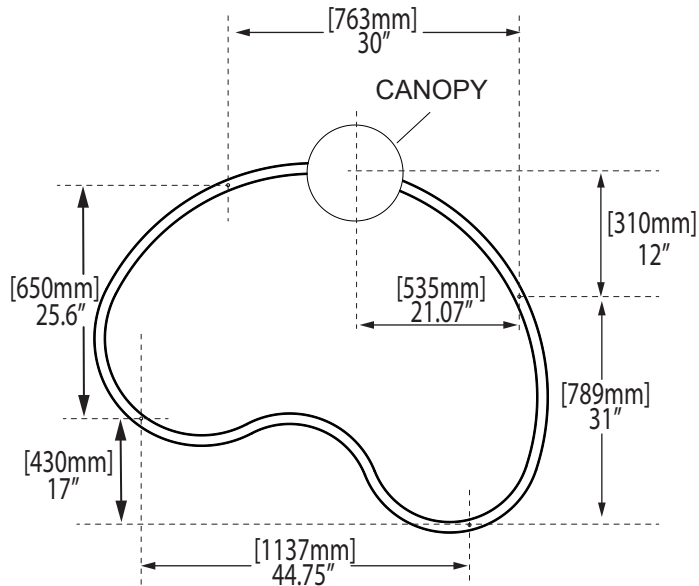


FIG 1

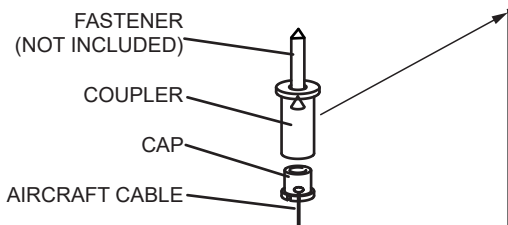


FIG 2

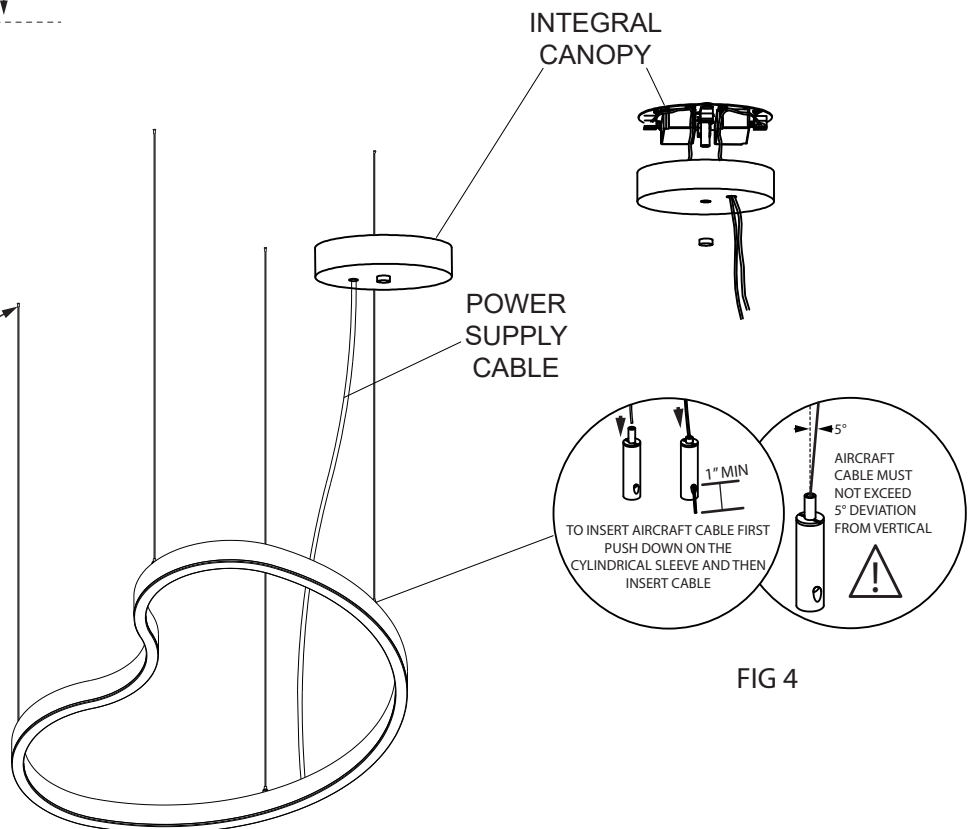


FIG 4

FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

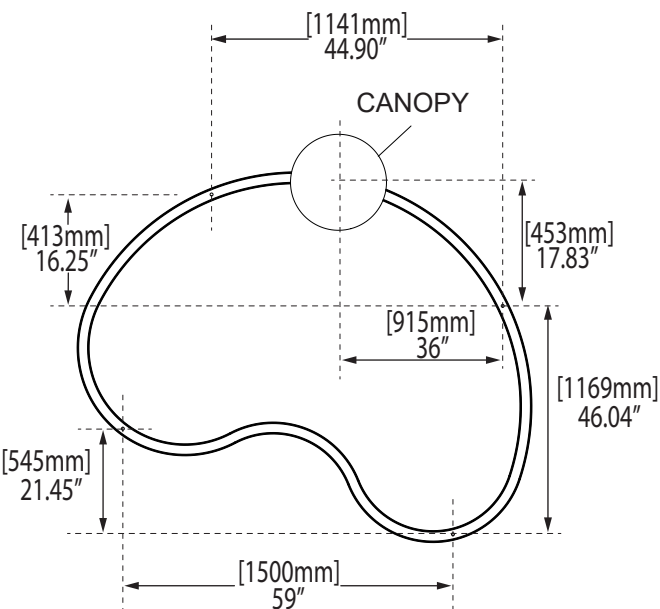


FIG 1

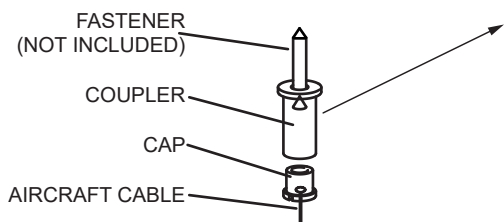


FIG 2

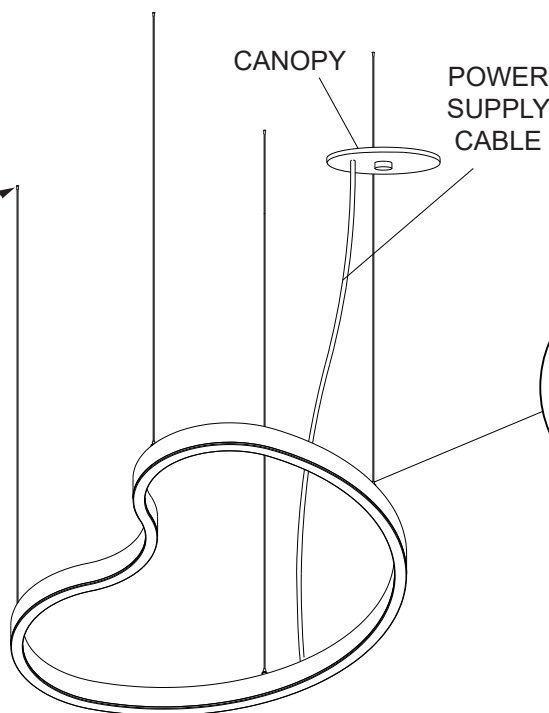


FIG 3

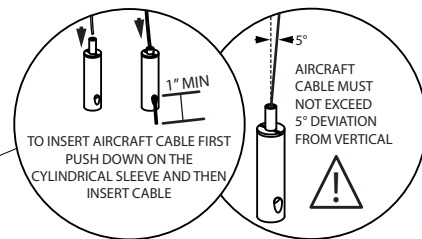


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

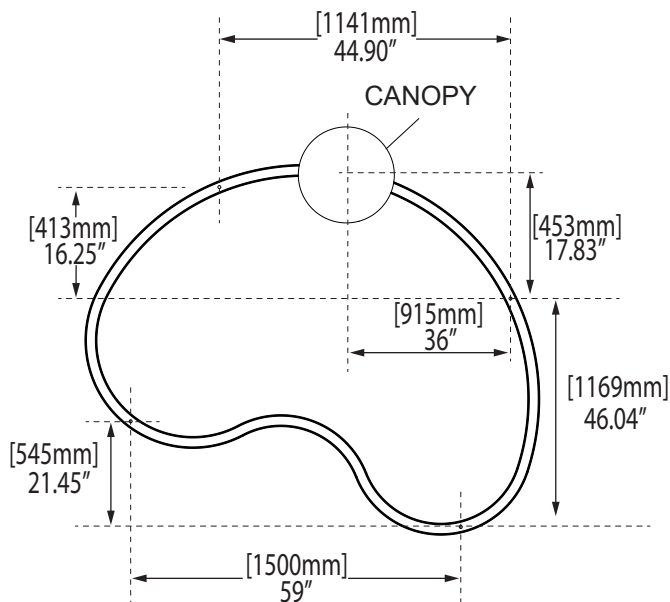


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

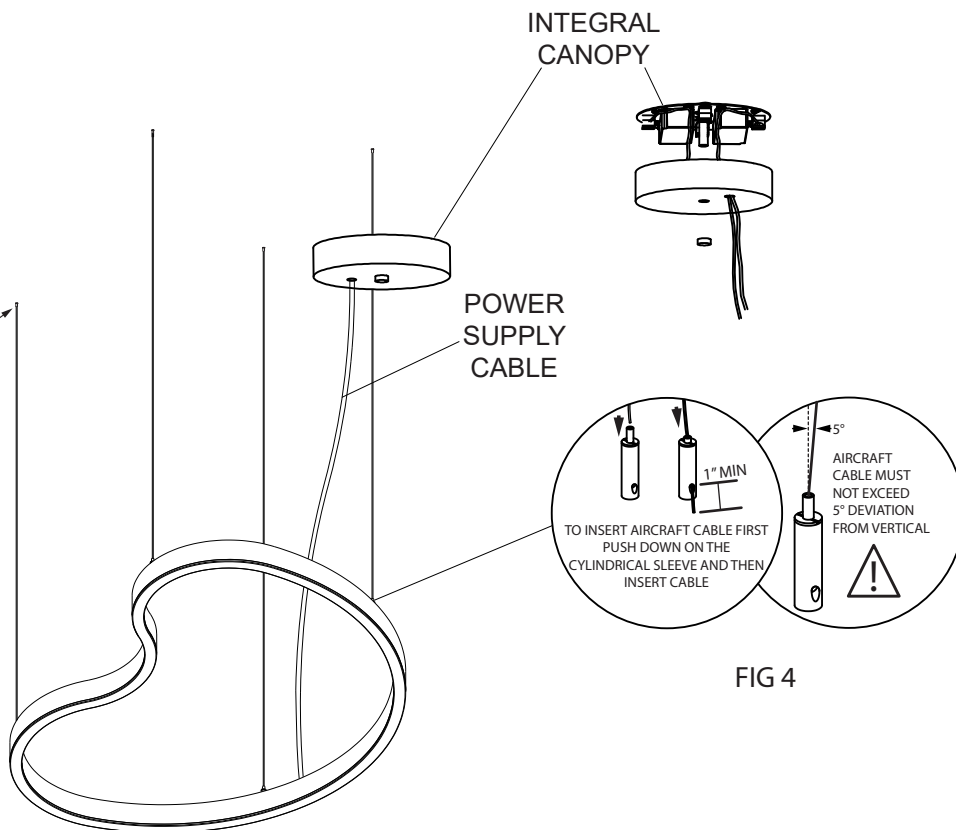


FIG 4

FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED



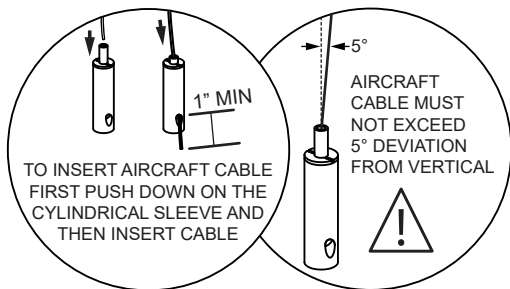


FIG 4

FIG 1

FIG 2

FIG 3

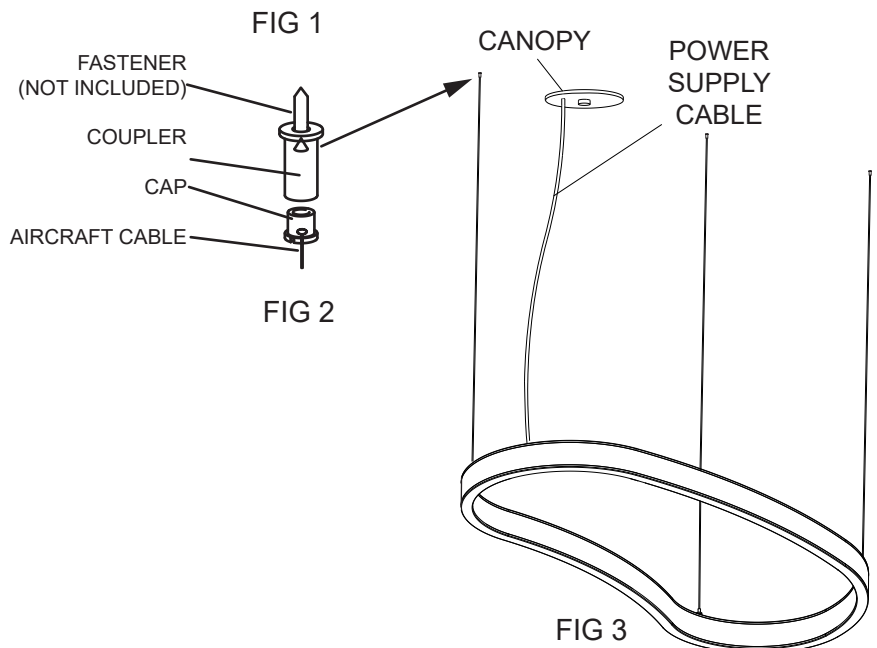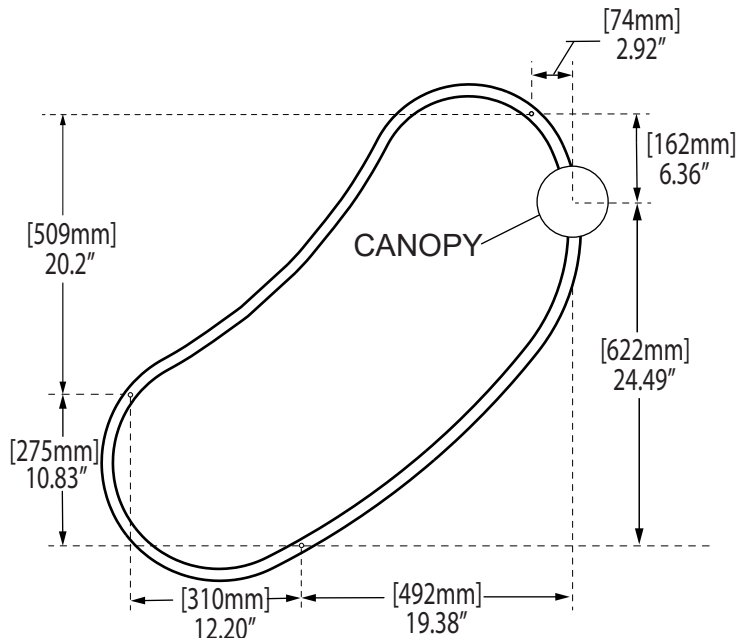





FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

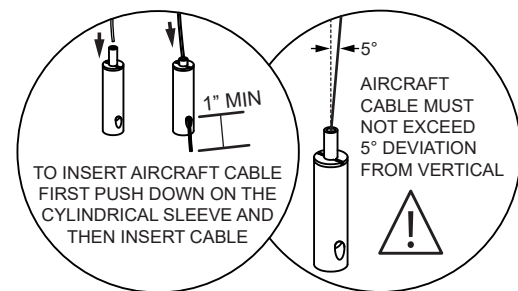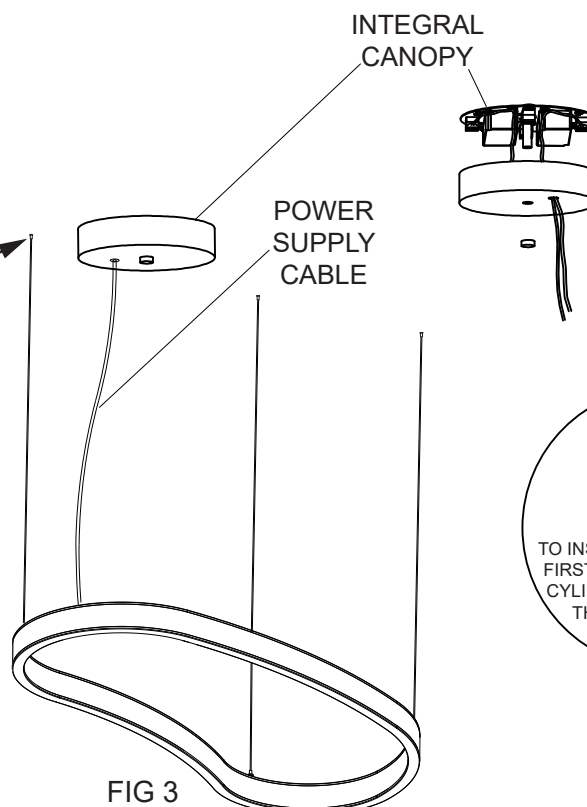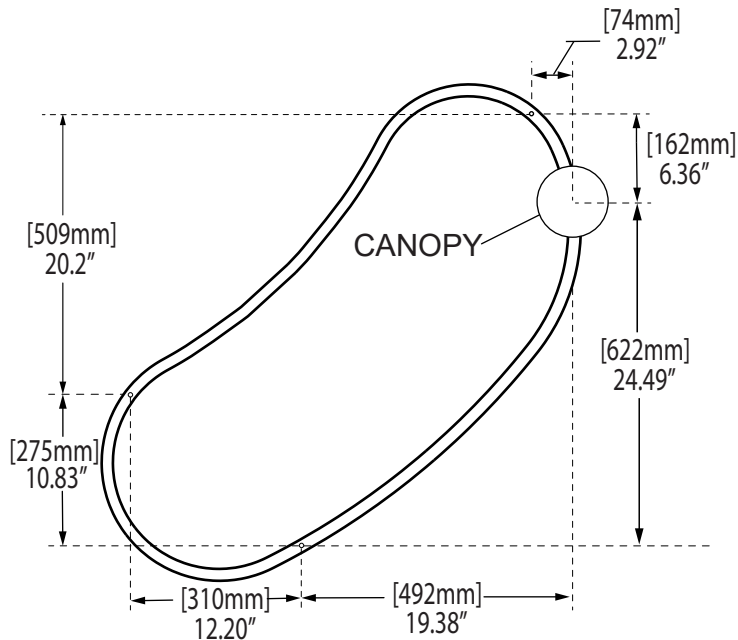



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

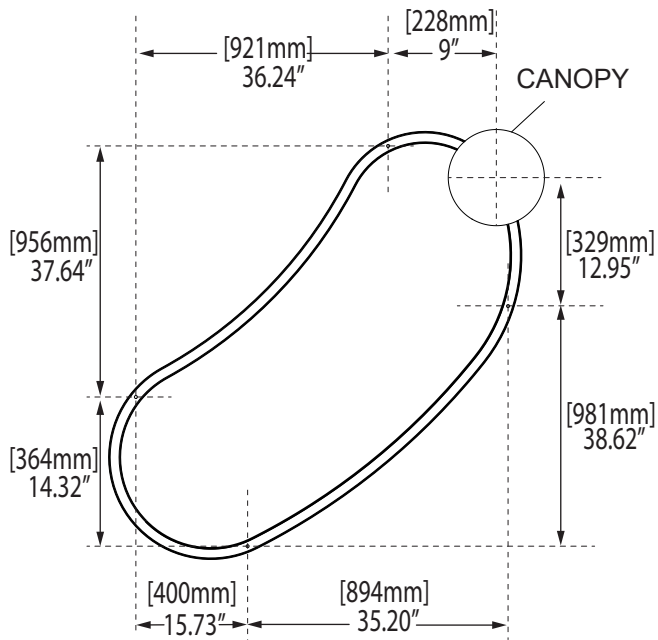


FIG 1

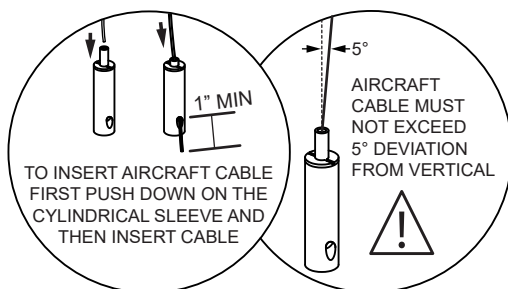


FIG 4

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

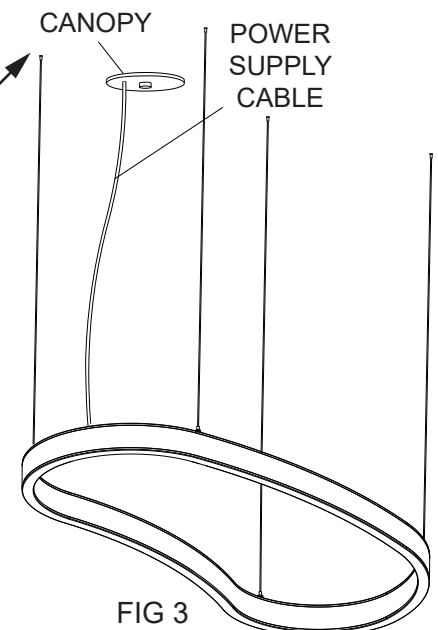


FIG 3



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

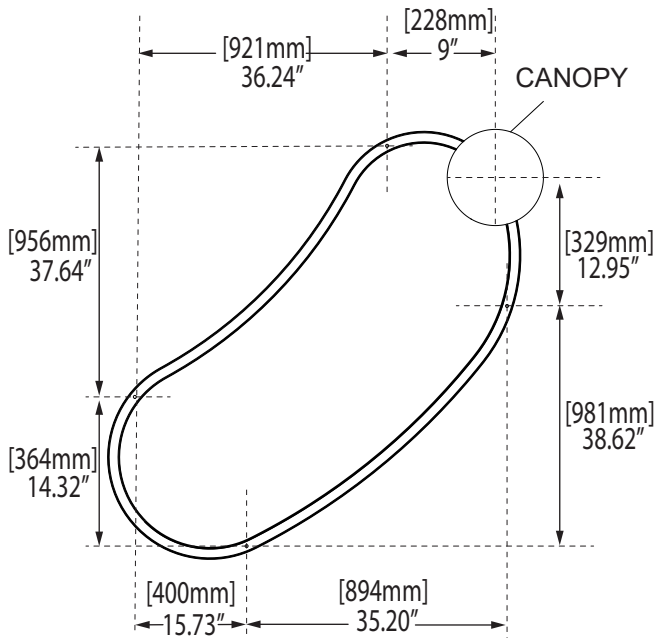


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED

INTEGRAL
CANOPY

POWER
SUPPLY
CABLE




FIG 2

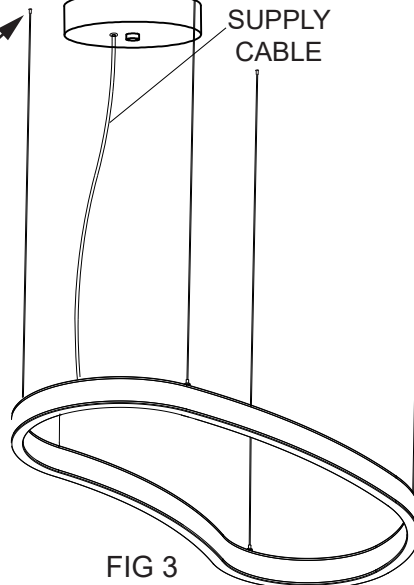


FIG 3

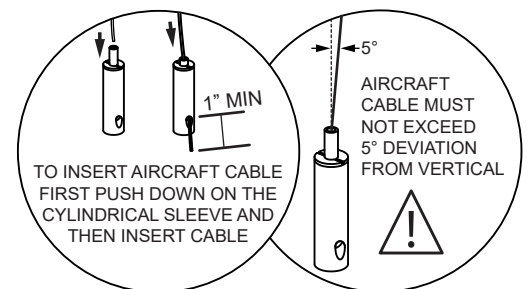


FIG 4



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

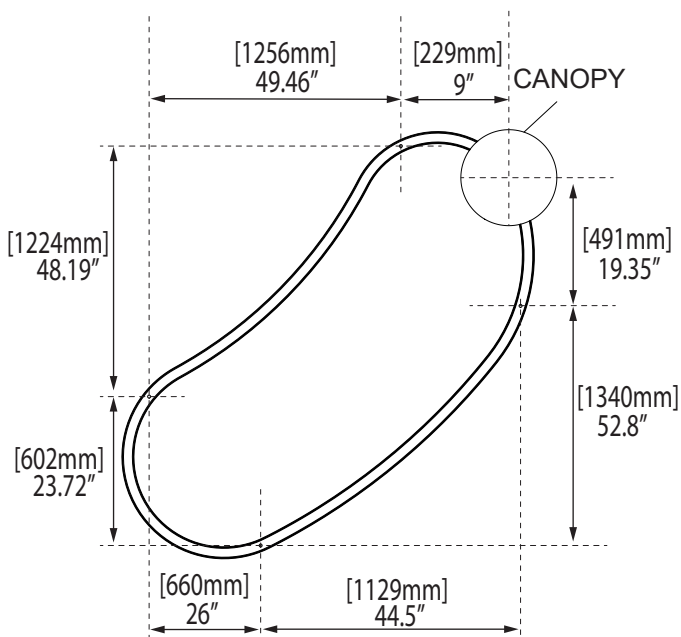


FIG 1

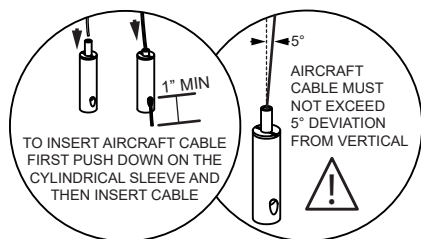


FIG 4




FIG 2

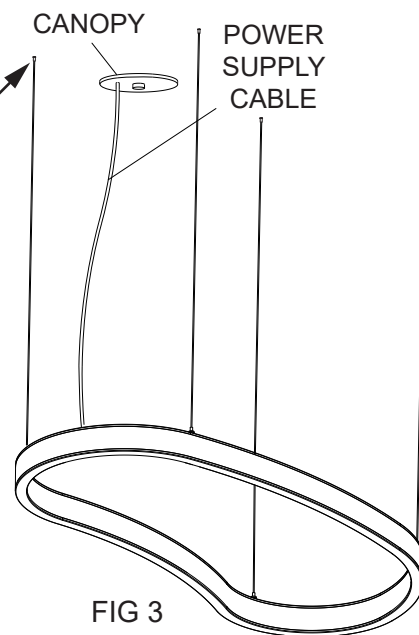


FIG 3

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED



FIXTURE COMES PARTIALLY ASSEMBLED

PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

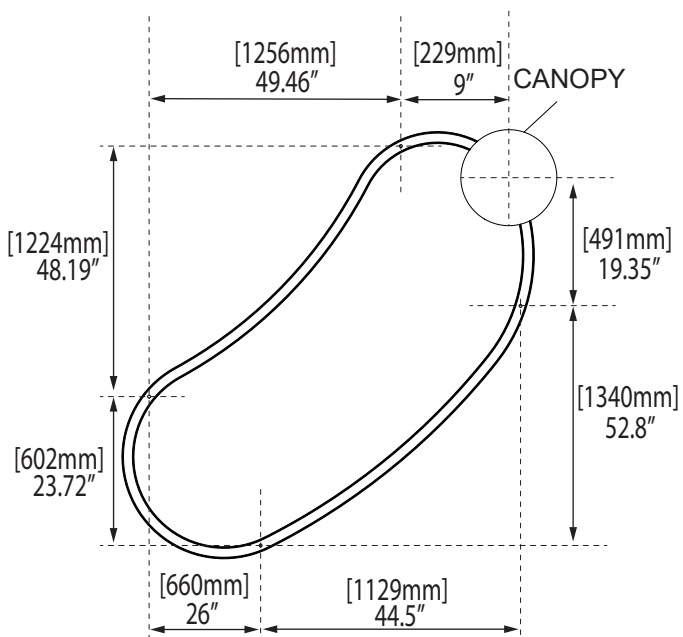


FIG 1

1. USING FIG 1 AS A GUIDE, MOUNT THE COUPLERS (x3) TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF THE CEILING
2. PASS THE AIRCRAFT CABLES THROUGH THE CAPS (SEE FIG 2)
3. FASTEN THE CAPS TO THE COUPLERS (SEE FIG 2)
4. LIFT THE FIXTURE AND ATTACH THE LOOSE ENDS OF THE AIRCRAFT CABLES TO THE CABLE GLIDERS (SEE FIG 4)
5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX USING THE BRACKET / NIPPLE / FINAL ASSEMBLY PROVIDED
6. LEVEL OR TILT THE FIXTURE USING THE CABLE GLIDERS. TO RELEASE THE GRIPLOCK ON THE GLIDER, PRESS THE PLUNGER (TIP OF THE GLIDER-FIG 4). IF DESIRED, CUT THE EXCESS CABLE CHECK THE TENSION IN SUSPENSION CABLES
7. RE-CHECK THE ENTIRE FIXTURE, THE HOUSING HAS SOME FLEXIBILITY. STAND BACK AND VISUALLY CHECK THE FIXTURE FOR UNEVEN PORTIONS, ADJUST THE AIRCRAFT CABLE AND CUT THE EXCESS CABLE IF DESIRED




FIG 2

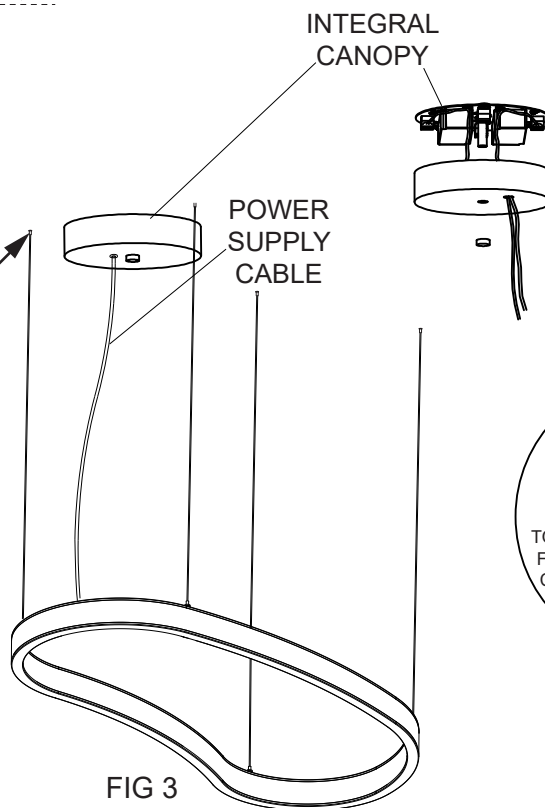


FIG 3

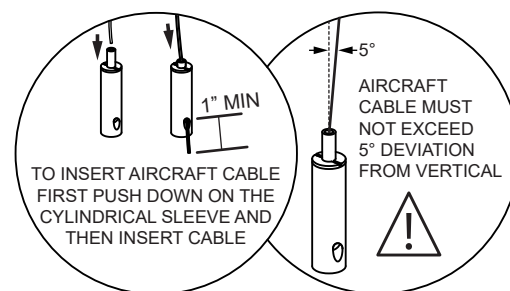


FIG 4