

FIG 1

FIXTURE COMES PARTIALLY ASSEMBLED



PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION



NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

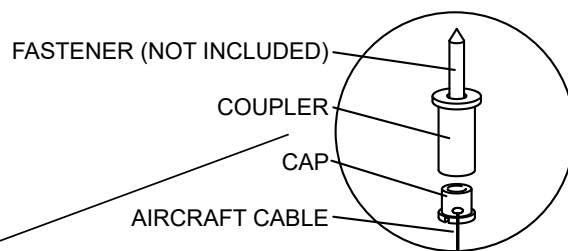


FIG 4

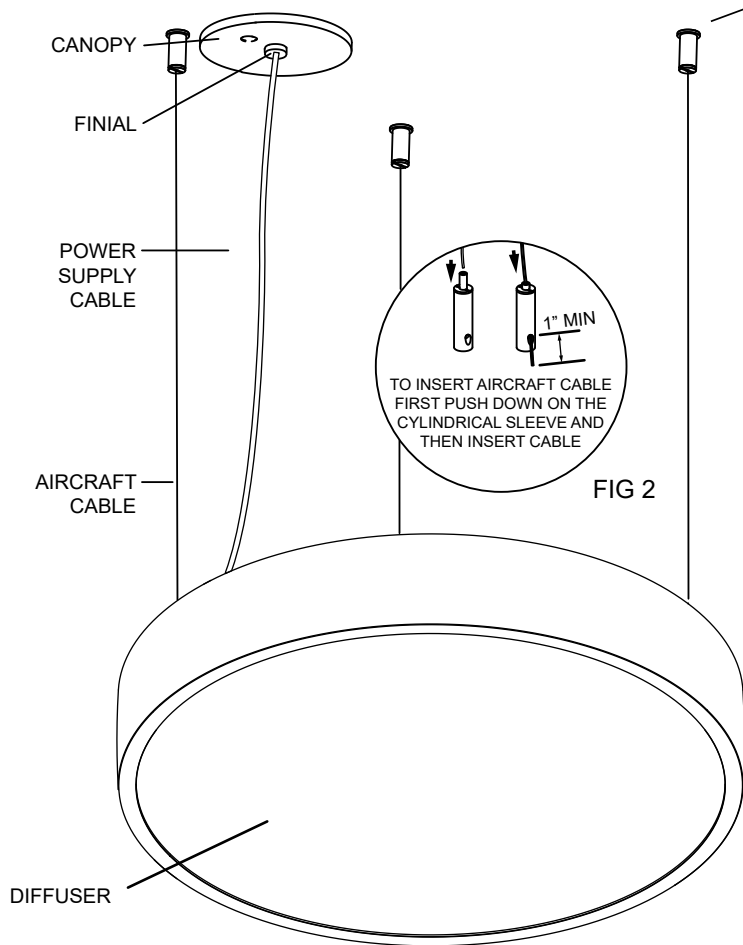


FIG 3

1. MOUNT THE COUPLERS TO THE CEILING USING APPROPRIATE FASTENERS (NOT INCLUDED) ACCORDING TO THE STRUCTURE OF CEILING. (SEE FIG 1)

2. PASS THE AIRCRAFT CABLE THROUGH THE CAPS. (SEE FIG 4)

3. FASTEN THE CAPS TO THE COUPLERS.

4. LIFT THE FIXTURE AND ATTACH THE LOOSE END OF THE CABLES TO THE CABLE GLIDERS.

5. MAKE APPROPRIATE WIRING CONNECTIONS AND ATTACH THE CANOPY TO THE JUNCTION BOX.

6. ADJUST THE FIXTURE TO THE DESIRED HEIGHT AND ANGLE USING CABLE GLIDERS.