

FIXTURE COMES PARTIALLY ASSEMBLED.



Ensure electrical circuit is disconnected before installation.




Luminaires must be installed in accordance with national electrical code and local regulation.


Standalone / non-continuous installation:

- 1: Refer to "Aircraft Cable Suspension" installation instruction sheet for all mounting types.
- 2: Mount the couplers to the ceiling using appropriate fasteners (not included).
- 3: Pass the aircraft cables through the caps.
- 4: Fasten the caps to the couplers.
- 6: Lift the fixture and attach the loose ends of the aircraft cables to the cable gliders.
- 7: Make all appropriate ceiling and wiring connections and attach the canopy to the junction box.
- 8: Level the fixture using the cable gliders.
- 9: Trim excess aircraft cable.

HARD CEILING:

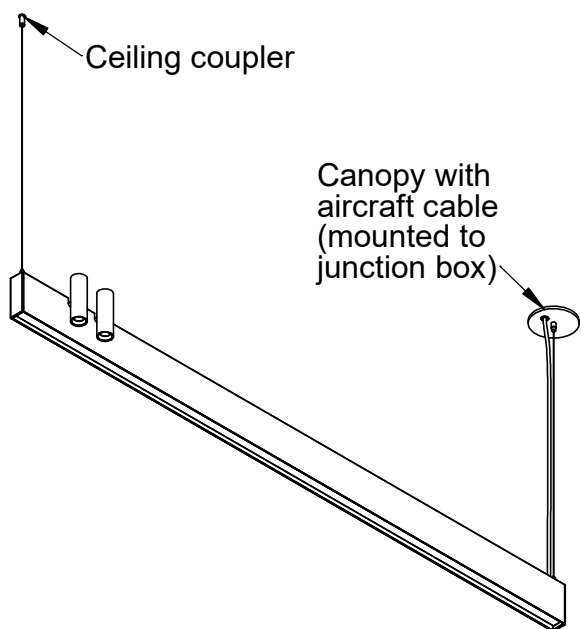

GRID CEILING:

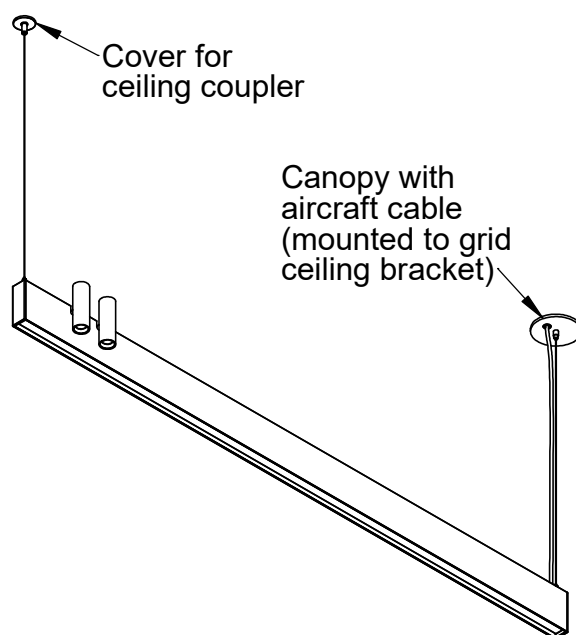

(Fig. 1)

FIXTURE COMES PARTIALLY ASSEMBLED.



Ensure electrical circuit is disconnected before installation.



Luminaires must be installed in accordance with national electrical code and local regulation.

Continuous installation:

10: Begin with the start fixture segment [code: SLS2] (see Fig. 1).

11: Refer to "Aircraft Cable Suspension" installation instruction sheet and make all appropriate ceiling connections.

12: Suspend and level the fixture. DO NOT trim excess aircraft cable until the entire fixture installation is complete.




13: Using a flat head screw driver, remove the top lid at the open end of the next fixture segment; either middle [SLS3] or end [SLS4] (see Fig. 2 for the end fixture segment).

14: Unscrew and remove the lock bracket in the next fixture segment (see Fig. 3).

15: Suspend the middle / end [SLS3 / SLS4] fixture segment and connect it to the previous segment by sliding them together (see Fig. 4).


16: Open the latch mechanism on the middle / end segments [SLS3 / SLS4] and attach it to the hook on the previous segment. Push down the latch to pull the fixtures together (see Fig. 5).

17: Re-install the lock bracket removed in step 14 (see Fig. 3).

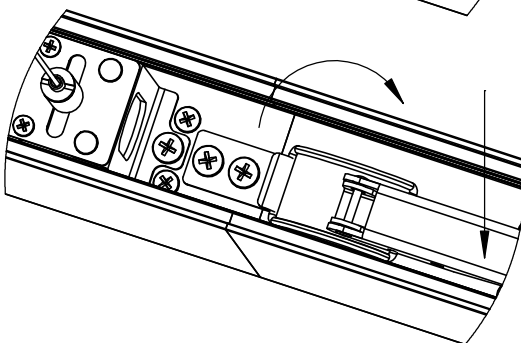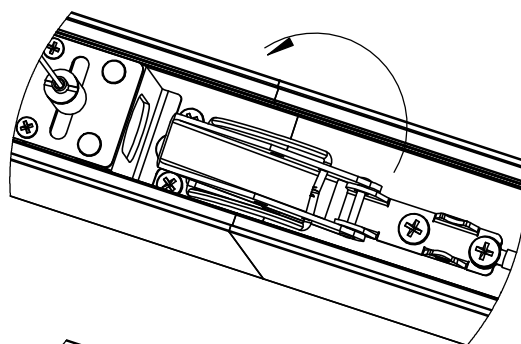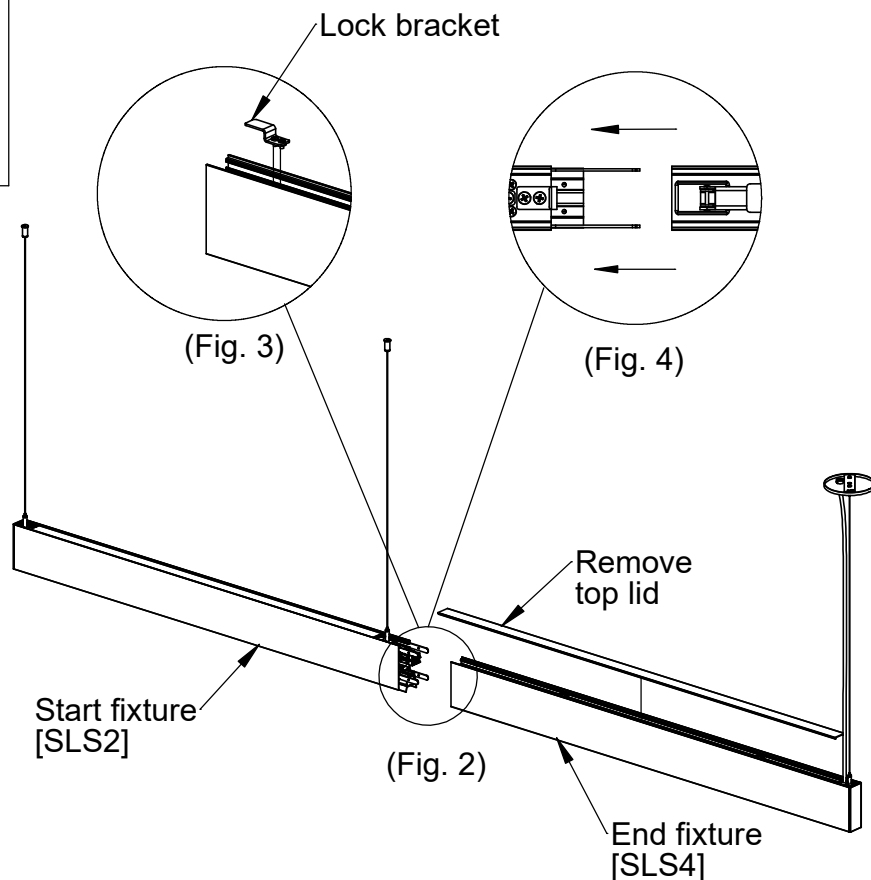

(Fig. 5)

Top view in final position:



FIXTURE COMES PARTIALLY ASSEMBLED.



Ensure electrical circuit is disconnected before installation.



Luminaires must be installed in accordance with national electrical code and local regulation.


Continuous installation:

18: Connect the electrical connectors at junction between sections.

19: Re-install the top lid removed in step 13 (see Fig. 6).

20: Repeat steps 13-19 until entire fixture has been installed.

21: The end section [Code: SLS4] will have the power cord (See Fig. 6). Make appropriate wiring connections and pass the power cord through the canopy.

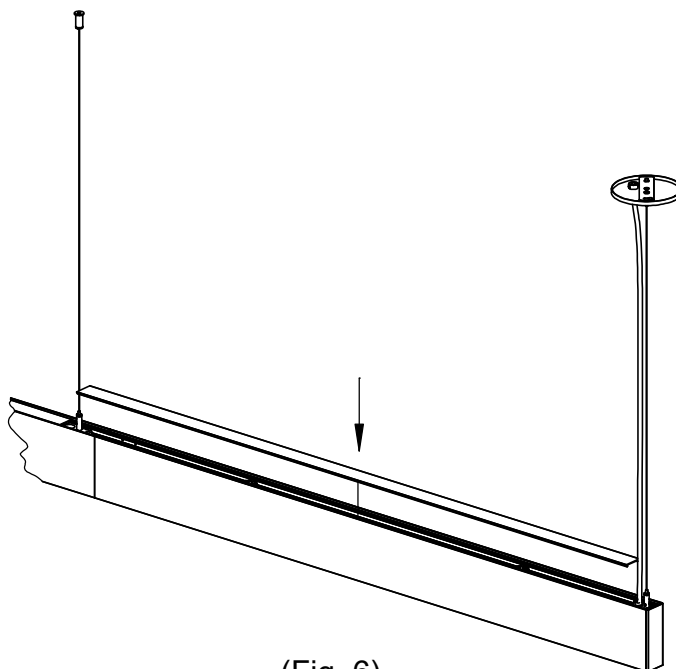

(Fig. 6)

Balance Adjustment Mechanism: (For spotlights)

22: Loosen the glider on the fixture by rotating it counter-clockwise slightly. Move the glider either left or right to level the fixture (see Fig. 7).


23: Balance tip:

- If both spotlights are on the same side (as seen in Fig. 7)
= move the glider to the side where the spotlights are.

- If one spotlight is on the left and the other one is on the right
= keep the glider in the middle.

- If there are no spotlights at the location
= keep the glider in the middle.

24: Once satisfied with balancing the fixture, tighten the glider into desired position by rotating it clockwise.

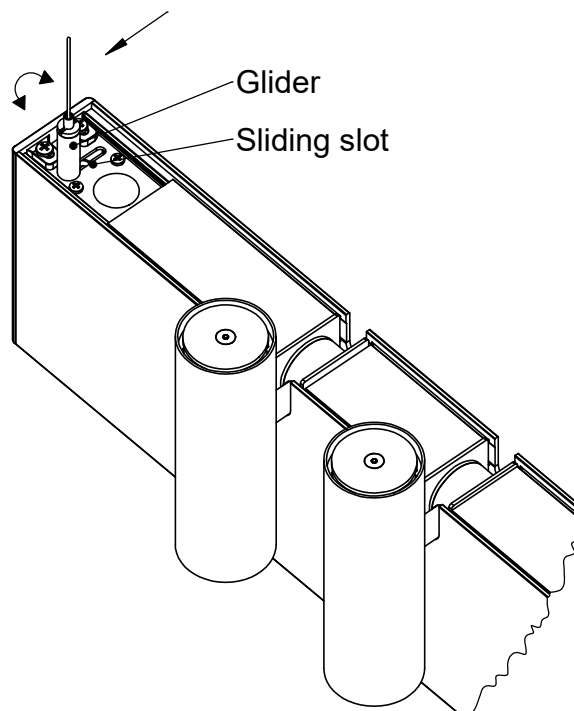

(Fig. 7)

FIXTURE COMES PARTIALLY ASSEMBLED.



Ensure electrical circuit is disconnected before installation.



Luminaires must be installed in accordance with national electrical code and local regulation.

Continuous installation: Section Type Reference

