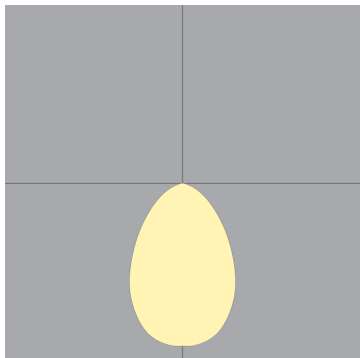
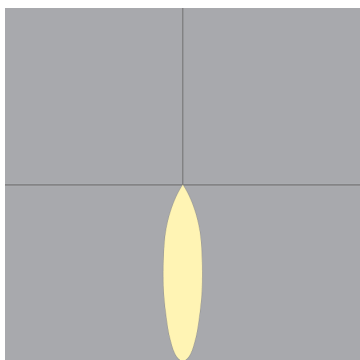
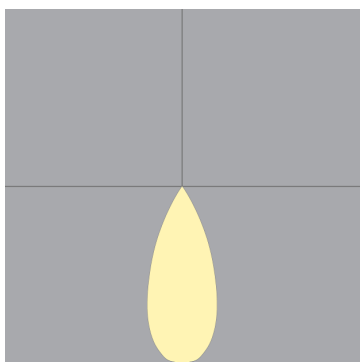
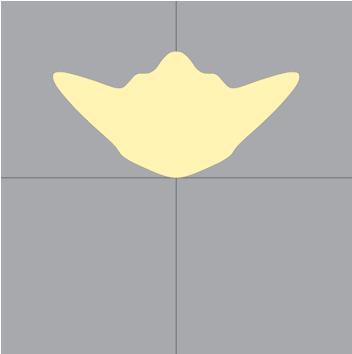
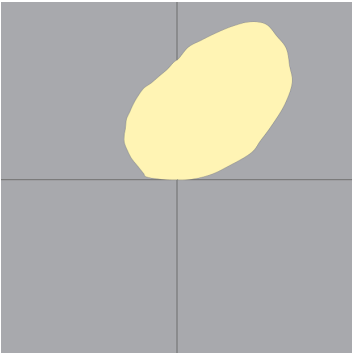


DIRECT - COMFORT (DD4)	LUMENS/FT	WATTS/FT	LPW
	900	12	78
	700	9	81
	500	6	84
	300	3	91

DIRECT - 25° (BA25)	LUMENS/HEAD	WATTS/HEAD	LPW
	620	14	44

DIRECT - 42° (BA42)	LUMENS/HEAD	WATTS/HEAD	LPW
	655	14	47

INDIRECT BATWING (UD1)	LUMENS/FT	WATTS/FT	LPW
	1350	11	122
	1100	9	124
	900	7	130
	700	5	133
	500	4	139
	300	2	151

INDIRECT ASYMMETRIC (UD3)	LUMENS/FT	WATTS/FT	LPW
	900	11	81
	700	9	82
	500	6	86
	300	3	91