
 PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION

 NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

#### INSTALLATION STEPS:

1. Remove top covers from fixture.
2. Slide alignment plates (x4) (if not installed) into position (two in each section in diagonal order) so they span the joint between sections. They may need to be carefully tapped with a hammer (Fig. 1).
3. Install suspension connection bracket (if not installed) on one section of the fixture and small connection bracket on another section using supplied 1/4-20 nuts and lock washers (x6) (Fig. 1).
4. Place 1/4-20 nuts and lock washers (x2) loosely onto studs (Fig. 1).

5. Fasten sections together using alignment plates, connection brackets and supplied 1/4-20 bolt (x1) (Fig. 2).

6. Tighten nuts (x2) from step 4 (Fig. 3).
7. Lock 1/4-20 bolt into place by tightening 1/4-20 nut. (Fig. 3)

8. If necessary, use 1/4-20 bolts on the sides of suspension connection bracket to help align the fixture body sections. Loosen the bolts until they press firmly against the side of the fixture (Fig. 4).
9. Lock bolts into place by tightening internal 1/4-20 nuts (Fig. 4)
10. Use supplied silicone and plastic knives to cover the inside the joints between sections and at the ends to prevent light leaks. (Fig. 4)

11. Replace top covers.

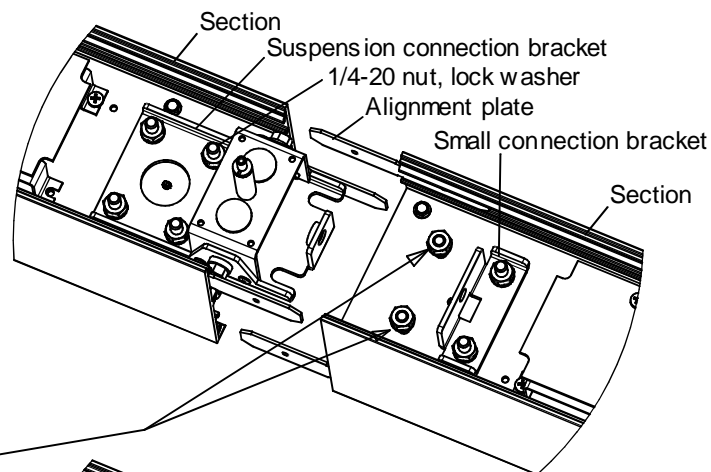


Fig. 1

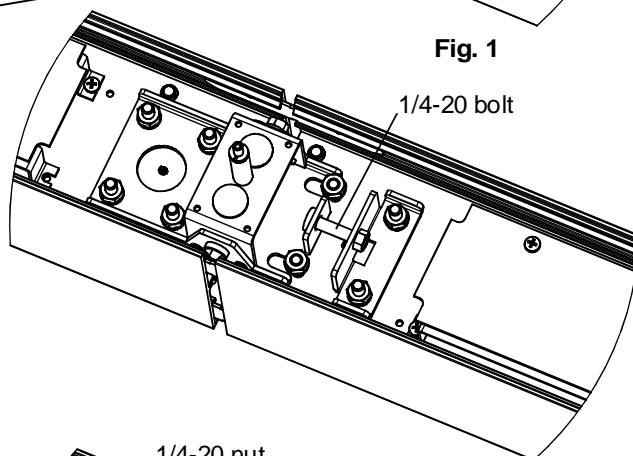


Fig. 2

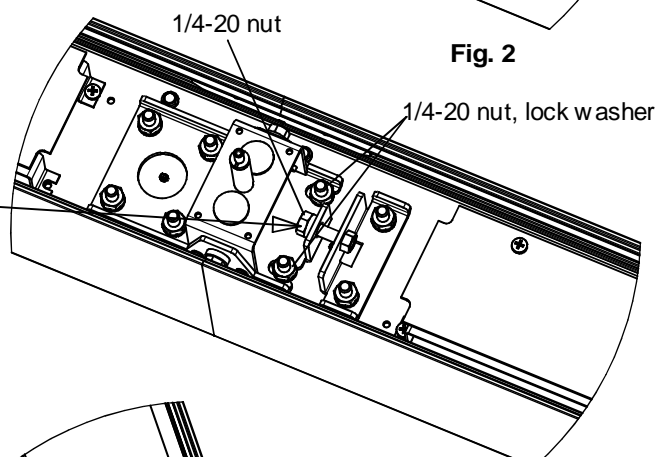


Fig. 3

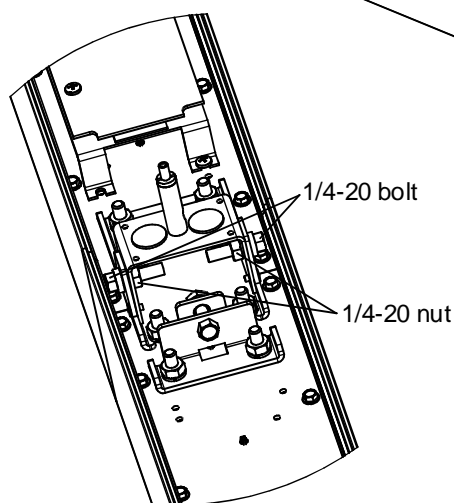


Fig. 4