




- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.  
2: Luminaires must be installed in accordance with national electrical code and local regulation.  
3: Disconnect the power before installing the fixture or servicing.  
4: Min 90°C supply conductors.

Fixture comes partially assembled

-  PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION
-  ALWAYS SUPPORT FIXTURE BY MORE THEN ONE POINT. NEVER LIFT FIXTURE BY ONLY ONE END
-  NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

INSTALLATION STEPS:

1. Mount the couplers to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling (Fig. 1 and Table 1).

PLEASE ENSURE THAT THE FASTENERS ARE INSTALLED ON THE STUD/JOIST OR ANY SUPPORTING STRUCTURE OF THE CEILING. THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY FROM AN OUTLET BOX.

2. Pass the aircraft cables through the caps (Fig. 2).  
3. Fasten the caps to the couplers.  
4. Lift the fixture and attach the loose ends of the three aircraft cables to the cable gliders (Fig. 3).  
5. Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple /finial assembly provided (Fig. 4).  
6. Level the fixture using the cable gliders.  
7. Insert diffusers textured side down by slightly twisting and lifting into place.


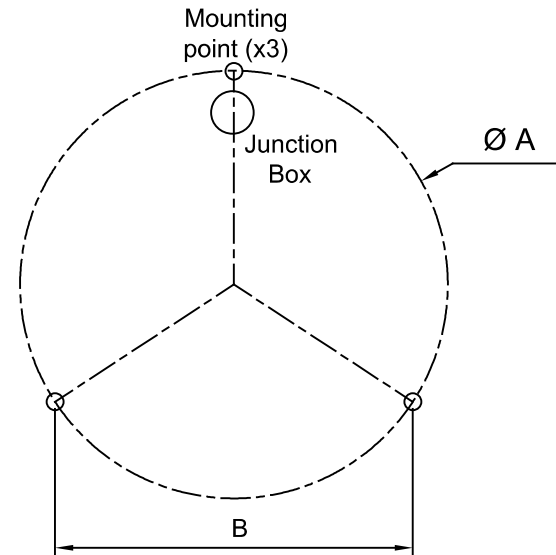


Fig. 1

Table 1

	A	B
RING 3 2FT	22.8" [579mm]	19.8" [502mm]
RING 3 3FT	34.2" [869mm]	29.6" [752mm]
RING 3 4FT	46.2" [1173mm]	40" [1016mm]
RING 3 5FT	58.2" [1478mm]	50.4" [1280mm]
RING 3 6FT	70.2" [1783mm]	60.8" [1544mm]

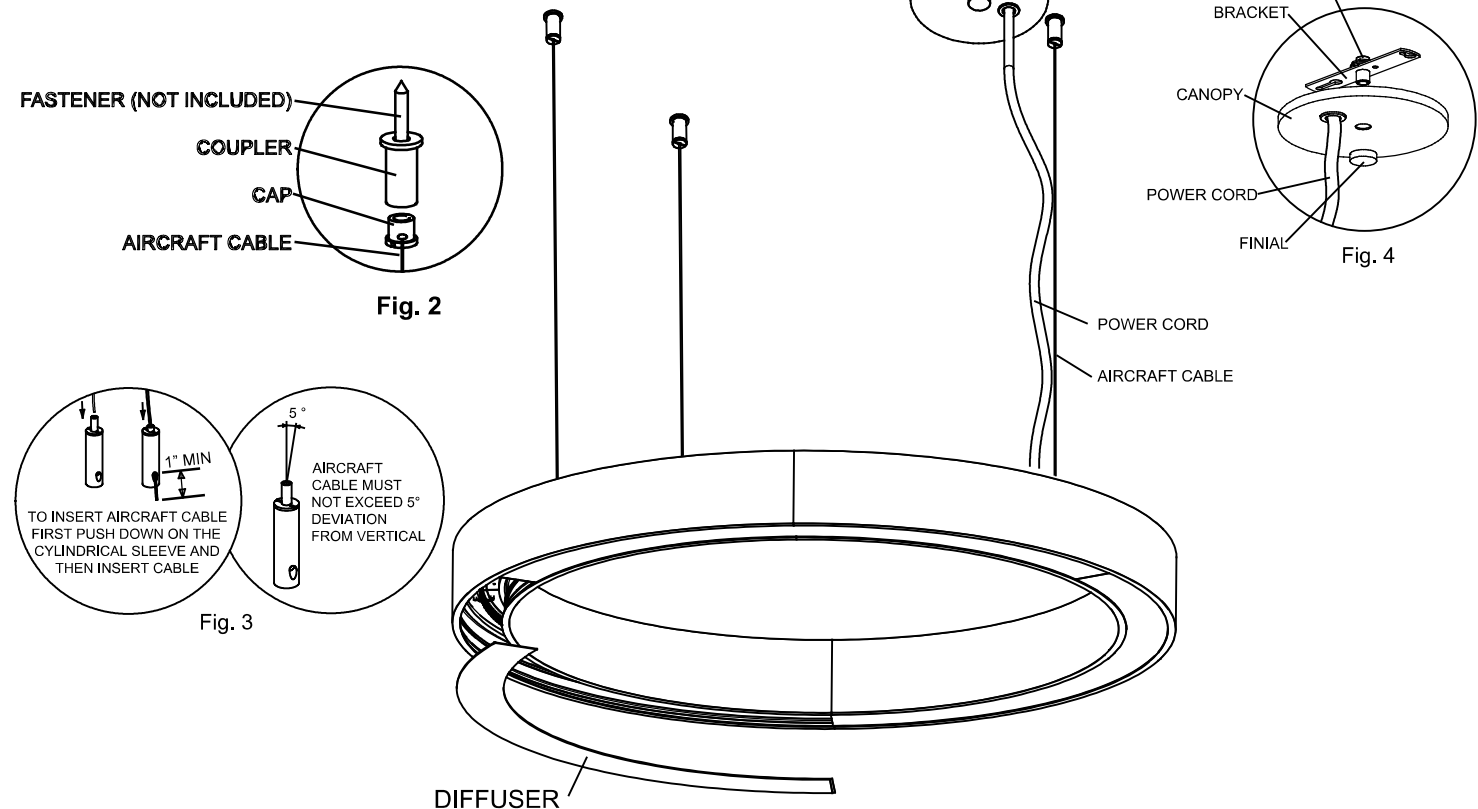

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: RING 3 PD, RGTP1P02 - RGTP1P06, RGTP2P02 - RGTP2P06

BETA-CALCO INC. 25 Kodiak Crescent, TORONTO ONTARIO CANADA M3J 3E5

