




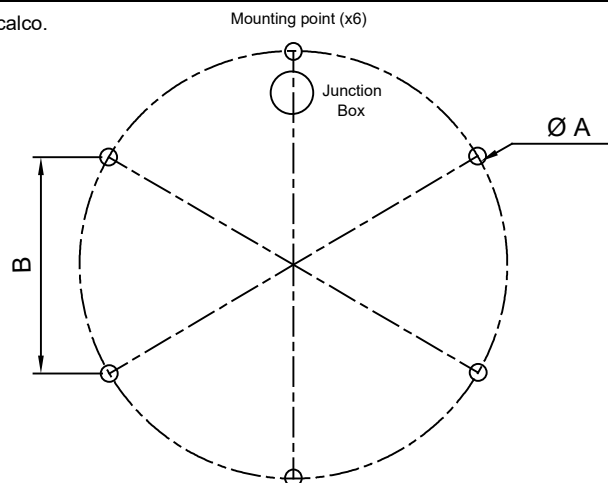
- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

Fixture comes partially assembled

-  PLEASE ENSURE ELECTRICAL CIRCUIT IS DISCONNECTED BEFORE INSTALLATION
-  ALWAYS SUPPORT FIXTURE BY MORE THEN ONE POINT. NEVER LIFT FIXTURE BY ONLY ONE END
-  NEVER TOUCH THE YELLOW PORTION OF THE LED CHIP OR DAMAGE MAY OCCUR

INSTALLATION STEPS:

1. Mount the couplers (x6) to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling (Fig. 1)
PLEASE ENSURE THAT THE FASTENERS ARE INSTALLED ON THE STUD/JOIST OR ANY SUPPORTING STRUCTURE OF THE CEILING. THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY FROM AN OUTLET BOX.
2. Pass the aircraft cables through the caps (Fig. 2).
3. Fasten the caps to the couplers.
4. Start with the section that has the power cord.
5. Remove top covers, lift the section and attach the loose ends of the two aircraft cables to the cable gliders (Fig. 3).
6. Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple /finial assembly provided (Fig. 4).
7. Level the section using the cable gliders.
8. Insert 3x diffusers textured side down by sliding into the end of the section (ensure diffuser overlaps are in the correct orientation). IT IS IMPORTANT TO INSTALL DIFFUSERS BEFORE CONNECTING SECTIONS TO EACH OTHER (Fig. 5).
9. Using the labels near the ends of sections as a guide, lift the next section (repeat steps 5, 7 and 8).
10. Fasten sections together using the alignment plates and the connection brackets (Fig. 6). Please use separate "RING-SQUIGGLE-MACRO - CONNECTION INSTRUCTIONS" for the connection details.
11. Insert 3x diffusers (see step 8).
12. Repeat steps 5, 8-11 for other sections.
13. Re-install top covers.
14. Re-check the level of the entire fixture and adjust aircraft cables as nessesary. Trim excess aircraft and power cables (Fig. 3).
15. Use supplied silicone and plastic knife to cover the inside the joints between sections to prevent light leaks.



	A	B
RING 3 8FT	91.2" [2316mm]	45.6" [1158mm]
RING 3 9FT	103.2" [2621mm]	51.6" [1310mm]

Fig. 1

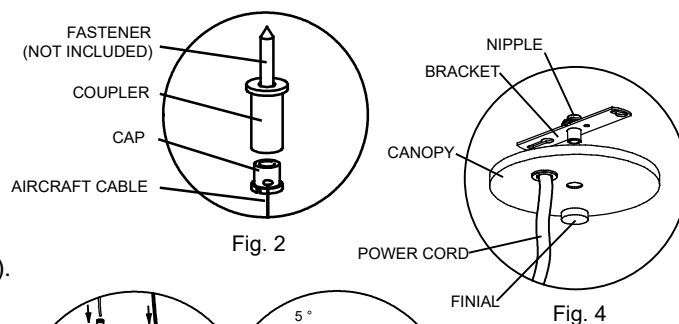


Fig. 2

Fig. 4

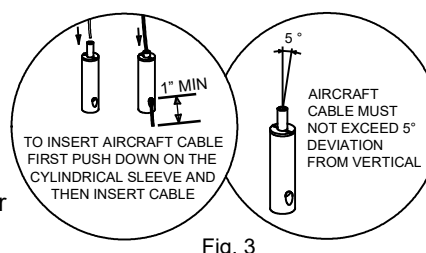


Fig. 3

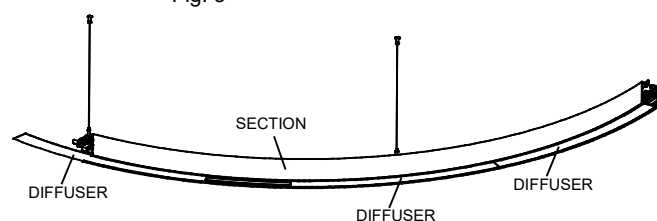


Fig. 5


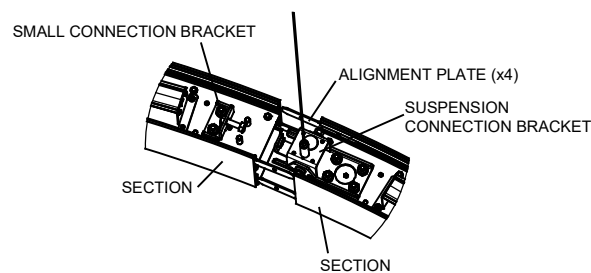


Fig. 6

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: RING 3 PD, RGTP1P08, RGTP2P08, RGTP1P09, RGTP2P09

BETA-CALCO INC. 25 Kodiak Crescent, TORONTO ONTARIO CANADA M3J 3E5

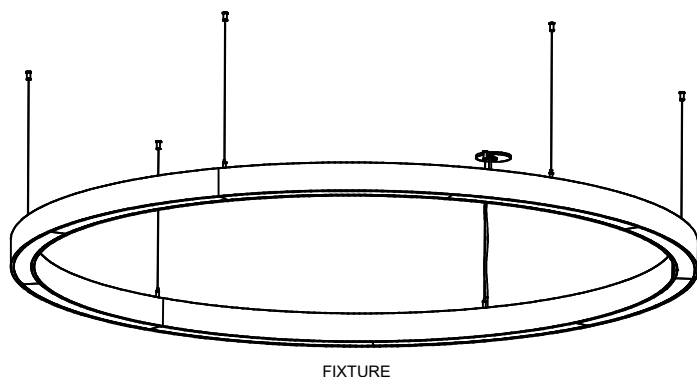