


1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.
6. Fixture comes partially assembled.

INSTALLATION STEPS:

1. Mount canopy backplate over junction box (canopy must be anchored directly to ceiling).
2. Insert aircraft cables into the cable gliders on the hub (Fig. 1).
3. If the hub is not already connected to the fixture, fasten the aircraft cables to the suspension brackets using supplied 1/4-20 screws and nuts (Fig. 2)
4. Ensure that the aircraft cables and power cord are passing through the canopy and hub cover, and suspend the fixture by threading bolt on canopy backplate through the aircraft cable loops, secure with included nut.
5. Adjust height of the fixture and trim excess aircraft and power cables (ensure that the power cable is passing through the center of the hub and the canopy).
6. Make all necessary electrical connections, lift canopy cover into position and secure with 3x screws.
7. Insert diffusers by slightly twisting and lifting into place (textured side facing down).

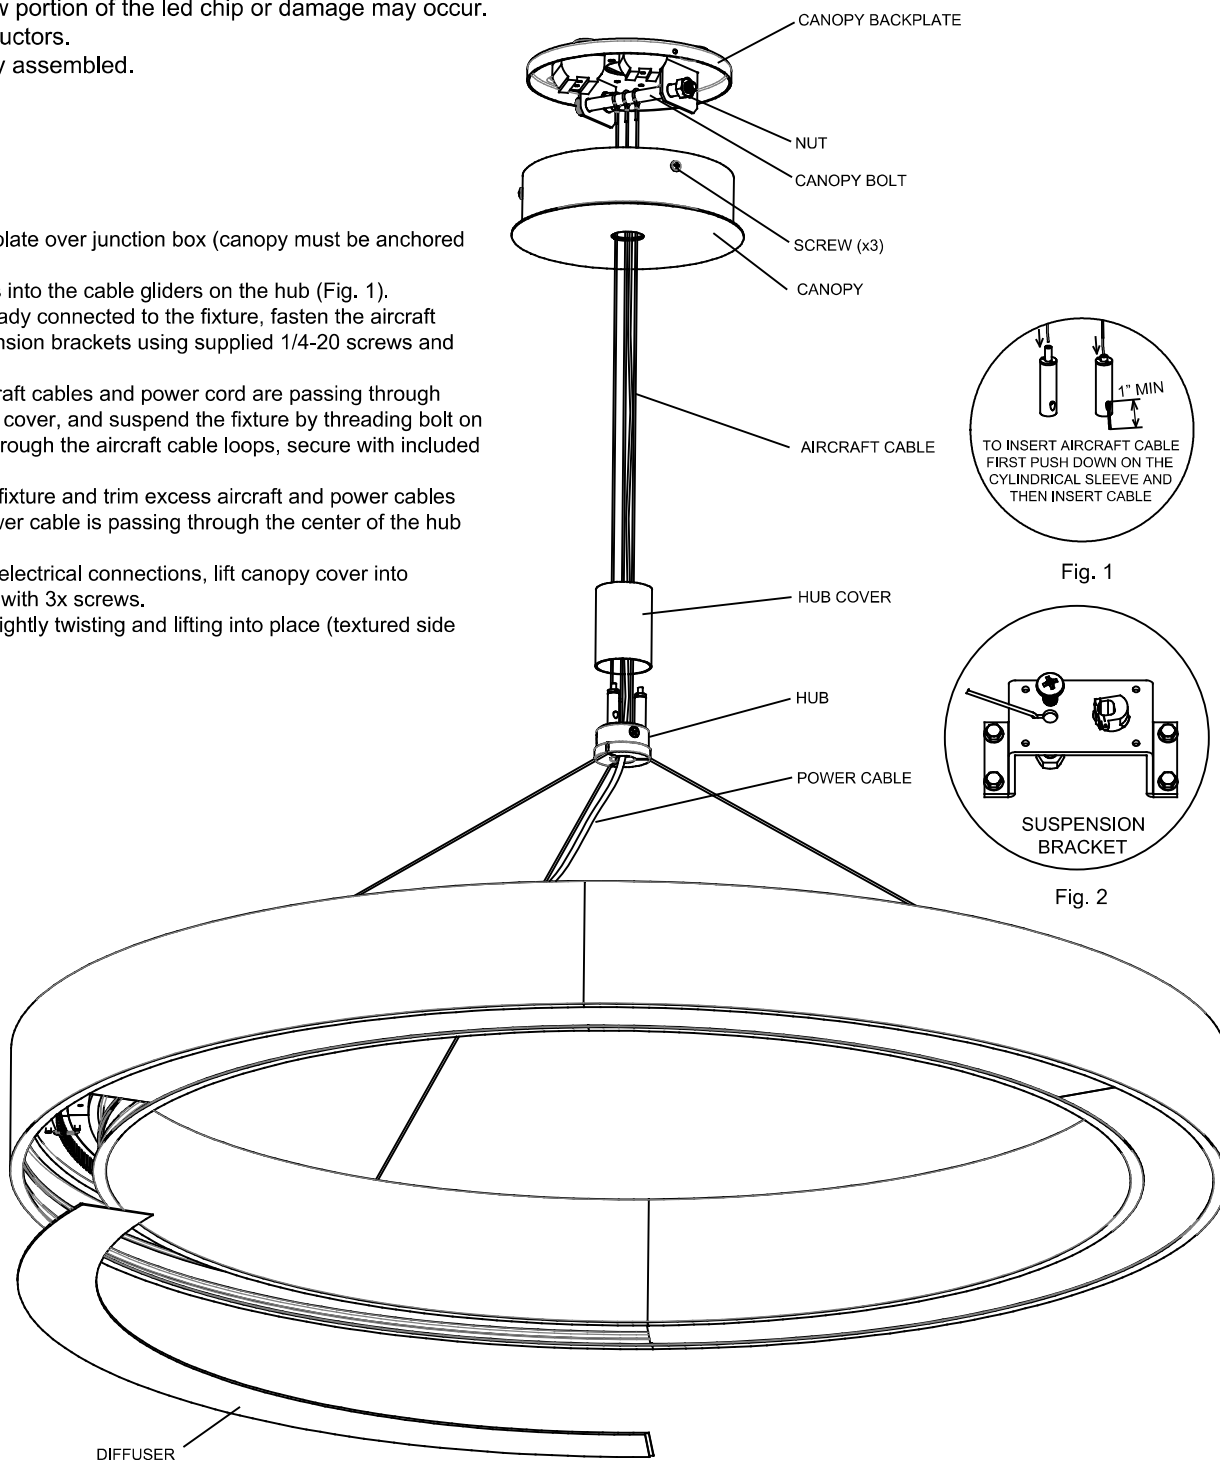

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: RING 3 PD: RGTP1P02 - RGTP1P07, RGTP2P02 - RGTP2P07

BETA-CALCO INC. 25 Kodiak Crescent, TORONTO ONTARIO CANADA M3J 3E5