PAGE 1 OF 2


FIXTURE COMES PARTIALLY ASSEMBLED.



Ensure electrical circuit is disconnected before installation.




Luminaires must be installed in accordance with national electrical code and local regulation.

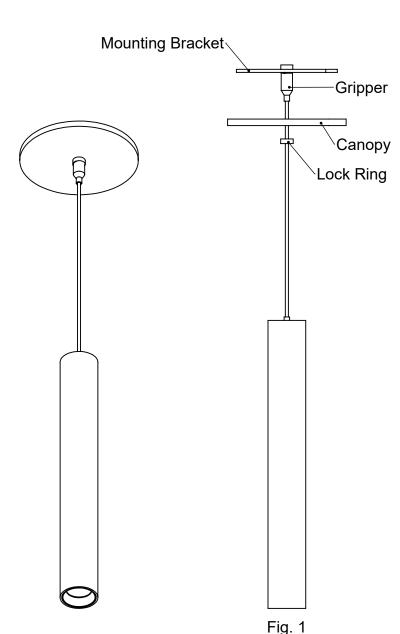


- 1. Attach mounting bracket to the ceiling using appropriate fasterners (not included).
- 2. Secure gripper to mounting bracket using the nut.
- 3. Pass the power over aircraft cable through the gripper.
- 4. Make all necessary eletrical connections, lift the canopy into position and secure it with the canopy ring (see Fig. 1).

Note: The canopy is used to cover the branch circuit/junction box.

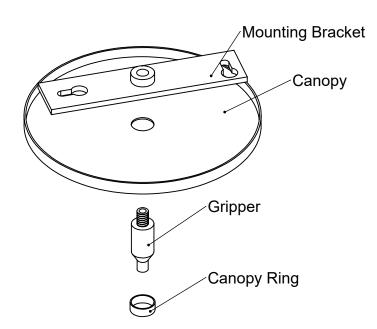


PAGE 2 OF 2

Integral Driver Installation



- Make all necessary eletrical connections. Remove film from back of the driver. 1.
- 2.
- 3. Place driver inside the junction box.

Remote Box Installation

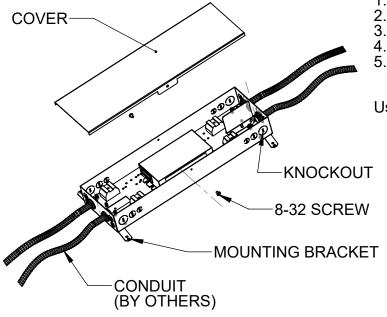

- Remove the 2x 8-32 screws and the remote box cover 1.
- Remove the necessary knockouts Attach the conduits "NOT SUPPLIED"
- Make all necessary electrical connections
- Re-attach the cover and secure it with the supplied screws

Use the mounting brackets to secure the box in place.