

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

5. The power can safely be turned on now.

CONTINUOUS FIXTURE INSTALLATION:

6. Start from the first section with the power box. Repeat steps 1, 2, 3 and 4.


7. Raise the next section above the ceiling and lower it onto the T-bars.

8. Make the wiring connection between both sections using connectors.

9. Join both sections together by sliding the section into the guiding plates (x2) on the installed section and fastening four screws and lock washers.


10. Attach safety wires to the section tabs.

11. When all sections of the fixture are installed, the power can safely be turned on .

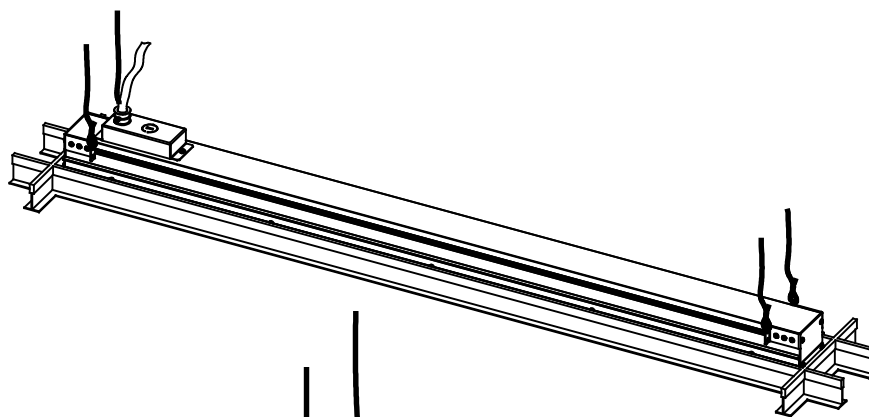


FIXTURE SECTION

FIXTURE SECTION

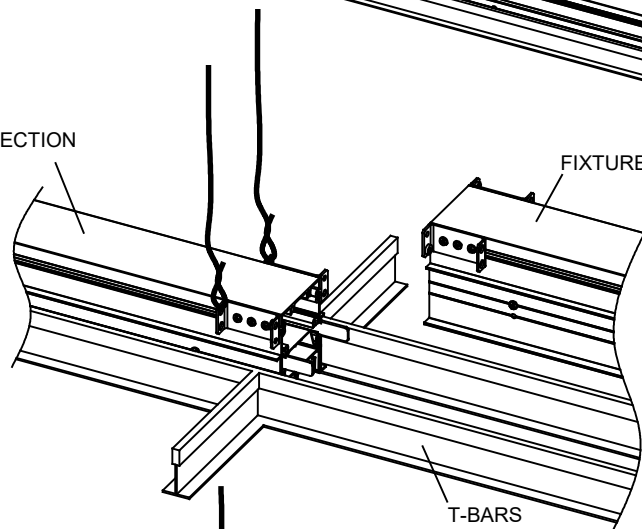


T-BARS

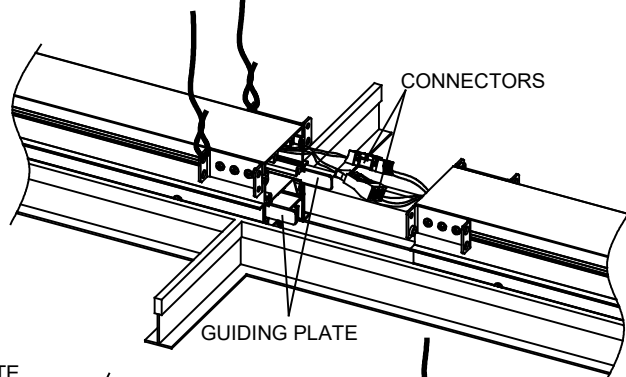

CONNECTORS


GUIDING PLATE

GUIDING PLATE



LOCK WASHER (x4)

SCREW (x4)

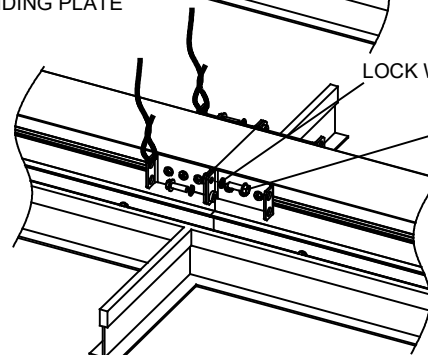

SAFETY WIRE

TAB

