

FIXTURE COMES PARTIALLY ASSEMBLED.



PLEASE ENSURE ELECTRICAL CIRCUIT IS
DISCONNECTED BEFORE INSTALLATION.



NEVER TOUCH THE YELLOW PORTION OF
THE LED CHIP OR DAMAGE MAY OCCUR.

1. Attach surface mounting plates to the ceiling,
making sure to align the cutout over the switchbox.
(See FIG 1)

2. If there are multiple surface mounting plates, **LEAVE
NO SPACE BETWEEN PLATES AND ENSURE SPRINGS
SPACING BETWEEN PLATES IS EQUAL** . (See FIG 2)

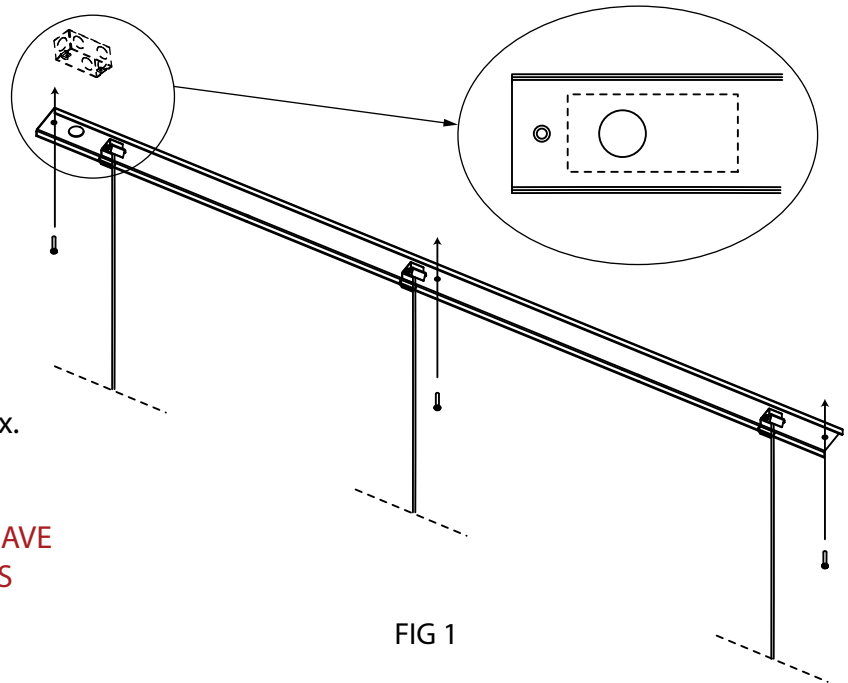


FIG 1




FIG 2

3. Push fixture up to surface mount plate assembly
on the ceiling till a "Snap" is felt, indicating the
springs are mated with the fixture


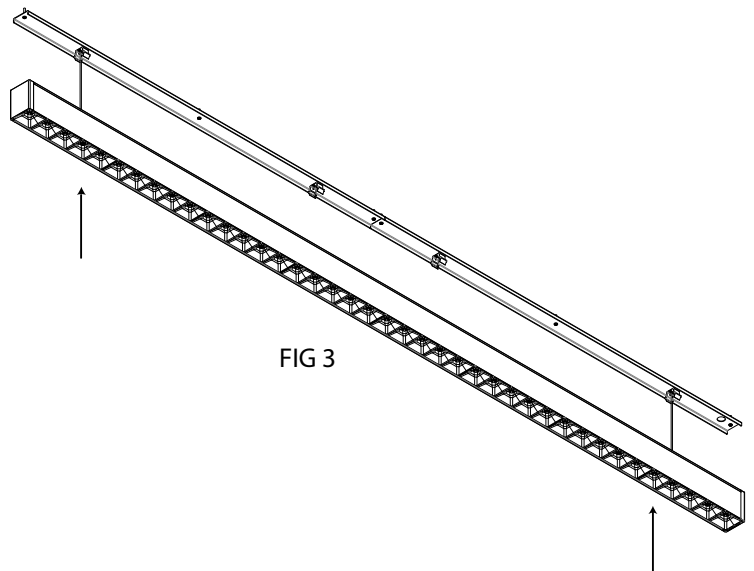


FIG 3

4. In the event integral EM is chosen; access the
the drivers and switch each driver to 'ON'
position before plugging into power.

DIRECTION OF ASYMMETRIC BEAM (DD1)
(DIRECTION WILL ALSO BE LABELLED ON FIXTURE)



TOP VIEW

