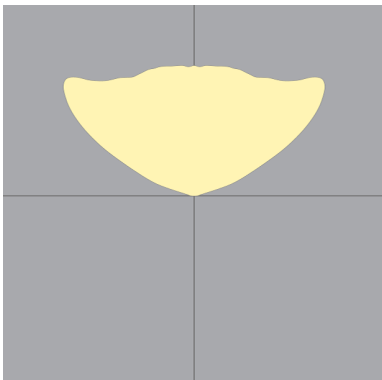
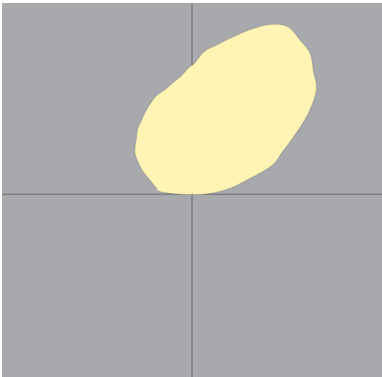


b SPECTIVE - SUSPENDED

PERFORMANCE DATA (CCT: 4000K, CRI: 90+)

DIRECT	LUMENS/FT	WATTS/FT	LPW
	600	6	104
	400	4	109
	200	2	116

INDIRECT BATWING	LUMENS/FT	WATTS/FT	LPW
	1400	12	116
	1200	10	119
	1000	8	122
	800	6	127
	600	5	131
	400	3	137
	200	2	144

INDIRECT ASYMMETRIC	LUMENS/FT	WATTS/FT	LPW
	1000	12	82
	800	10	85
	600	6	89
	400	5	92
	200	2	96