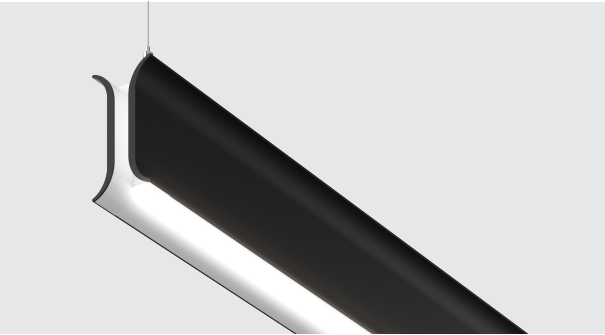
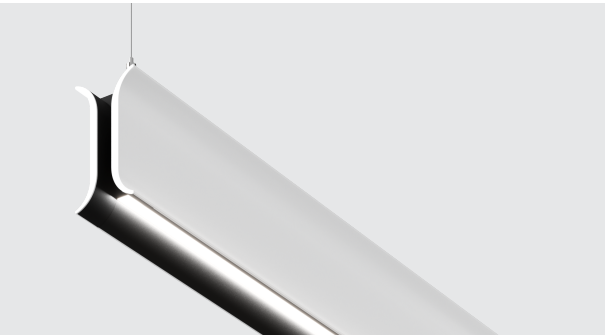
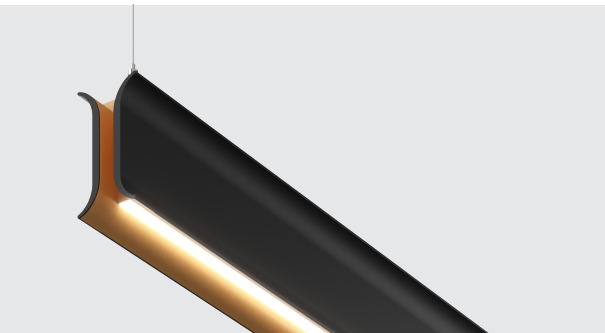


b MICRO FLARE - SUSPENDED


PERFORMANCE DATA (CCT: 4000K, CRI: 90+)


INSIDE PANEL - DIRECT (WHITE)	LUMENS/FT	WATTS/FT	LPW
	400	5	94
	300	4	97
	200	2	101
	100	1	109
INSIDE PANEL - DIRECT (BLACK)	LUMENS/FT	WATTS/FT	LPW
	400	5	82
	300	4	84
	200	2	87
	100	1	94
INSIDE PANEL - DIRECT (GOLD)	LUMENS/FT	WATTS/FT	LPW
	400	5	89
	300	4	91
	200	2	95
	100	1	103

b

MICRO FLARE - SUSPENDED

PERFORMANCE DATA (CCT: 4000K, CRI: 90+)

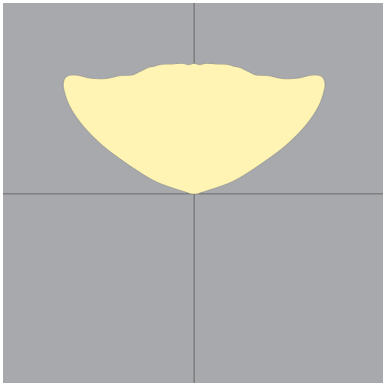INDIRECT BATWING	LUMENS/FT	WATTS/FT	LPW
	1400	12	116
	1200	10	119
	1000	8	122
	800	6	127
	600	5	131
	400	3	137
	200	2	144

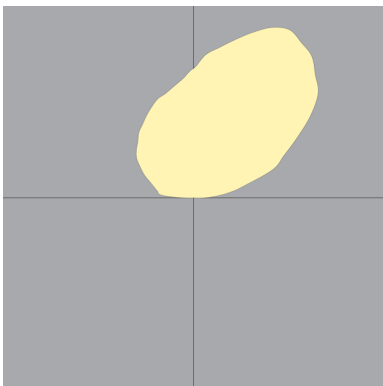INDIRECT ASYMMETRIC	LUMENS/FT	WATTS/FT	LPW
	1000	12	82
	800	10	85
	600	6	89
	400	5	92
	200	2	96