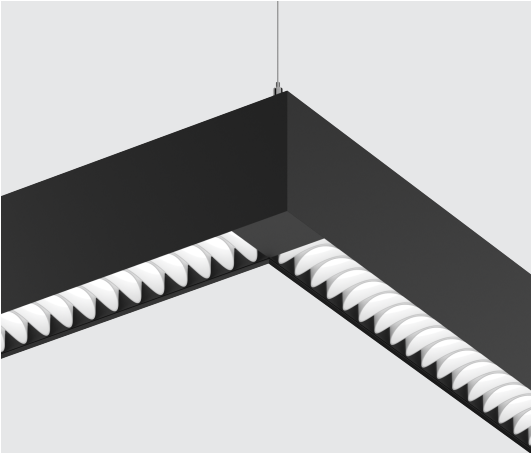
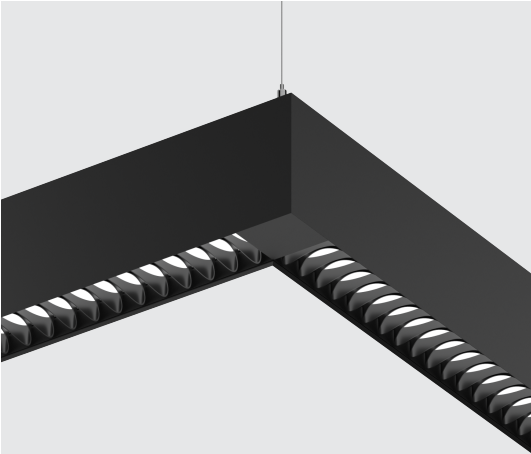
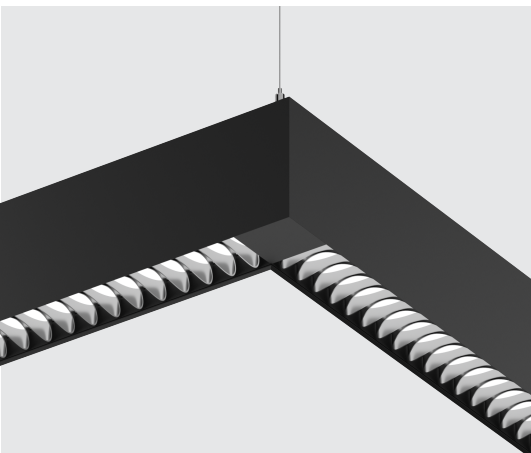


OOOOH SYSTEMS - SUSPENDED

PERFORMANCE DATA (CCT: 4000K, CRI: 80+)

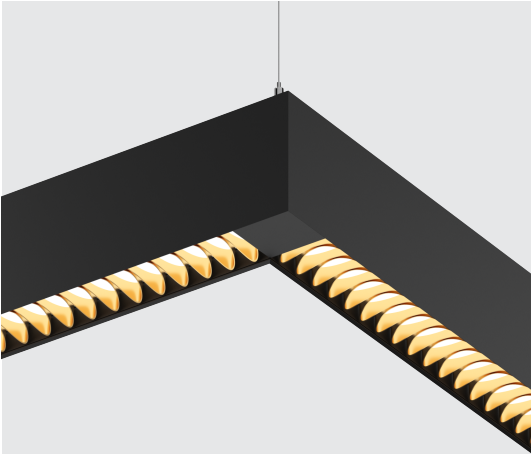
WHITE (LV3 - DD4)	LUMENS/FT	WATTS/FT	LPW
	1300	13	106
	1200	11	108
	1000	9	110
	800	7	114
	700	6	115
	600	5	117
	500	4	119
	400	3	121
	300	3	126
	200	2	128

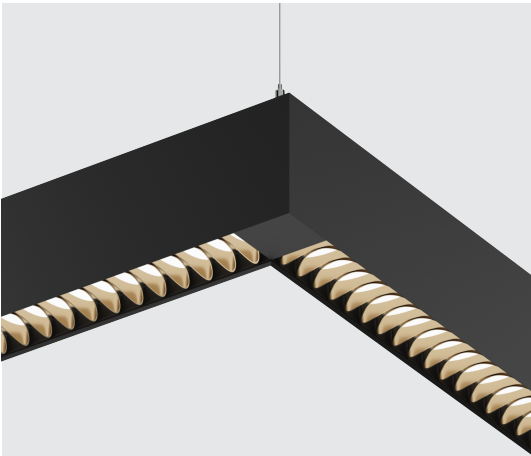
BLACK	LUMENS/FT	WATTS/FT	LPW
	700	13	57
	600	11	58
	500	9	59
	400	7	61
	300	5	63
	200	3	65

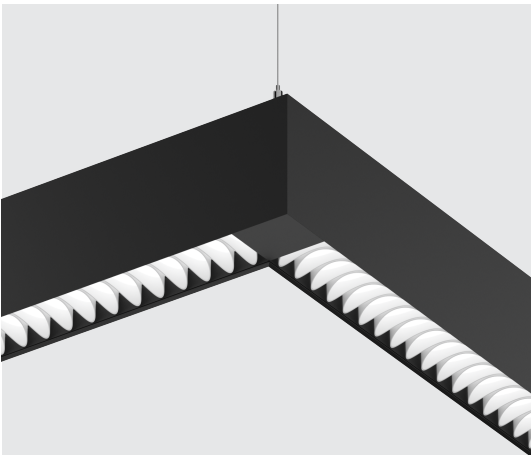
SATIN CHROME	LUMENS/FT	WATTS/FT	LPW
	1000	13	84
	800	9	87
	700	9	89
	600	7	90
	500	5	93
	400	4	95
	300	3	95
	200	2	98

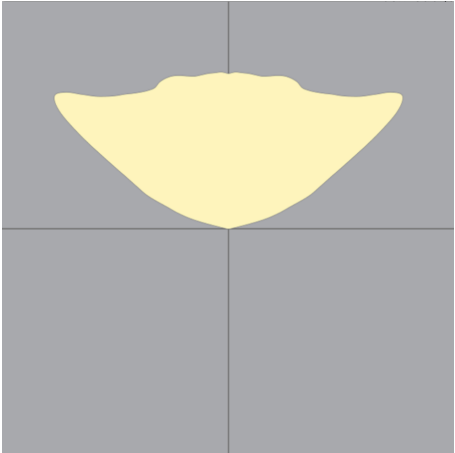
b OOOOH SYSTEMS - SUSPENDED

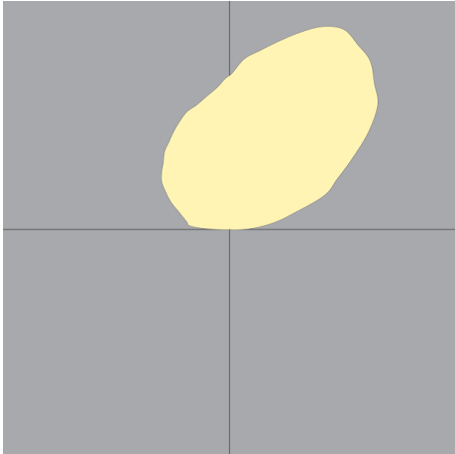
PERFORMANCE DATA (CCT: 4000K, CRI: 80+)

SATIN GOLD	LUMENS/FT	WATTS/FT	LPW
	1000	13	82
	800	9	85
	700	9	87
	600	7	88
	500	5	91
	400	4	93
	300	3	93
	200	2	96

SATIN CHAMPAGNE	LUMENS/FT	WATTS/FT	LPW
	1000	13	84
	800	9	87
	700	9	89
	600	7	90
	500	5	93
	400	4	95
	300	3	95
	200	2	98

WHITE (LV3 - DD1)	LUMENS/FT	WATTS/FT	LPW
	1200	13	100
	1000	11	101
	800	9	105
	700	7	107
	600	6	108
	500	5	110
	400	4	112
	300	3	113
	200	2	116

INDIRECT BATWING	LUMENS/FT	WATTS/FT	LPW
	1600	13	133
	1400	10	138
	1200	9	141
	1000	7	145
	800	6	147
	600	4	151
	400	3	154
	200	1	154

INDIRECT ASYMMETRIC	LUMENS/FT	WATTS/FT	LPW
	1200	13	97
	1000	10	100
	800	9	102
	600	6	107
	400	4	109
	200	2	112