


1 OPEN PLAN OFFICE SPACE

Inside Panel (Gold Metallic) with 200 lms/ft direct and 400 lms/ft indirect


Room Size:	50'x50'	Workplane 30" above finished floor (fc level)	49
Ceiling height:	10'	Workplane uniformity max to min	1.3:1
Luminaire mounting height:	8'5"	Ceiling uniformity maximum to minimum	5:1
Reflectances:	80/50/20	*UGR average	12
Light loss factor:	1.0	Watt sq/ft	0.46

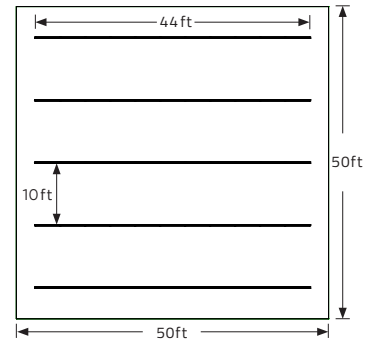

2 SINGLE OFFICE SPACE

Inside Panel (Black Metallic Textured) with 300 lms/ft direct and 400 lms/ft indirect


Room Size:	10'x10'	Workplane 30" above finished floor (fc level)	33
Ceiling height:	10'	Ceiling uniformity maximum to minimum	3.1:1
Luminaire mounting height:	8'5"	*UGR average	11
Reflectances:	80/50/20	Watt sq/ft	0.52
Light loss factor:	1.0		

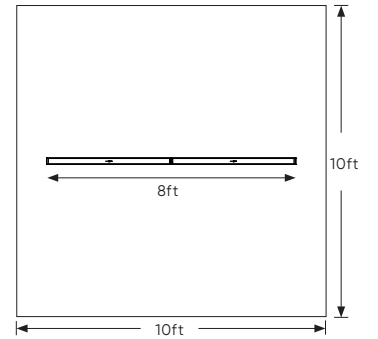

3 CONFERENCE ROOM

Inside Panel (Gold Metallic) with 300 lms/ft direct and 400 lms/ft indirect

Room Size:	12'x 20'	Workplane 30" above finished floor (fc level)	34
Ceiling height:	10'	*UGR average	14
Luminaire mounting height:	8'	Watt sq/ft	0.32
Reflectances:	80/50/20		
Light loss factor:	1.0		

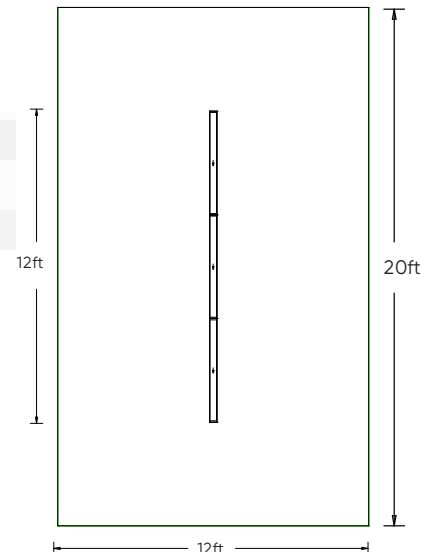

*In AGI32, all calculated UGR values of less than 10 are rounded to 10.