



BETACALCO


LINEAR
&
EXTERIOR




Linear & Exterior Lineup




LINEAR

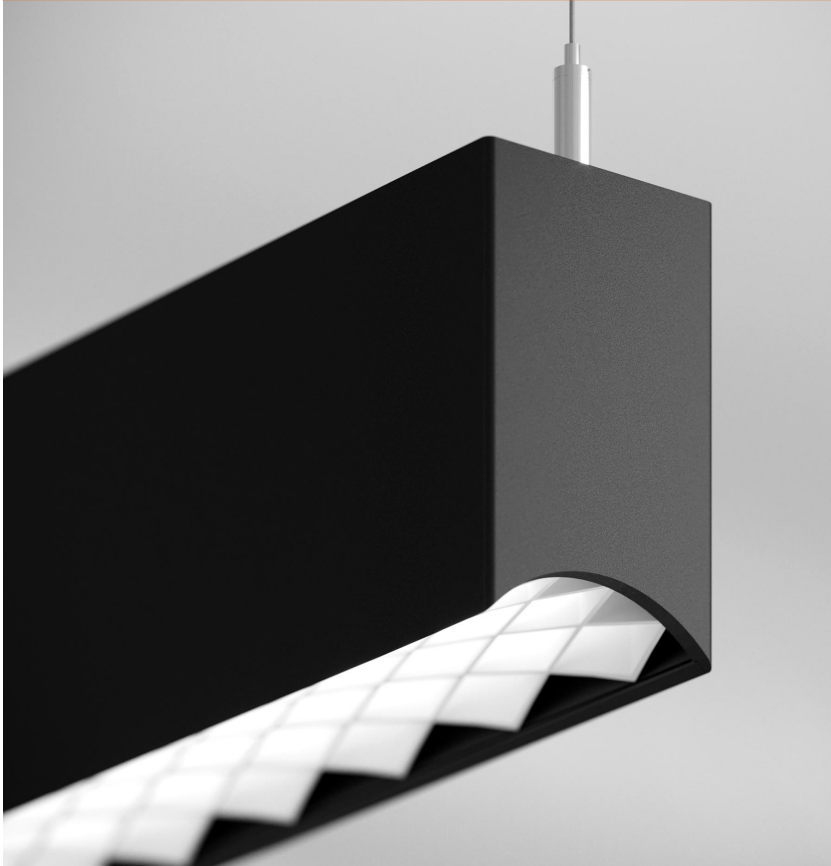

EXTERIOR

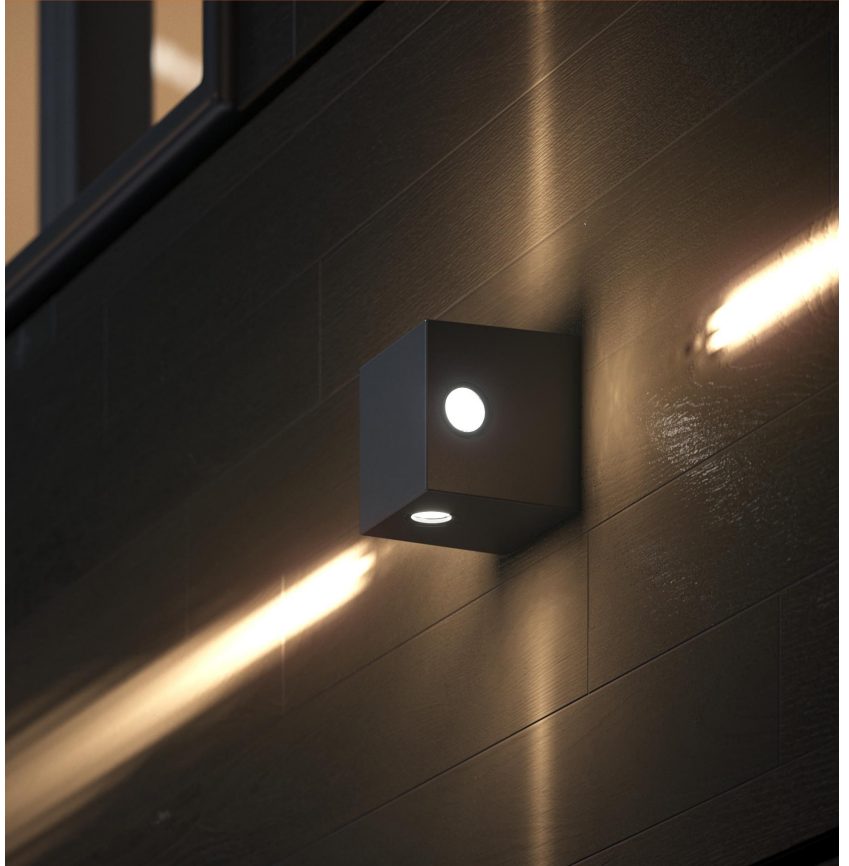

Linear

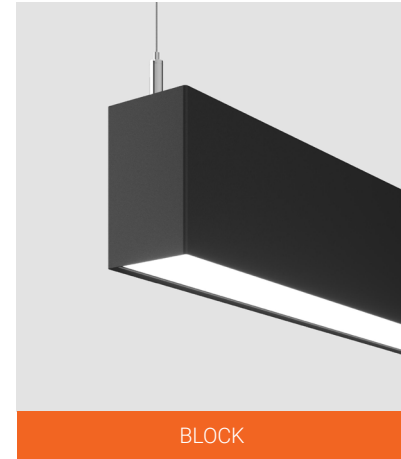

PENDANT | RECESSED



Le Louvre Louver Options



Louver Finishes:	Frosted	Satin Chrome	Satin Champagne	Satin Gold	Black
UGR Glare Rating:	<19	<13	<13	<13	<9
Lumens/Ft up to:	3000	2400	2400	2400	2100
LPW up to:	141	114	114	113	100

Le Louvre Specifications



4
Section
Lengths

CRI

Dimensions






UPLIGHT
(batwing distribution)



DIRECT
(asymmetric distribution)




DOWNLIGHT
(visual comfort and reduced glare)

Le Louvre Distribution Pattern



High efficiency custom lens provides **batwing** distribution with minimal losses

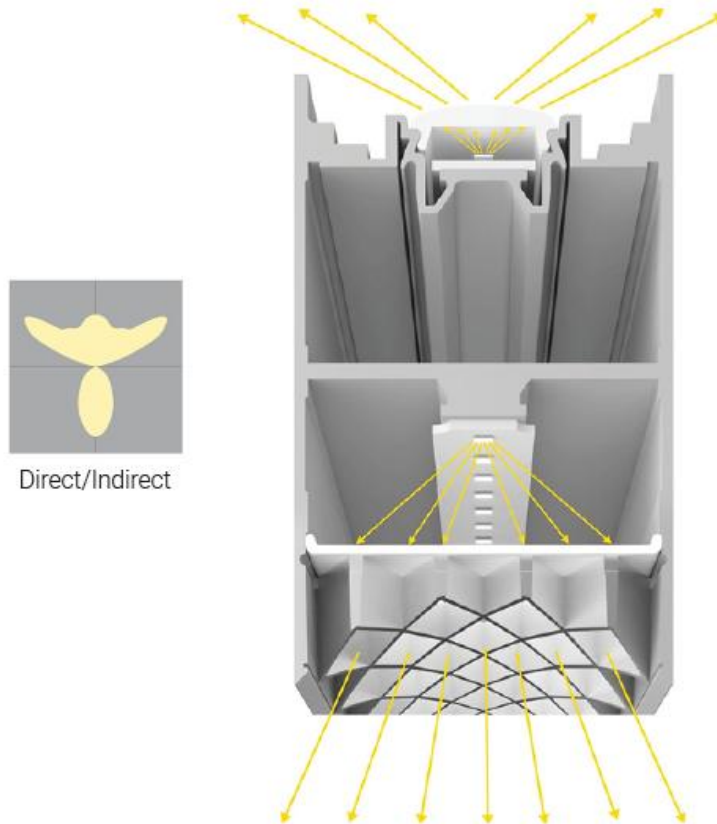

Injection molded louver provides precise optical control limiting glare from the luminaire

Le Louvre Continuous Run Connection



Solid Simplistic connection mechanism



Creates a seamless joint with zero light leak



No Sensor



Enlighted



Osram Encellium



Philips









Le Louvre Suspension



Le Louvre Uplight Blackout Plate






- | | | | |
|---|---------------------------------|---|---------------------------|
|  | White |  | Black Metallic Textured |
|  | Silver Metallic Textured |  | Red Metallic Textured |
|  | Gold Metallic |  | Copper Metallic |
|  | Midnight Blue Metallic Textured |  | Champagne Metallic |
|  | Charcoal Metallic Textured |  | Wood Grain - Light Cherry |
|  | Bronze Metallic Textured |  | Wood Grain - Dark Walnut |

Le Louvre Application Shot






Le Louvre Recessed Louver Options

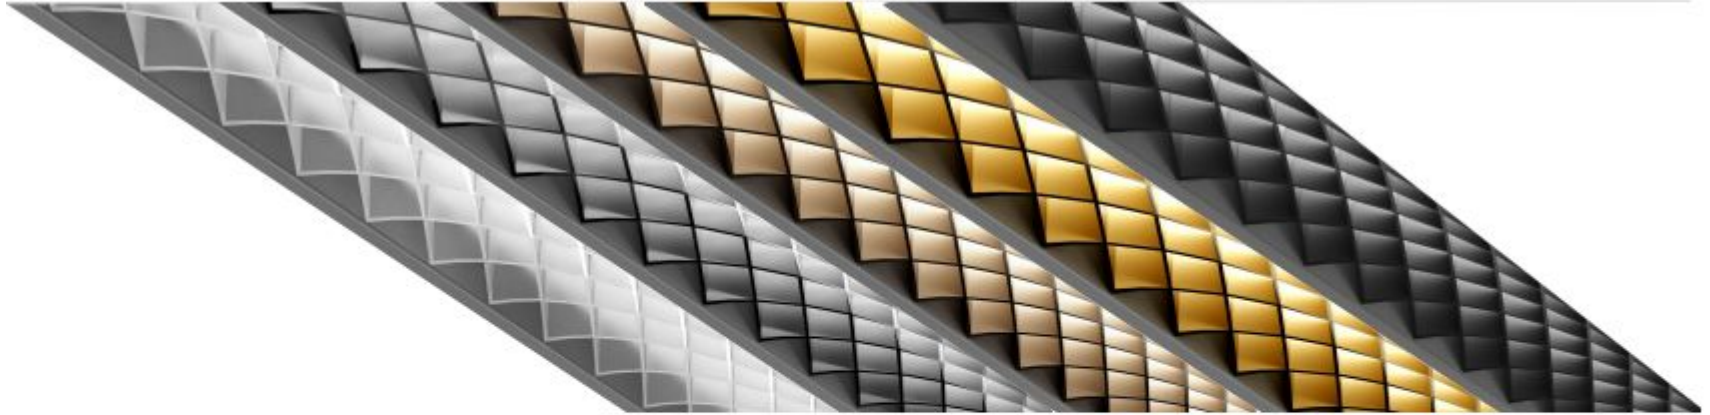

Louver Finishes:	Frosted	Satin Chrome	Satin Champagne	Satin Gold	Black
UGR Glare Rating:	<19*	<19	<19	<19	<15
Lumens/Ft up to:	1360	820	800	820	530
LPW up to:	130	75	73	75	50

Le Louvre Recessed Lighting Distribution Pattern

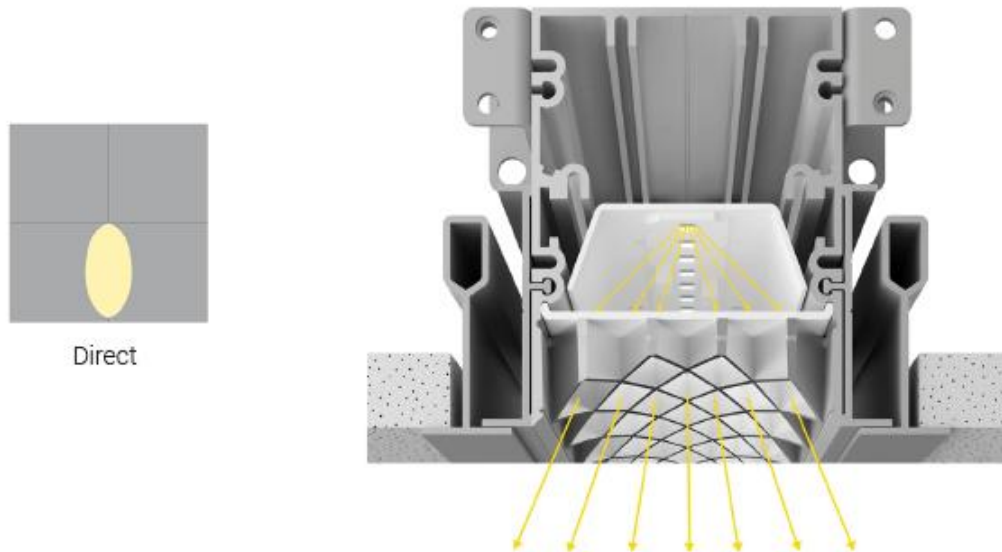

Injection molded louver provides precise optical control limiting glare from the luminaire


Le Louvre Recessed Ceiling Options



GRID CEILING




Tegular Ceiling

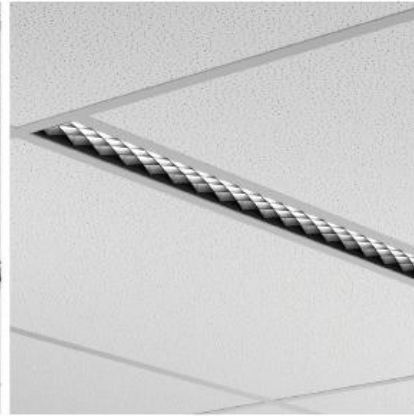


T-Bar Ceiling

HARD CEILING

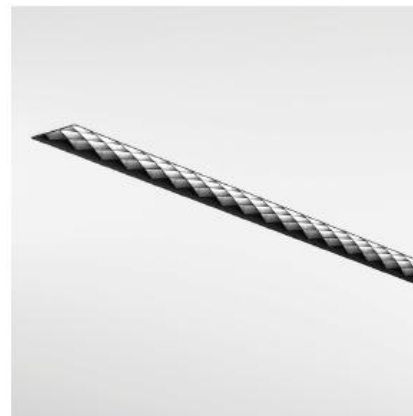

Trimless

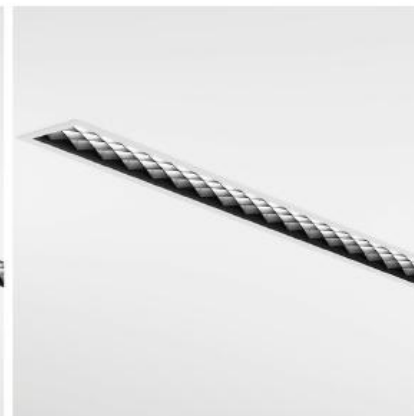

Trim - White

Le Louvre Recessed Application Shot



Tunnel



Tunnel Application Shot



Tunnel Specifications



Direct
Diffuser
Options


Lms/ft
up to 2K

3
Sensors

2
Ceiling
Types




Tunnel Finishes

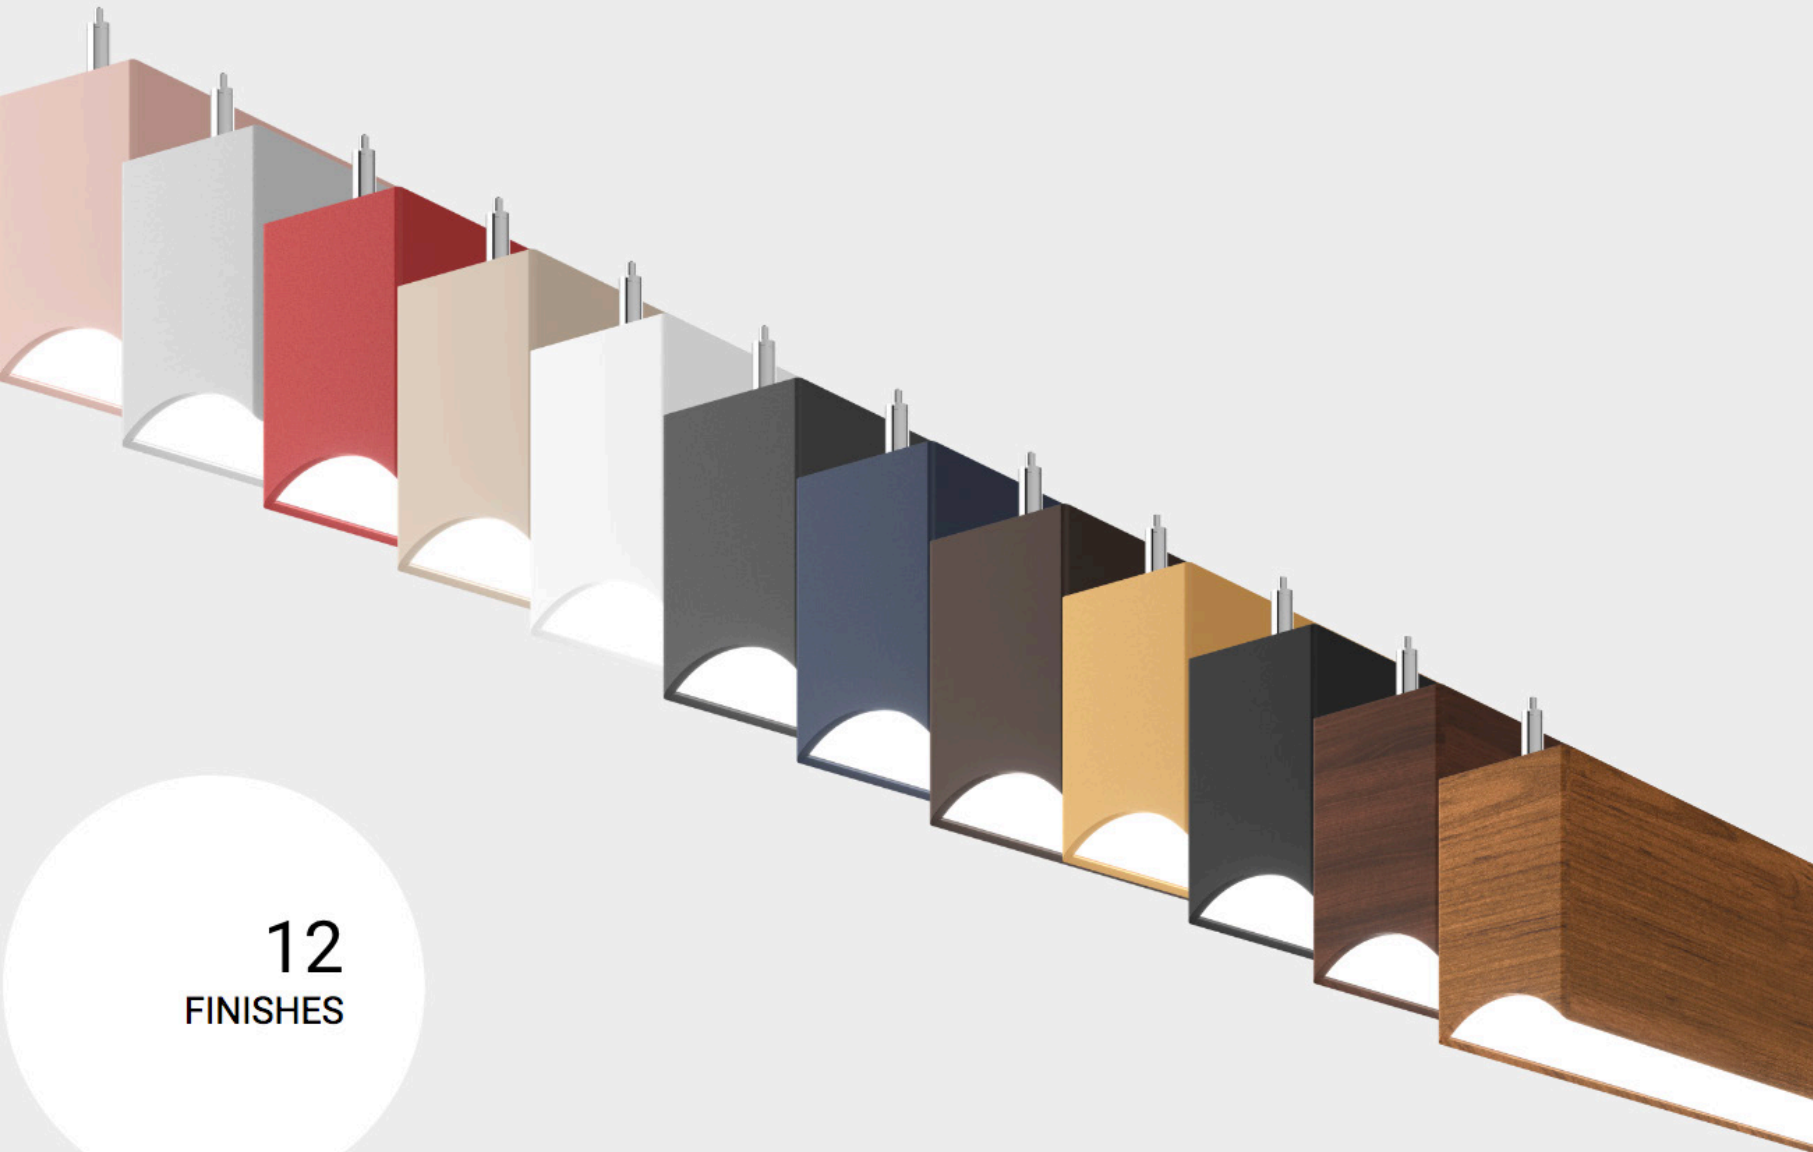

12
FINISHES

Tunnel Recessed

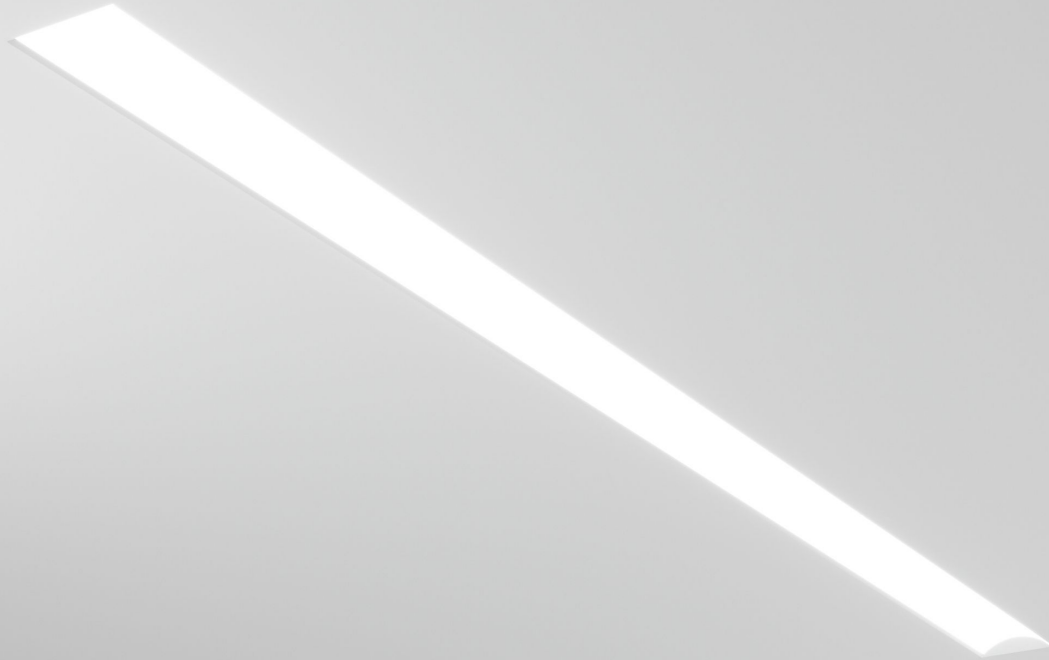

Tunnel Recessed Application Shot



Tunnel Recessed Specifications



Direct
Diffuser
Options

Lumens
per foot
1400

3
Sensors


2
Ceiling
Types



Tunnel Recessed Application Shot



Block

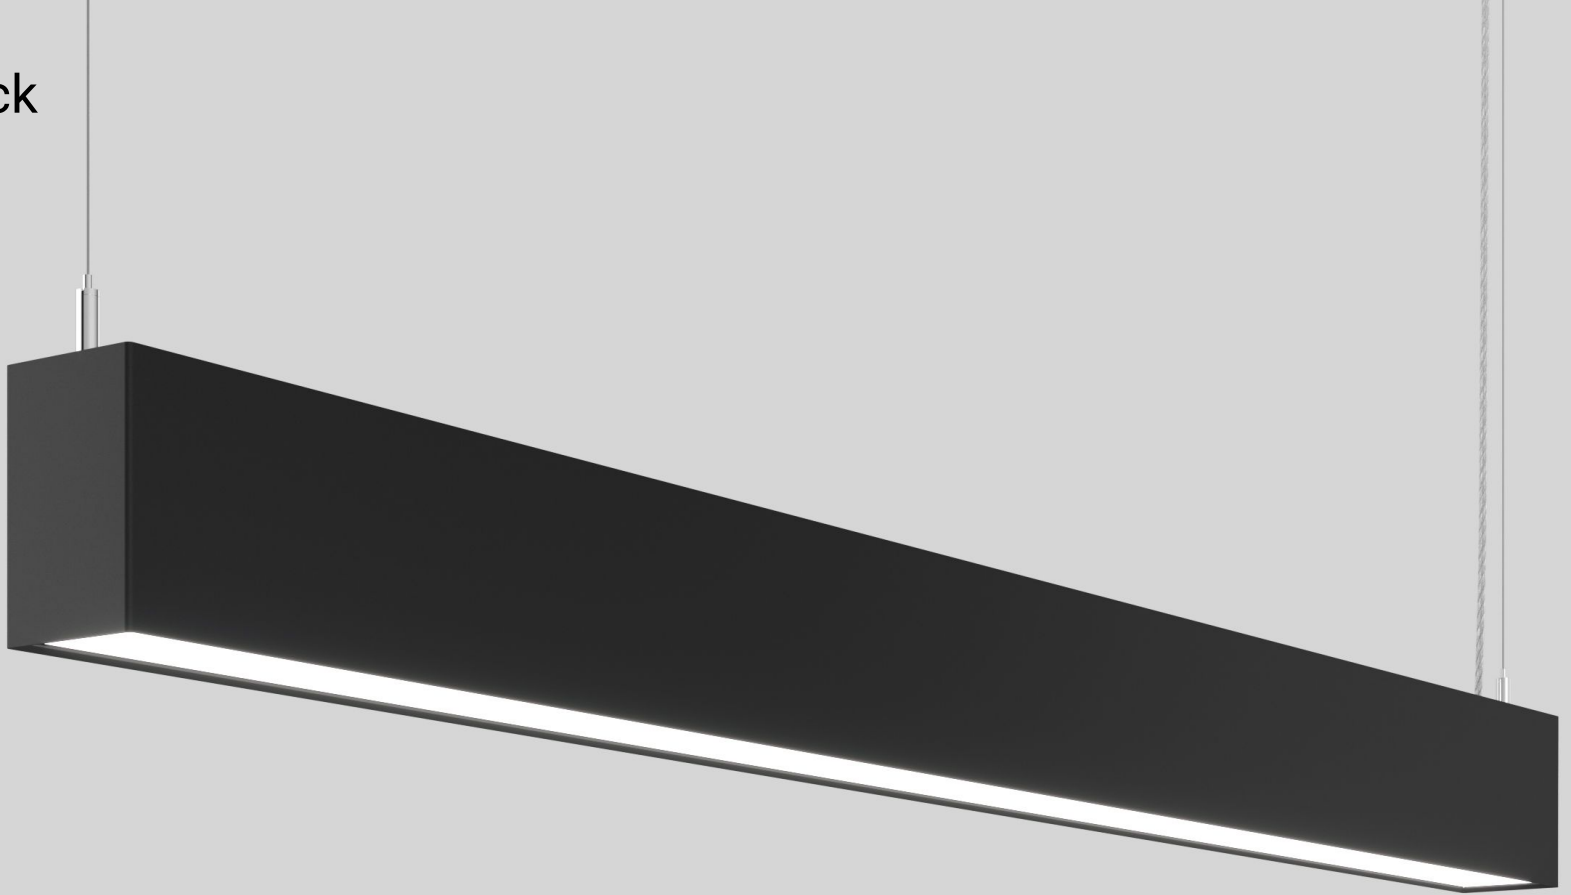

Block Application Shot



Block Specifications



Direct
Diffuser
Options

Lumens
per foot
2000

3
Sensors

2
Ceiling
Types



Block Application Shot



Block Finishes



12

FINISHES

Block Recessed



Block Application Shot



Block Specifications




Lumens
per foot
1000

Direct
Diffuser
Options

3
Sensors

2
Ceiling
Types

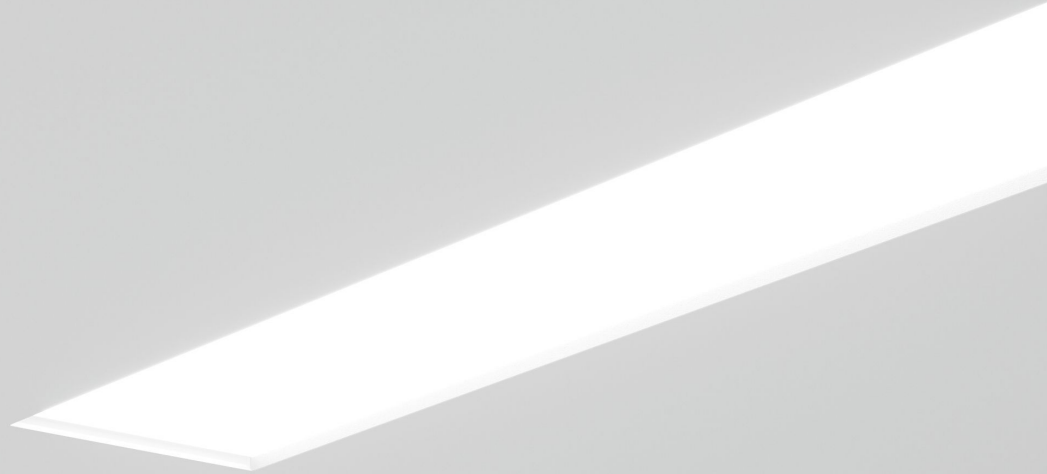

Exterior



RAZER RD



RAZER SQ



RAZER CUBE



FRAMED



SENTINEL



SENTINEL II



SENTINEL III



RAZER RD



RAZER SQ



RAZER CUBE




Razer SQ




Razer Cube



Razer Beam Options

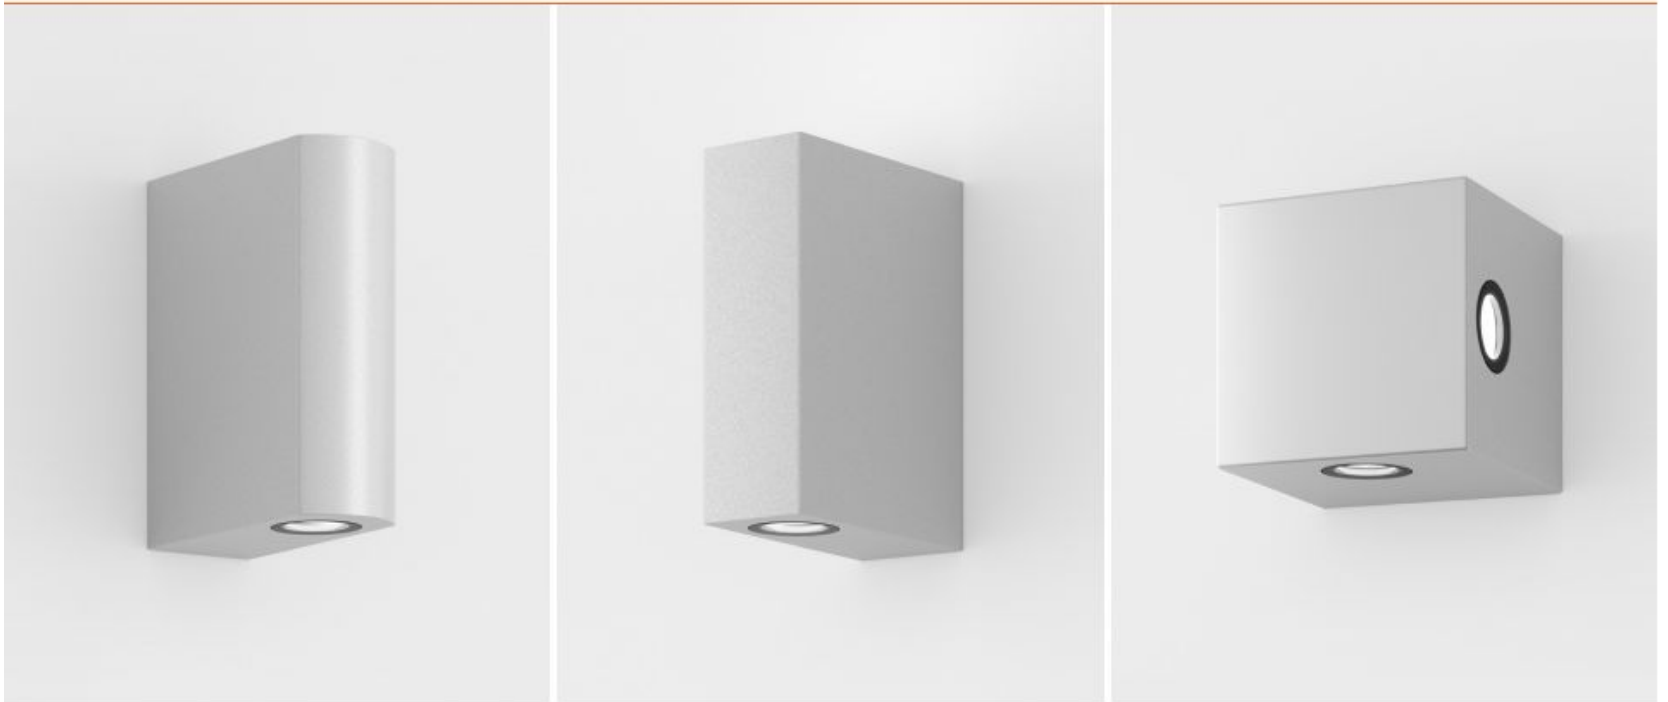


Narrow Beam **3°**




Wide Beam **75°**


Razer RD & SQ Beam Patterns

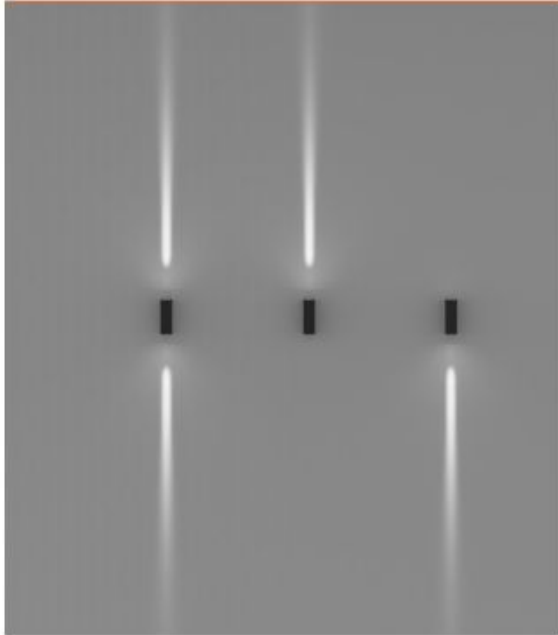

Narrow Beam **3°**

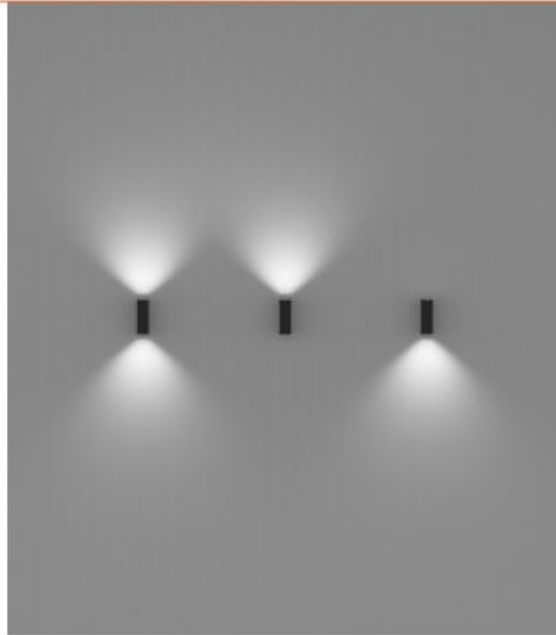


Wide Beam **75°**

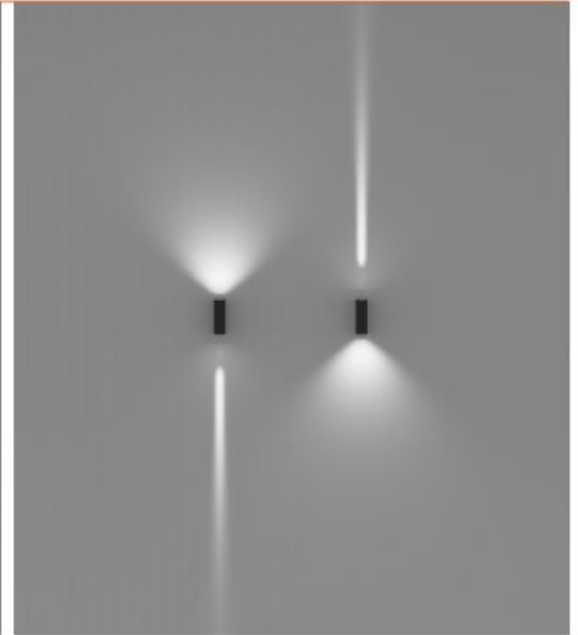

Narrow & Wide Beams

Razer Cube Beam Patterns

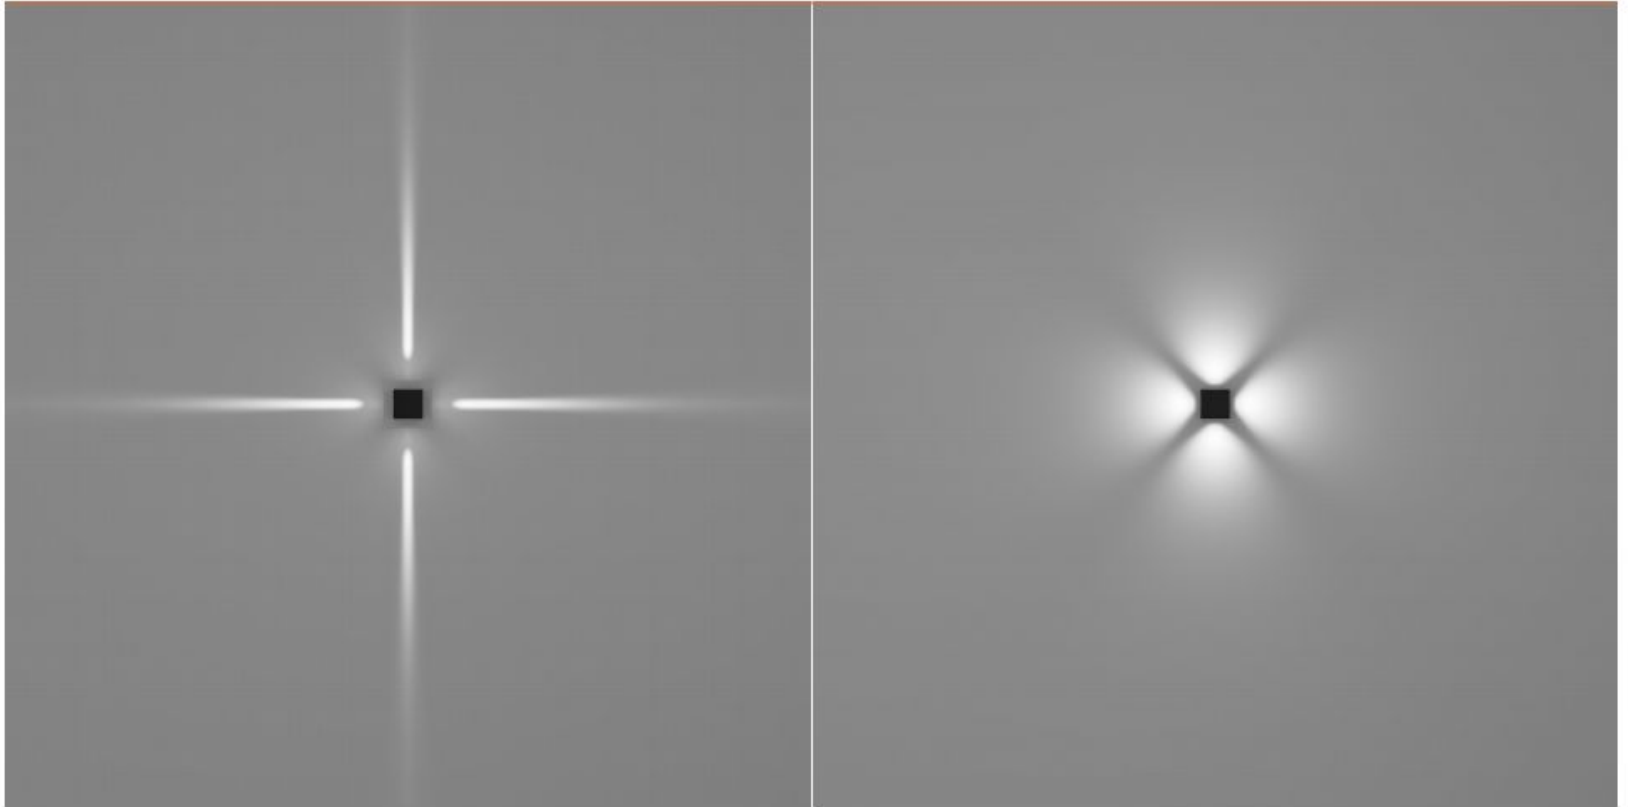

Narrow Beam 3°

Wide Beam 75°

Razer Finishes



Framed



Framed Profile



Framed Specifications



Profile


4
Sizes

Panels



Framed Application Shot



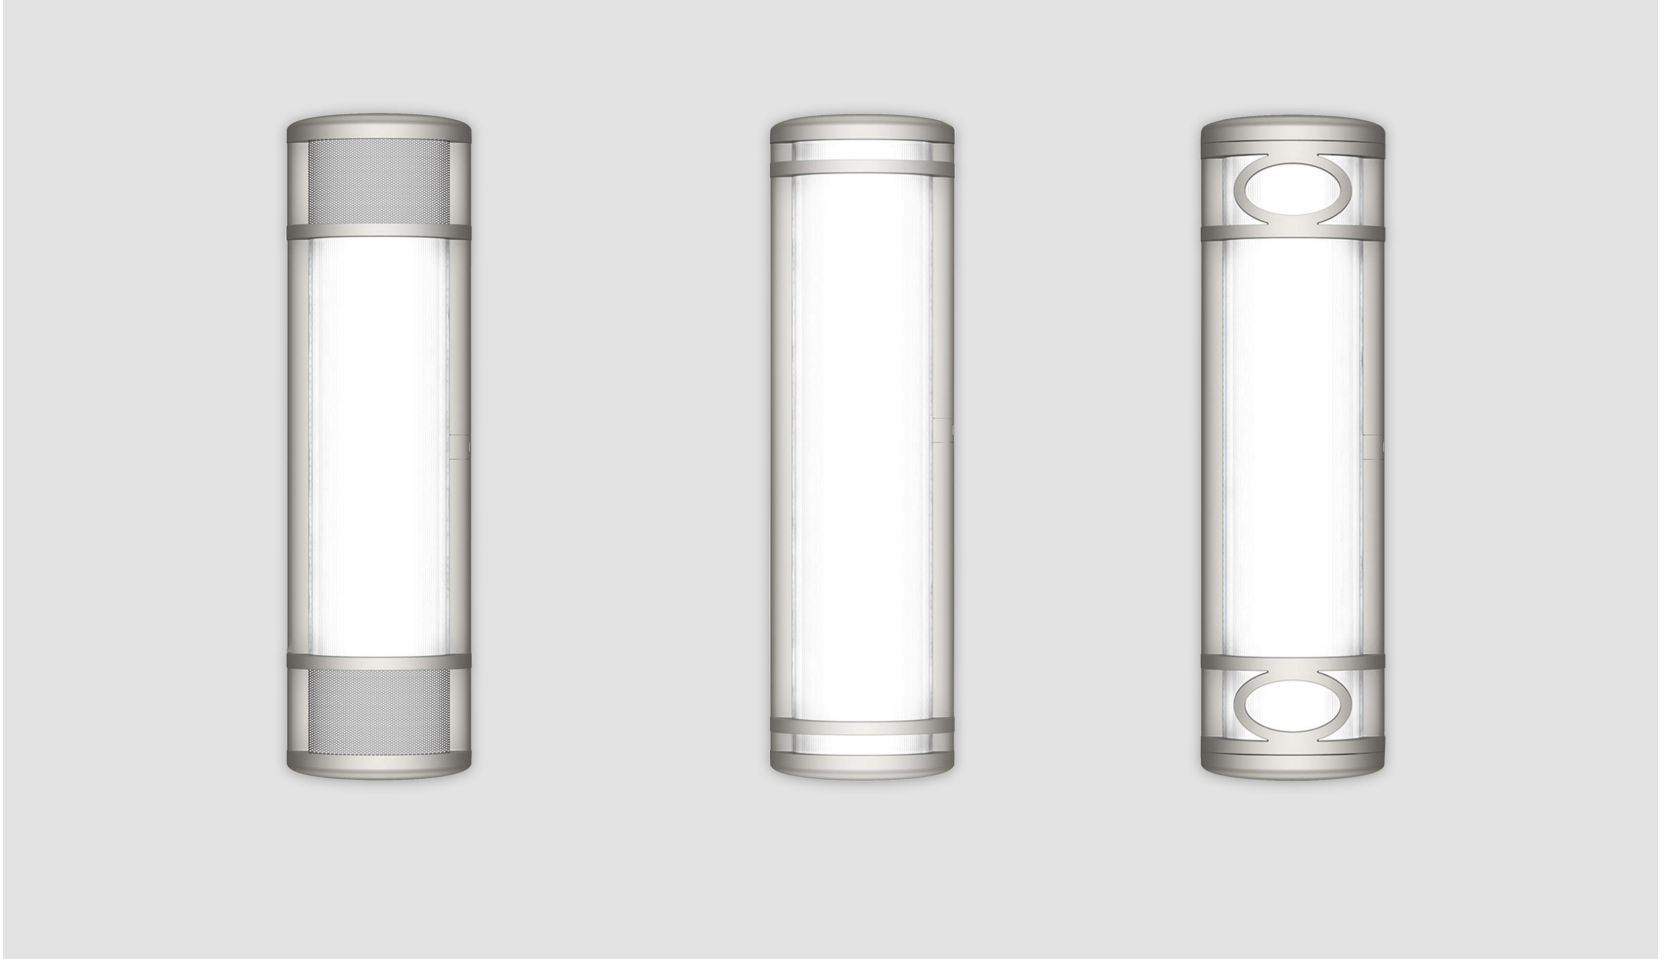

SENTINEL | SENTINEL II | SENTINEL III

Sentinel Application Shot




Sentinel Specifications



Wattage

End
Caps

Options

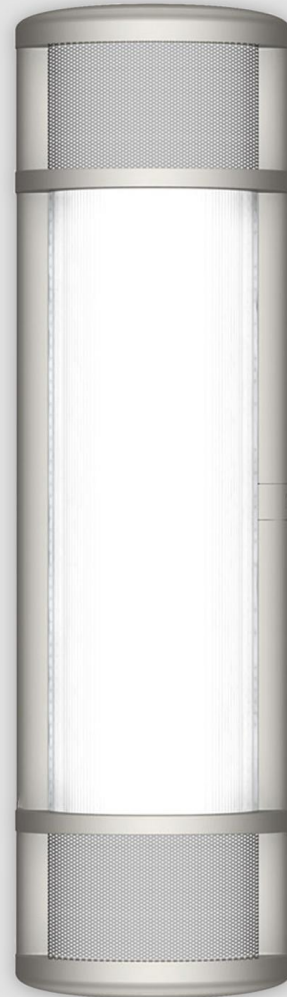


Sentinel End Caps



Non Illuminated | Narrow Beam | Wide Beam

Sentinel II Application Shot



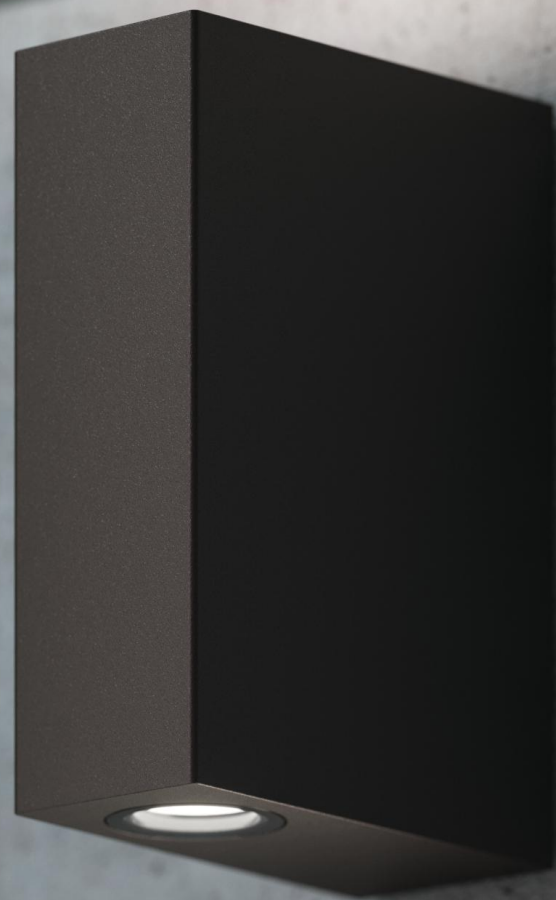

LINEAR & EXTERIOR