



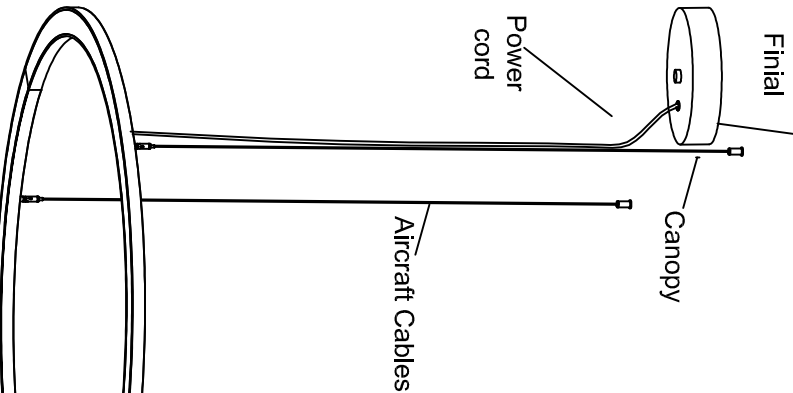



WEB PIN™ CODE: 137

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

One or two canopies
depends on the fixture's
size

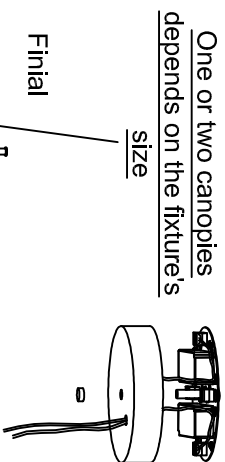

INSTALLATION INSTRUCTIONS FOR "S3" MOUNTING

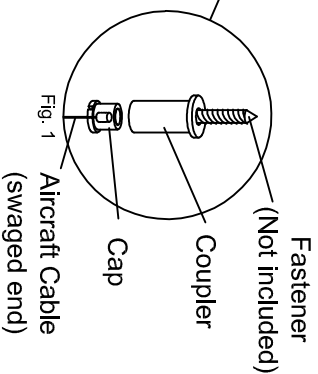

1. Mount the couplers to the ceiling using appropriate fasteners -NOT INCLUDED- according to the structure of the ceiling - see Fig.1
2. Pass the aircraft cables through the caps - see Fig.1
3. Fasten the caps to the couplers
4. Lift the fixture and attach the loose ends of the two Aircraft Cables to the cable gliders -see Fig.1
5. Make all necessary wiring connections and attach the canopy to the junction box using the bracket/nipple/finial assembly provided.
6. Level the fixture using the cable gliders. To release the grip lock, press down on the tip of the mechanism. If desired, clip the excess aircraft cables after the fixture is level.

Note: According to the options type, the fixture can have one or two power cords.

IMPORTANT NOTE:

**WHEN 2 CANOPIES ARE PROVIDED
PLEASE INSURE THAT THEY ARE
CONNECTED TO THE SAME POWER
SUPPLY BRANCH CIRCUIT.**

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES
WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: MICRO RING, MICRO RING DE, MICRO RING SE, MICRO RING II

BETA-CALCO INC. 25 Kodlak Crescent, TORONTO ONTARIO CANADA M3J 3E5