




WEB PIN™ CODE: 137

- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

INSTALLATION INSTRUCTIONS FOR TYPE "S4" MOUNTING

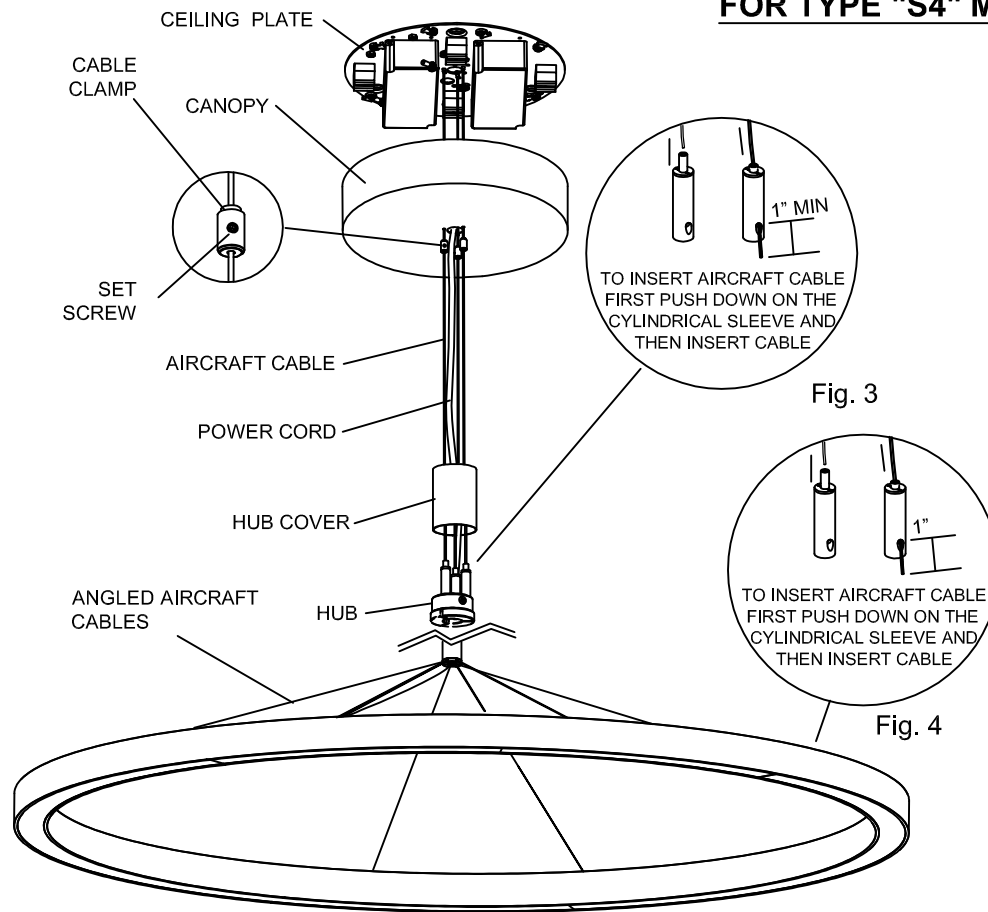

1. Place the fixture on a flat surface.
2. Lift the ceiling plate with aircraft cables, make the wiring connections inside the junction box, and attach the ceiling plate to the junction box.
3. Lift the fixture and insert the long aircraft cables into the cable gliders on the hub (Fig. 3) as well as on the gliders on the ring. Ensure that the aircraft cables and power cords are passing through the canopy and hub cover.

Important:

The angled aircraft cables attached to the ring (Fig. 4) must protrude 1 inch only beyond the glider.

4. Adjust height of the fixture, secure the power cord with the with cables ties, and trim or coil inside the canopy the excess power cords.
5. Make all necessary electrical connections, lift canopy cover into position and secure with 3x cable clamps and set screws.

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: MICRO RING, MICRO RING DE, MICRO RING SE, MICRO RING II