

Fixture comes partially assembled.




Ensure electrical circuit is disconnected before installation.





Luminaires must be installed in accordance with national electrical code and local regulation.

Place fixture upside down on a flat surface. Remove diffusers to gain access to the LED tray assemblies (on some cases, diffusers are already removed from fixtures to provide ease in assembly)

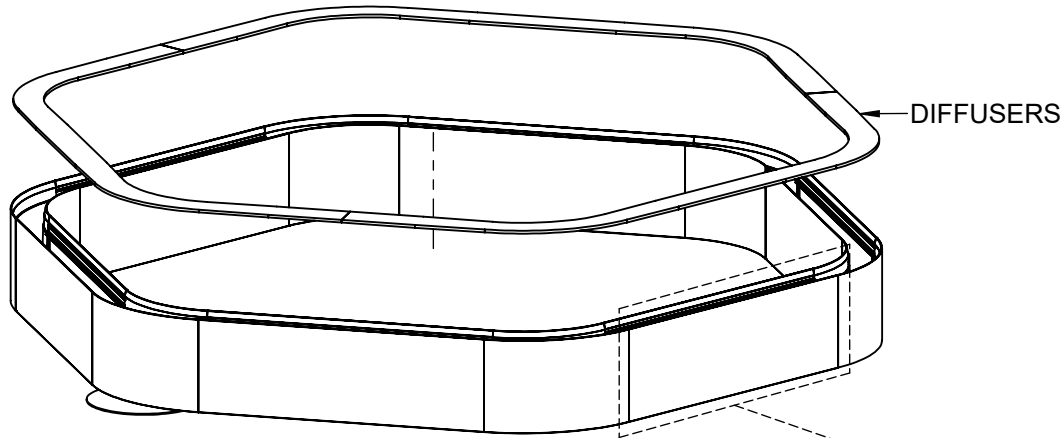


Make sure to wear anti-static finger tips provided when doing all this preparation

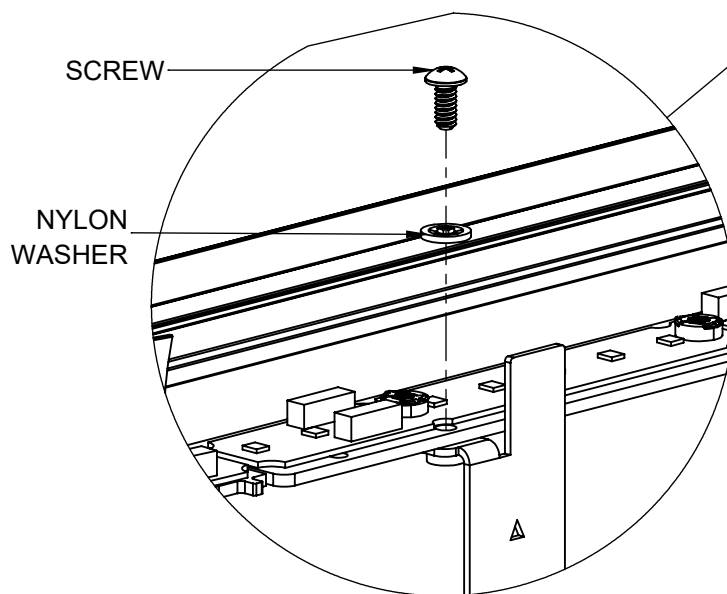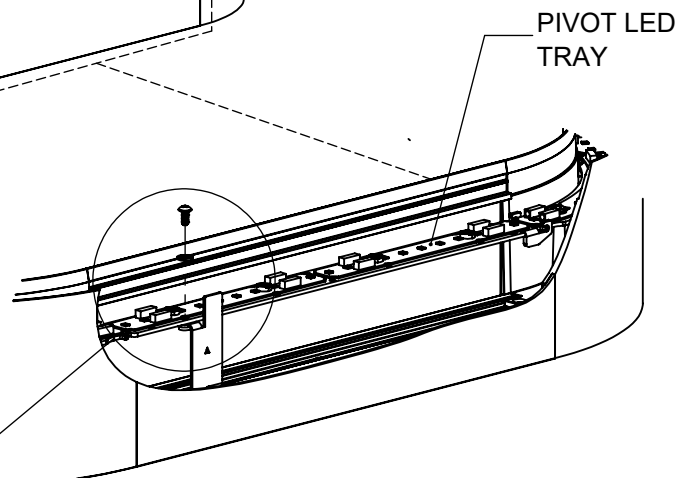


Remove screws that secures the pivot gear trays. On **page 5**, check for the recommended mounting hole locations for each corresponding fixture size (NOTE: Only perform these on tray assemblies that directly covers the mounting holes).



Bring the fixture up to its desired location. Ensure electrical circuit is disconnected before installations. Pre-hang fixtures using the safety cables provided.

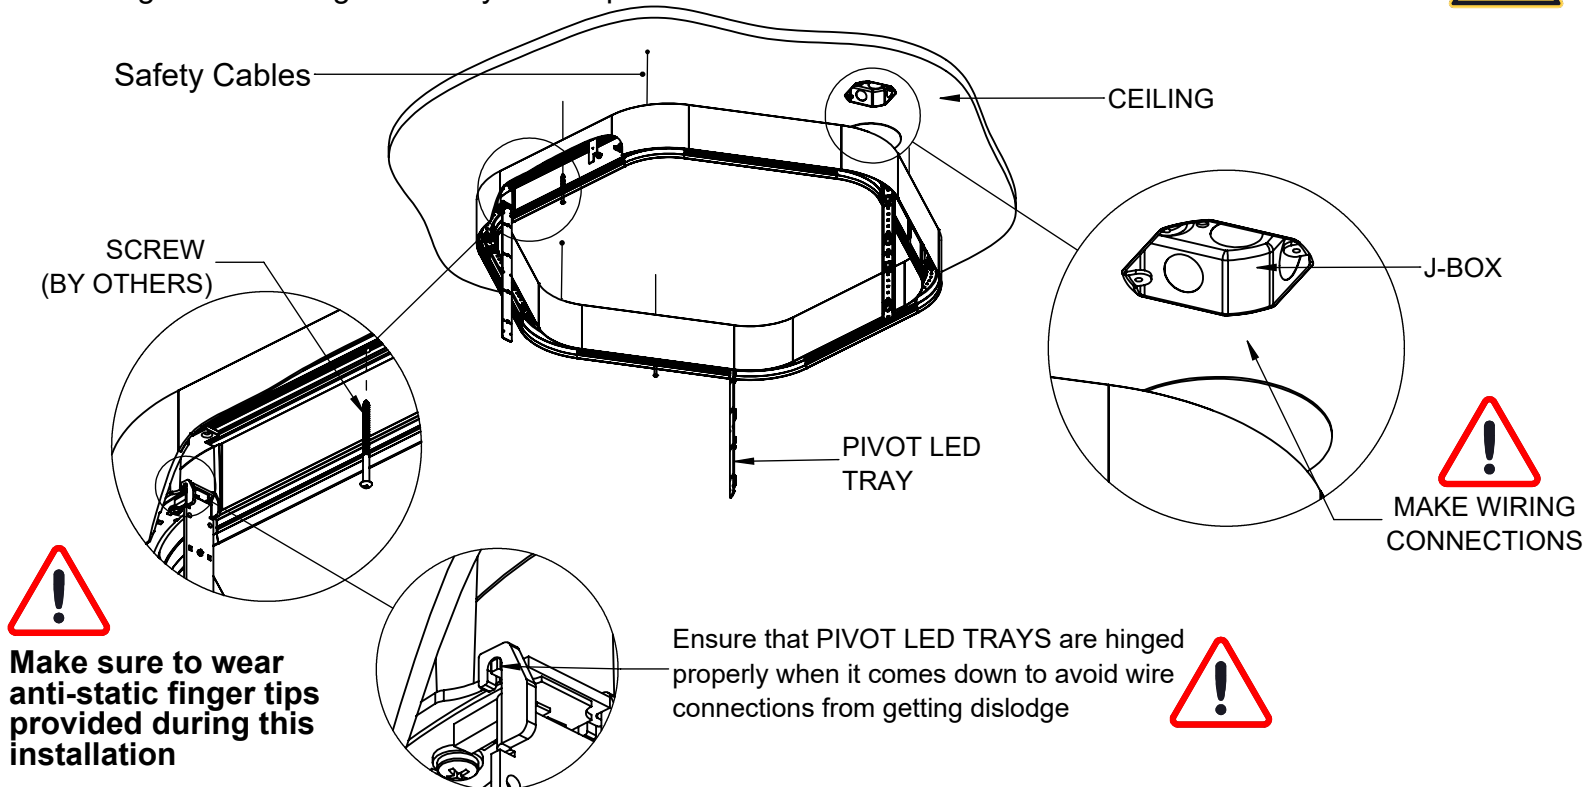

Reinstall pivot LED trays and make sure to place a nylon washer between the screws and LED board. Mount the diffusers back with textured surface facing outwards

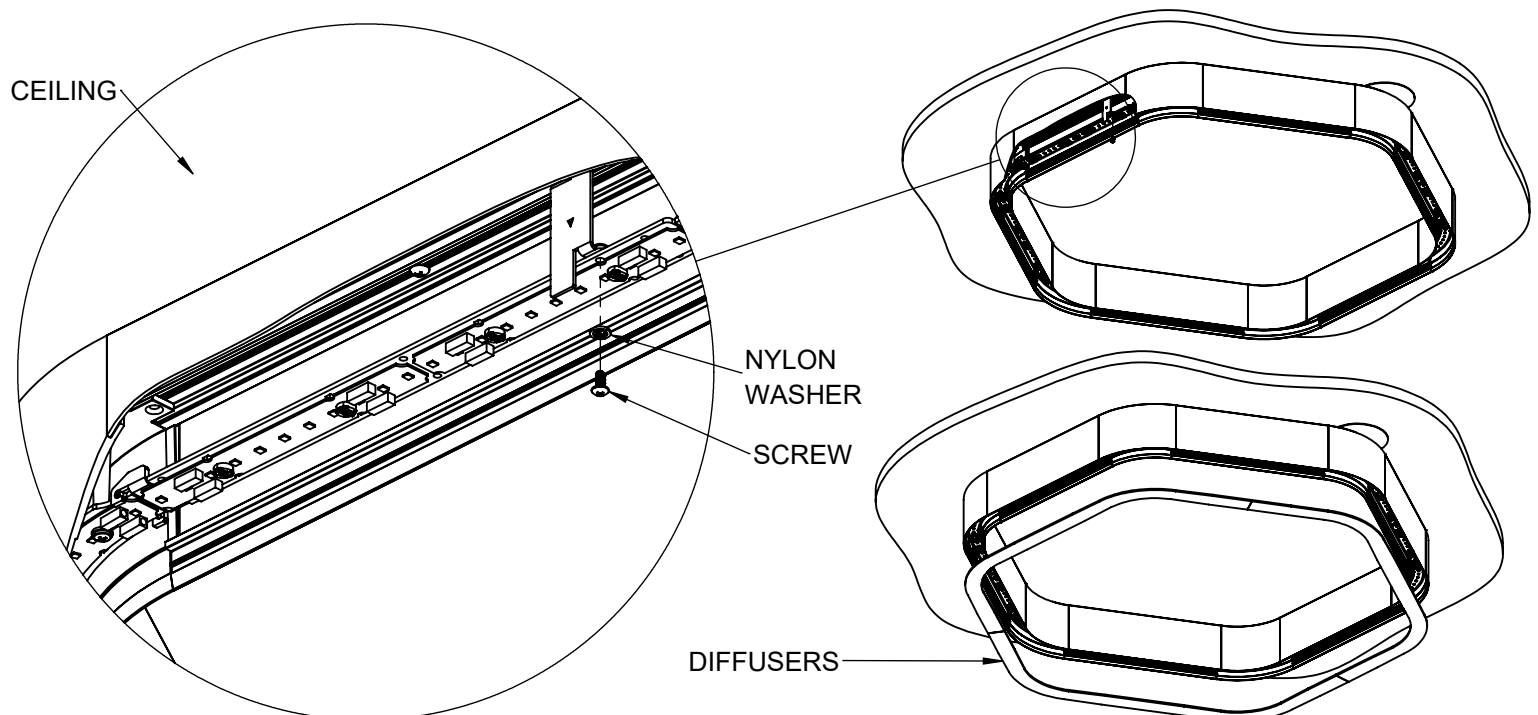


ACOUSTIC PANEL INSTALLATIONS

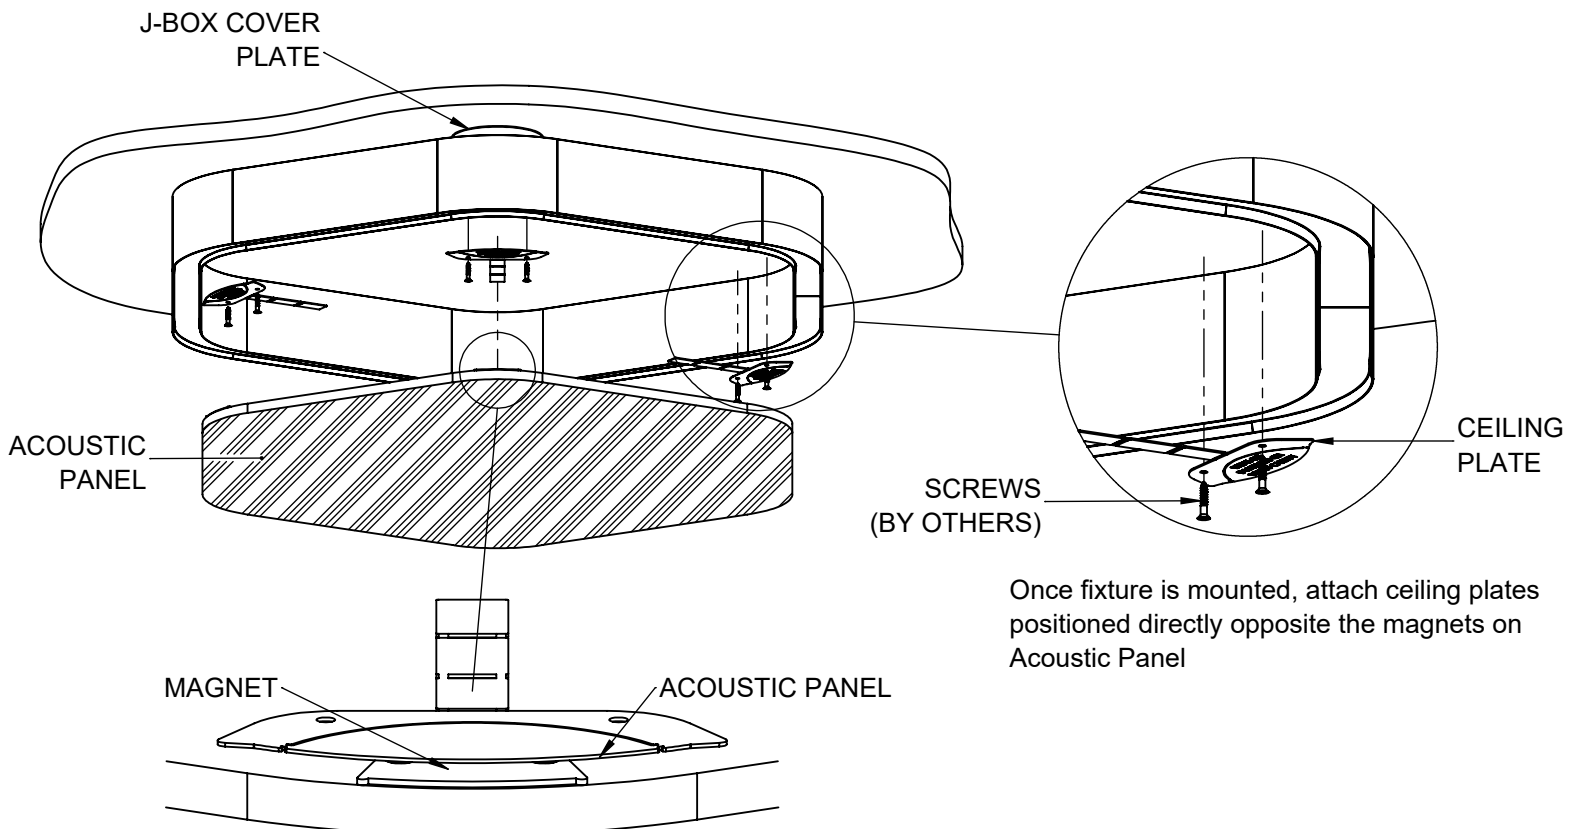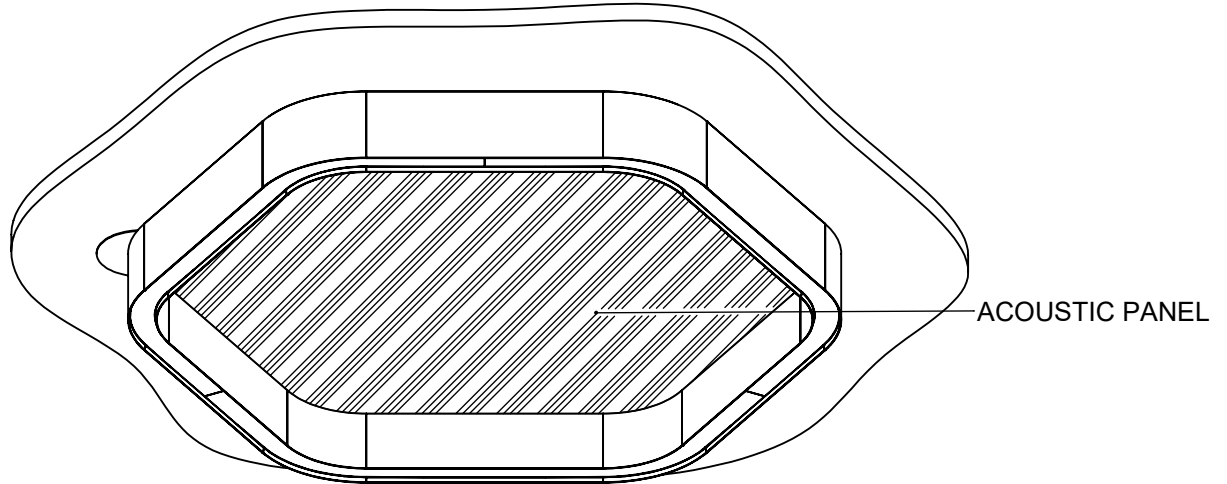


Once fixture is mounted, attach ceiling plates positioned directly opposite the magnets on Acoustic Panel

One magnet position will use the J-BOX cover plate as its mounting point

RECOMMENDED MOUNTING LOCATIONS
 (TOP VIEW)

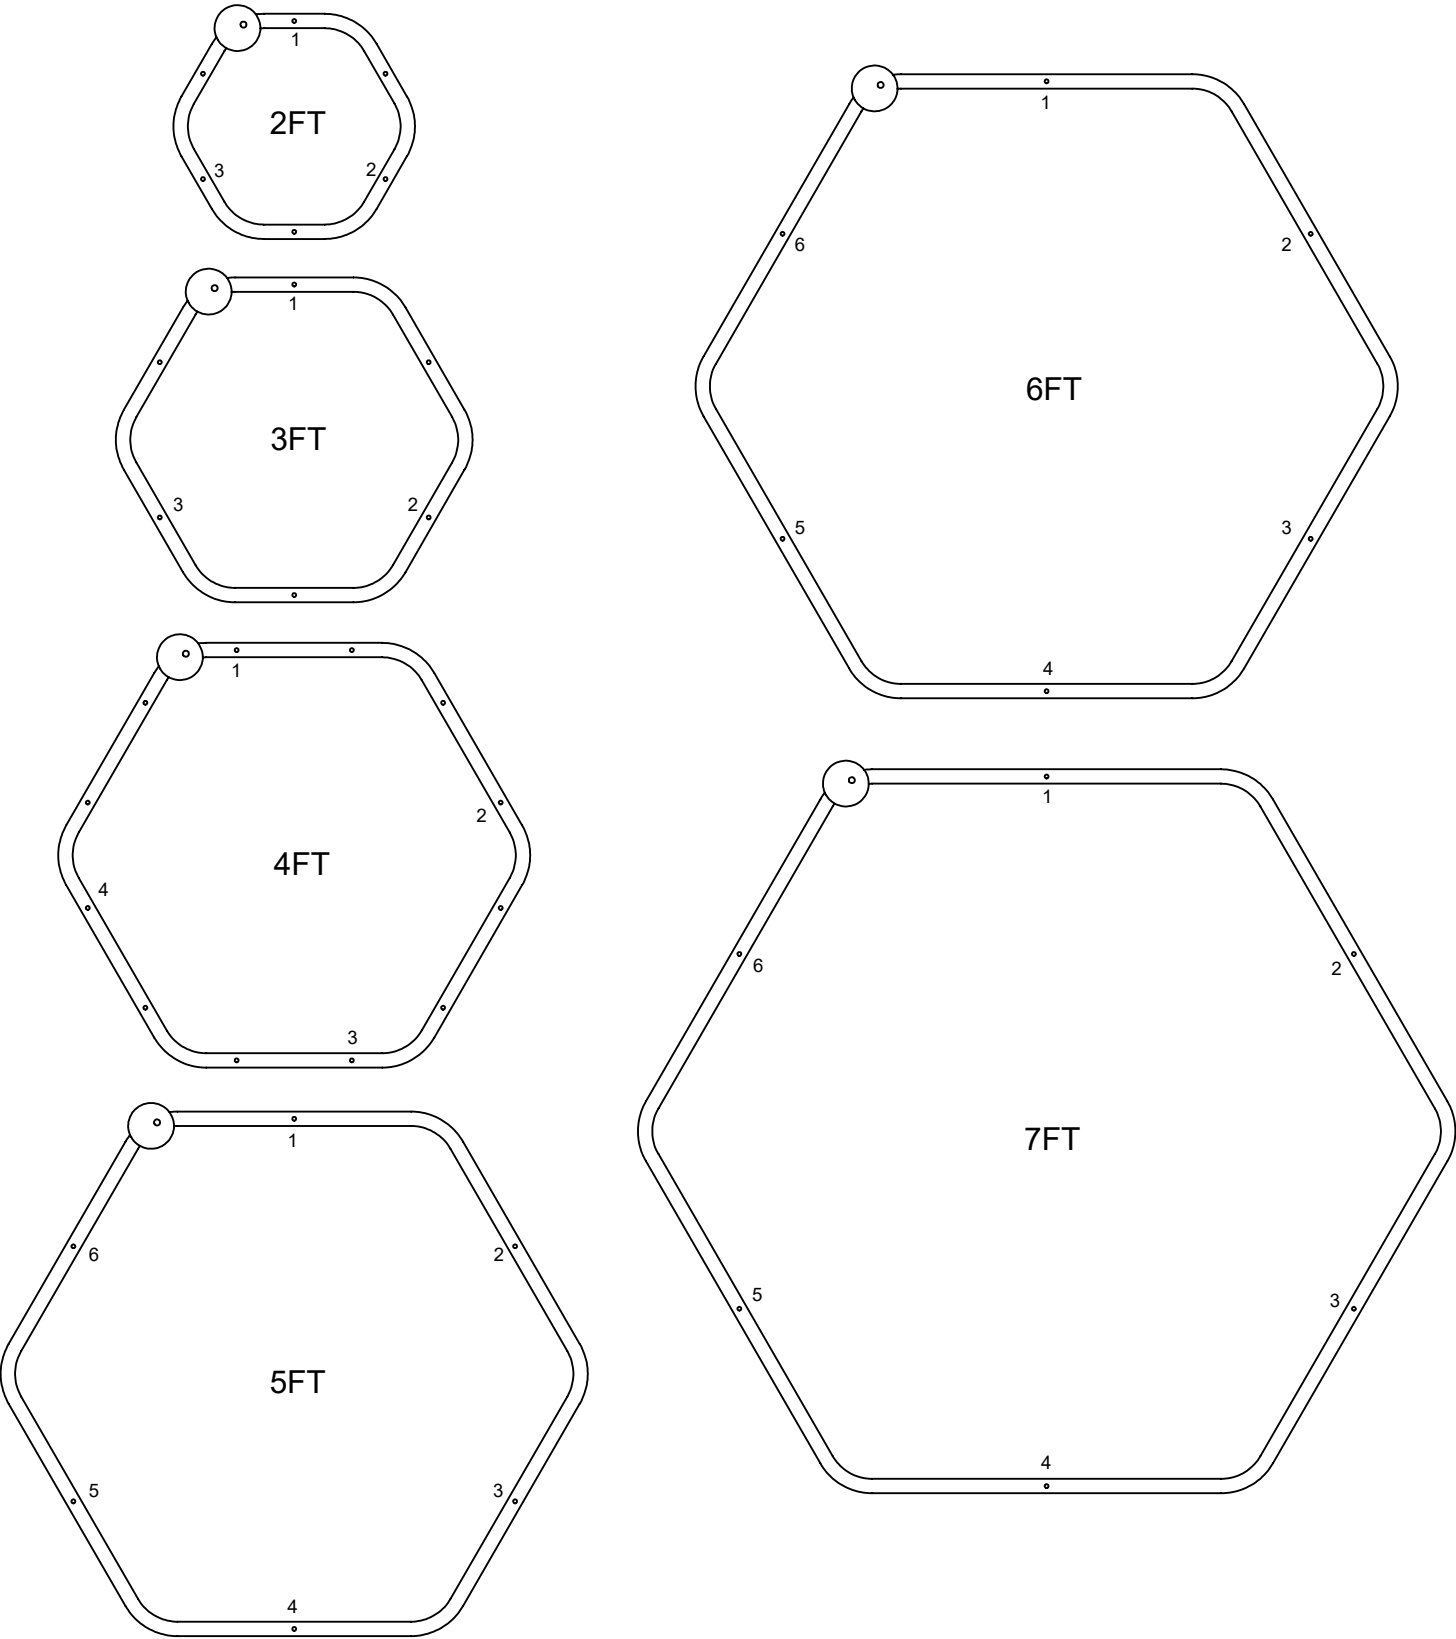

OPTIONAL ACOUSTIC PANEL POSITIONS (HOW TO USE THE CEILING PLATE)

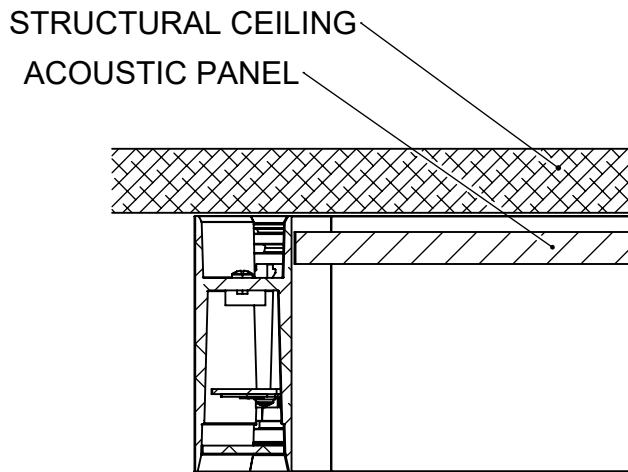

CEILING PLATE FORMS

