

## 1 IMPORTANT NOTE

Fixture comes partially assembled.


⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

## 2 STANDALONE / NON-CONTINUOUS INSTALLATION

### STEP 1

Refer to "Aircraft Cable Suspension" installation instruction sheet and make all appropriate ceiling and wiring connections. Suspend and level the luminaire. Trim excess aircraft cable.



## 3 CONTINUOUS INSTALLATION

### STEP 2

Begin with fixture segment that has power drop.

### STEP 3

Refer to "Aircraft Cable Suspension" installation instruction sheet and make all appropriate ceiling and wiring connections. Suspend and level the luminaire. DO NOT trim excess aircraft cable until entire fixture installation is complete.

### STEP 4

Remove diffuser(s) and reflector(s) at the ends of the sections. (See FIG 2)

### STEP 5




Disconnect connection between reflector and fixture. (See FIG 2)


### STEP 6

Suspend the next fixture segment and align to the previous segment by sliding the segments together. (See FIG 3 and FIG 4)

### STEP 7

Make electrical connection between sections using connectors. (See FIG 3)

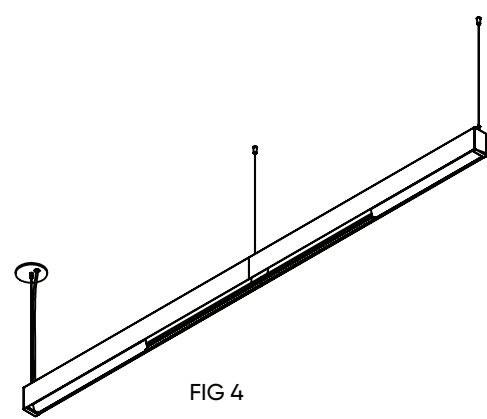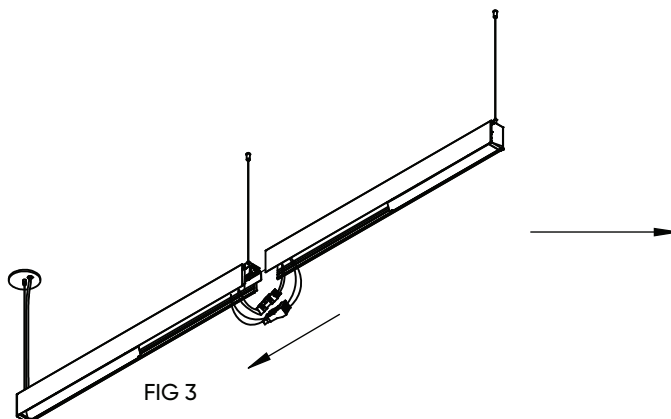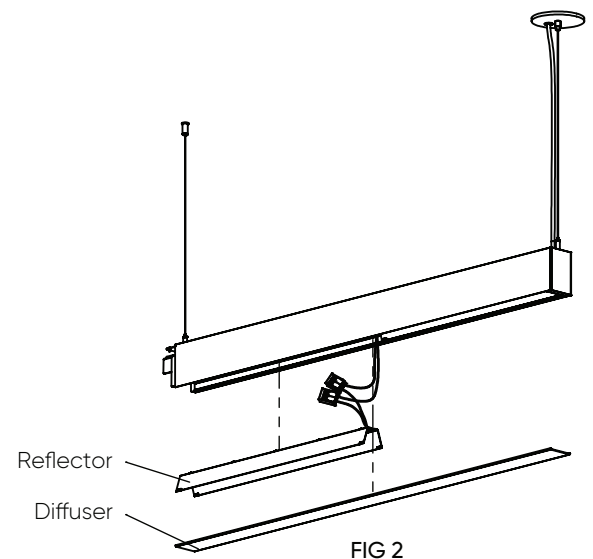

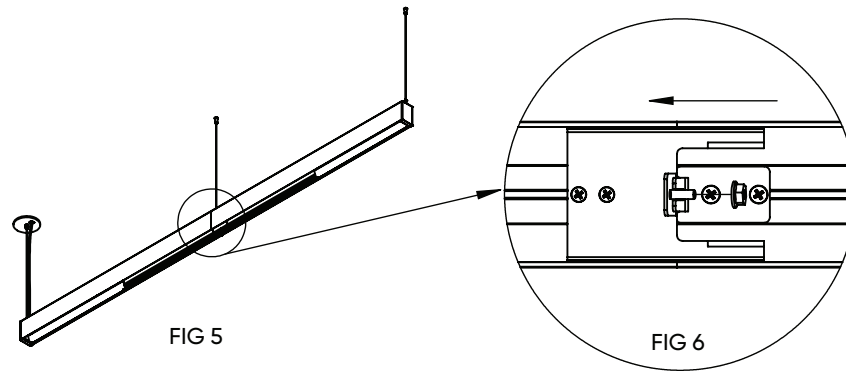

**STEP 8**

Connect the two segments together by fastening the hex nut. (See FIG 6)

**STEP 9**

Re-make all wiring connections to the reflector(s).

**STEP 10**

Re-install diffuser and reflector(s).

**STEP 11**

Fasten the suspension plate to the next fixture segment using the provided screws. (See FIG 7)




FIG 7

**STEP 12**

Repeat steps 4-11 until entire fixture has been installed.

**STEP 13**

In the event of EM drivers are used: access the drivers and switch EACH driver to 'on' position before plugging into power.



## 4 CONTINUOUS SEAMLESS DIFFUSER INSTALLATION

**STEP 1**

Measure entire fixture length from start end cap to the last end cap.  
The desired seamless diffuser length can be between 0.75" to 1.25" shorter than fixture length.

**STEP 2**

Make a straight incision mark on the seamless diffuser using a box knife or cutting tool.

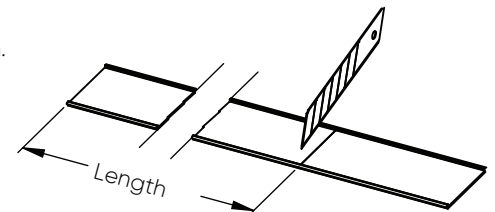

**STEP 3**

Snap at incision mark and install seamless diffuser.

