

1 IMPORTANT NOTE


Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.


⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 MOUNTING LOCATIONS


4FT

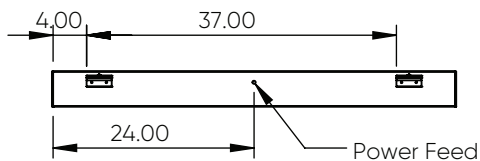


6FT

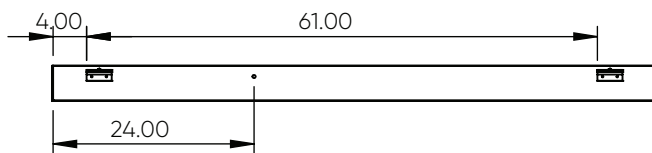


8FT

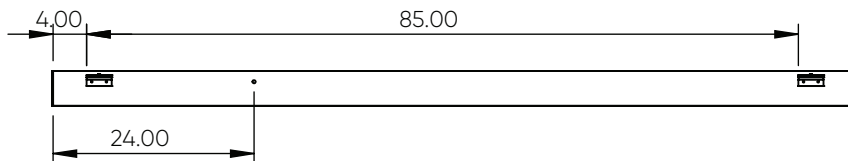

10FT

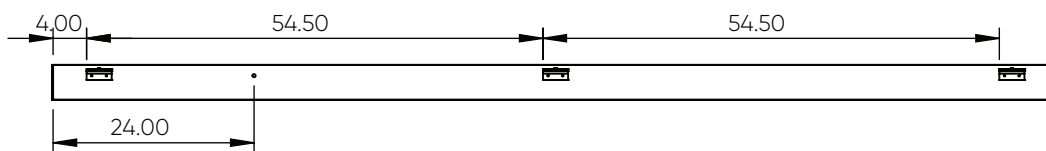

12FT

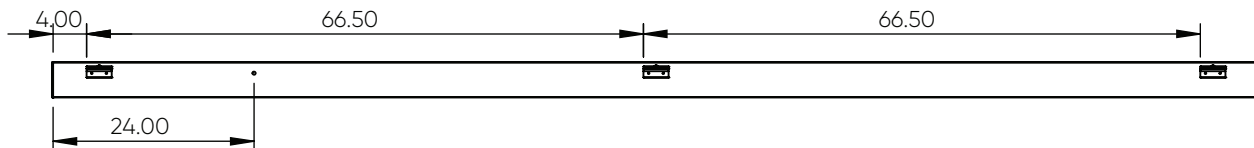

Power feed is always located 24" from end of the housing.

3 STANDALONE INSTALLATION

STEP 1

Fasten the wall bracket to the wall using appropriate fasteners (not included) in accordance with the structure of the wall. (See FIG 1 and FIG 2)

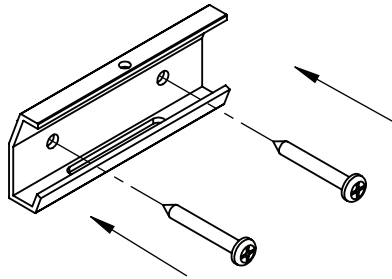


FIG 1




FIG 2

STEP 2

Make appropriate wiring connections between fixture and power box.

STEP 3

Mount junction box cover using appropriate fasteners (not included). (See FIG 3)


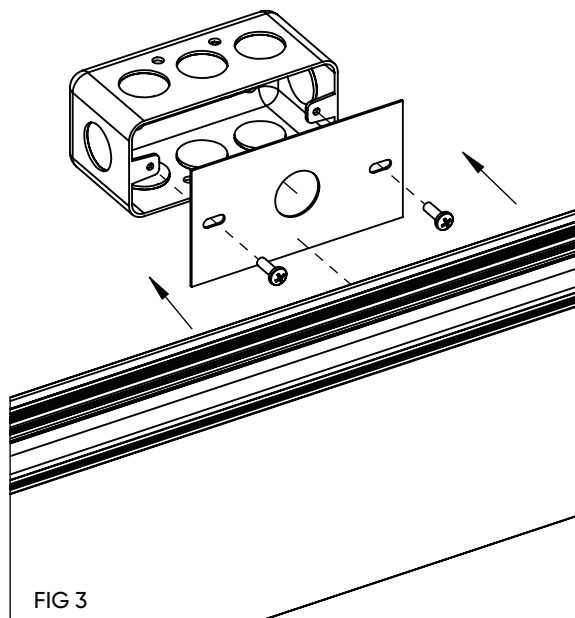


FIG 3

4 STANDALONE / NON-CONTINUOUS INSTALLATION

STEP 4

Install fixture into the wall bracket and secure in position using the provided screws. (See FIG 4 and FIG 5)

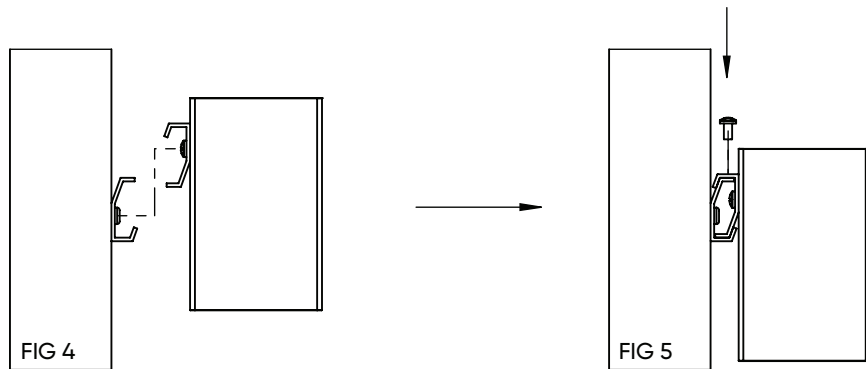



5 CONTINUOUS INSTALLATION


STEP 5

Remove diffusers and reflectors at the ends of the sections. (See FIG 6)

STEP 6

Align the next fixture segment to the previous segment by sliding the segments together. (See FIG 7 and FIG 8)

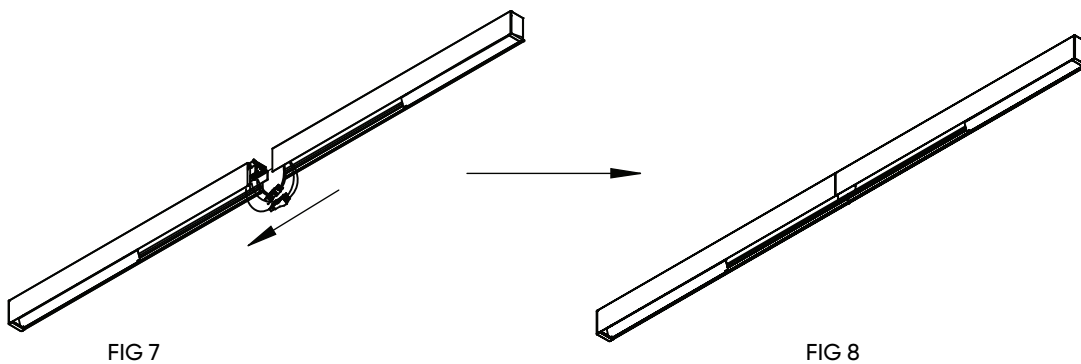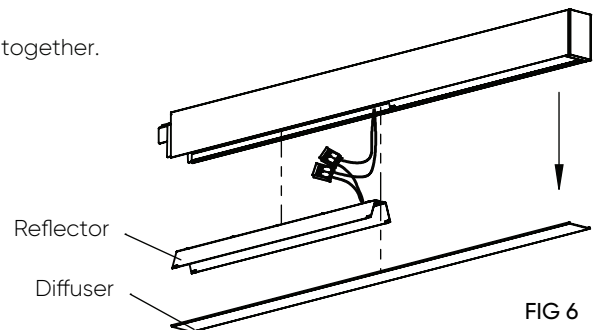

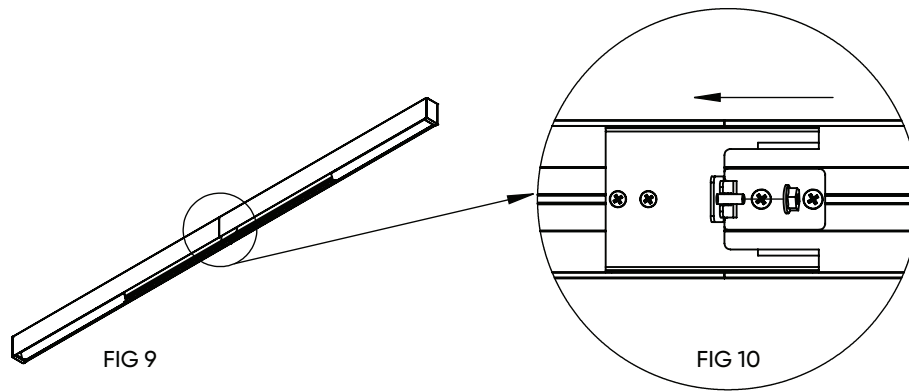

STEP 7

Connect the two segments together by fastening the hex nut. (See FIG 10)

STEP 8

Re-make all wiring connections to the reflector(s).

STEP 9

Re-install diffuser and reflector(s).

STEP 10

Fasten the plate to the next fixture segment using the provided screws. (See FIG 11)

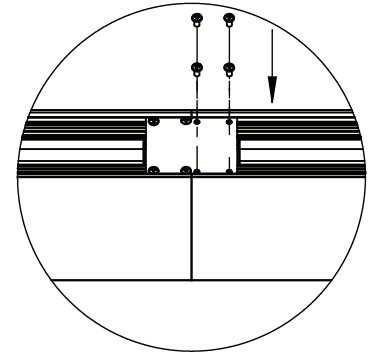


FIG 11

STEP 11

Repeat steps 1-10 until entire fixture has been installed.

STEP 12

In the event of EM drivers are used: access the drivers and switch EACH driver to 'on' position before plugging into power.



6 CONTINUOUS SEAMLESS DIFFUSER INSTALLATION

STEP 1

Measure entire fixture length from start end cap to the last end cap.
The desired seamless diffuser length can be between 0.75" to 1.25" shorter than fixture length.

STEP 2

Make a straight incision mark on the seamless diffuser using a box knife or cutting tool.

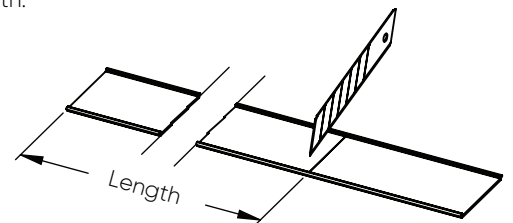

STEP 3

Snap at incision mark and install seamless diffuser.

