BLOCK™ - WALL
INSTALLATION INSTRUCTIONS

1 IMPORTANT NOTE


Fixture comes partially assembled.

Ensure electrical circuit is disconnected before installation.


Luminaires must be installed in accordance with National electrical code and local regulation.

2 MOUNTING LOCATIONS


4FT

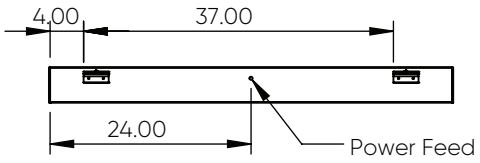


6FT

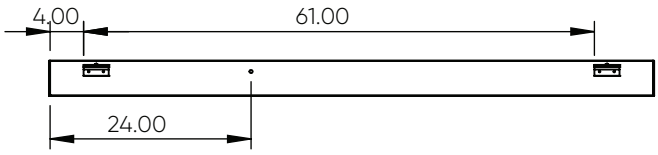


8FT

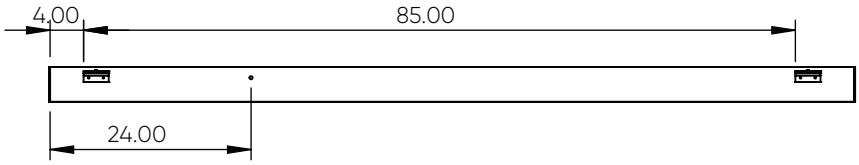

10FT

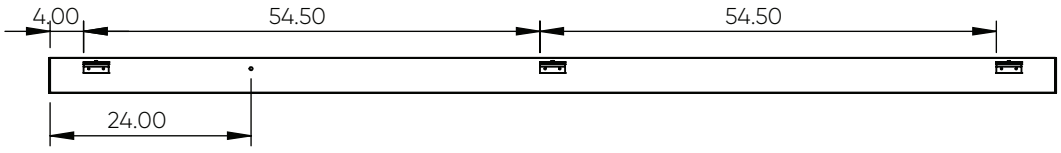

12FT

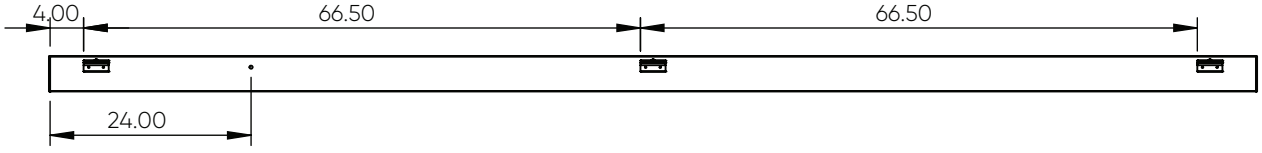

Power feed is always located 24" from end of the housing.

BETACALCO

1400 Whitehorse Road,
Toronto, ON M3J 3A7

+1 416-531-9942
info@betacalco.com

betacalco.com

3 STANDALONE INSTALLATION

STEP 1
Fasten the wall bracket to the wall using appropriate fasteners (not included) in accordance with the structure of the wall. (See FIG 1 and FIG 2)

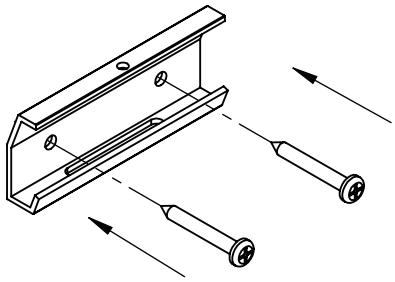


FIG 1




FIG 2

STEP 2
Make appropriate wiring connections between fixture and power box.

STEP 3
Mount junction box cover using appropriate fasteners (not included). (See FIG 3)

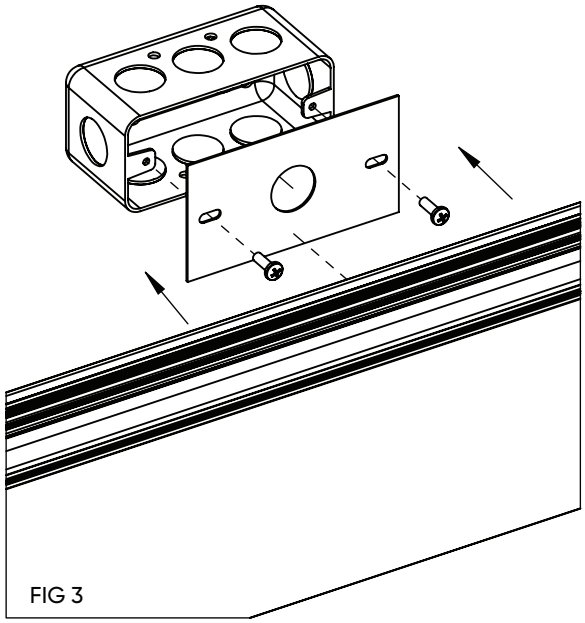


FIG 3

1400 Whitehorse Road,
Toronto, ON M3J 3A7
+1 416-531-9942
info@betacalco.com
betacalco.com

4 STANDALONE / NON-CONTINUOUS INSTALLATION

STEP 4
Install fixture into the wall bracket and secure in position using the provided screws. (See FIG 4 and FIG 5)

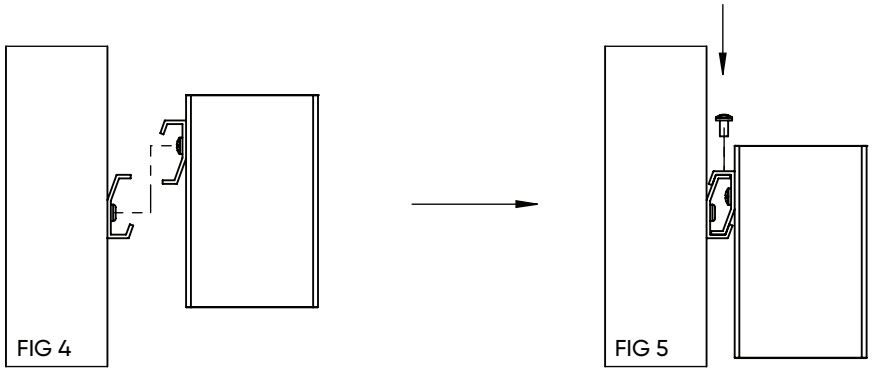


FIG 4 FIG 5

5 CONTINUOUS INSTALLATION

STEP 5
Remove diffusers and reflectors at the ends of the sections. (See FIG 6)

STEP 6
Align the next fixture segment to the previous segment by sliding the segments together.
(See FIG 7 and FIG 8)

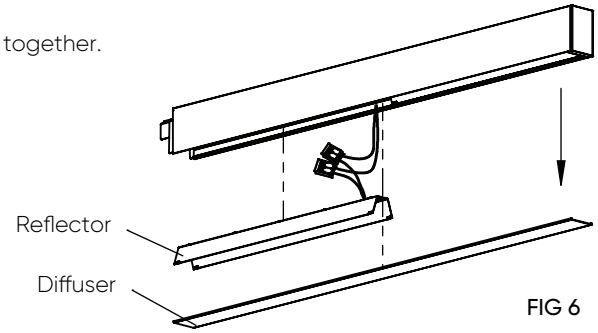


FIG 6

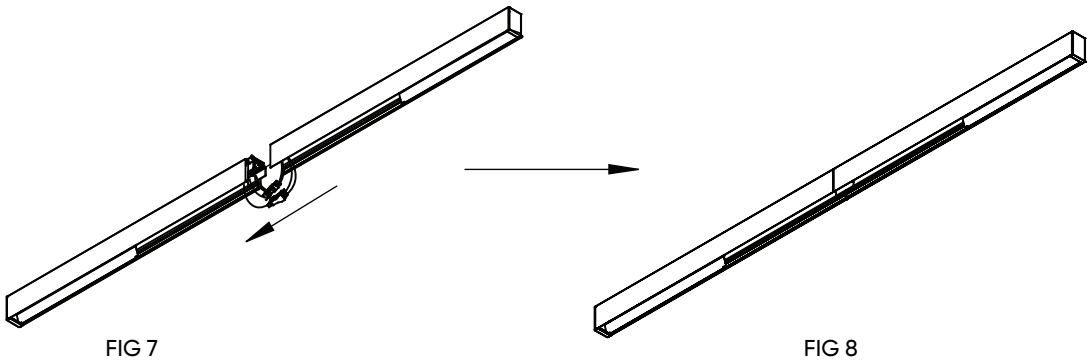


FIG 7 FIG 8

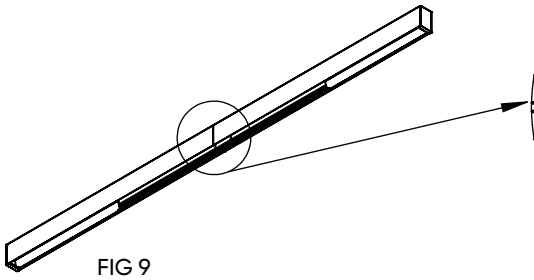


FIG 9

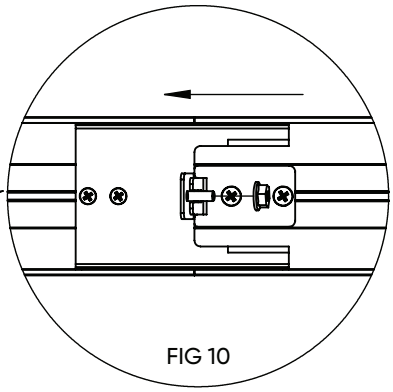


FIG 10

STEP 7
Connect the two segments together by fastening the hex nut. (See FIG 10)

STEP 8
Re-make all wiring connections to the reflector(s).

STEP 9
Re-install diffuser and reflector(s).

STEP 10
Fasten the plate to the next fixture segment using the provided screws. (See FIG 11)

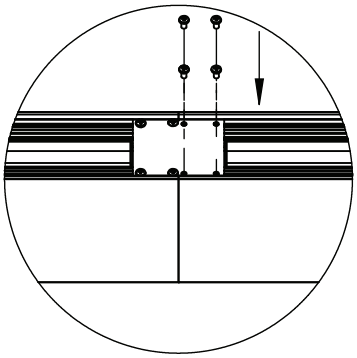


FIG 11


STEP 11
Repeat steps 1-10 until entire fixture has been installed.


STEP 12
In the event of EM drivers are used: access the drivers and switch EACH driver to 'on' position before plugging into power.

6 CONTINUOUS SEAMLESS DIFFUSER INSTALLATION

STEP 1
Measure entire fixture length from start end cap to the last end cap.
The desired seamless diffuser length can be between 0.75" to 1.25" shorter than fixture length.

STEP 2
Make a straight incision mark on the seamless diffuser using a box knife or cutting tool.

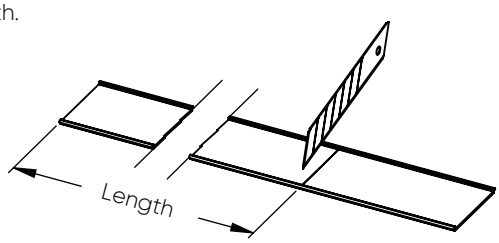



STEP 3
Snap at incision mark and install seamless diffuser.

