


## 1 DRIVER REPLACEMENT INSTRUCTION


### STEP 1

Remove the end cap by pulling it away from the fixture.




### STEP 2

Remove the diffuser(s) with the assistance of a flat head screwdriver for easier removal.

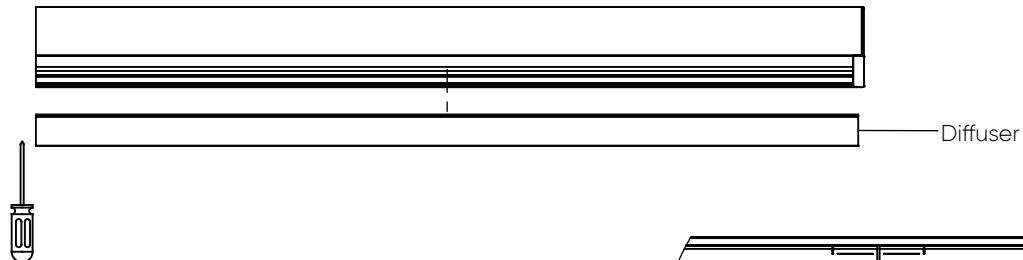


### STEP 3

Remove the reflector(s) by inserting a flat head screwdriver into the opening slot and then pulling it off.

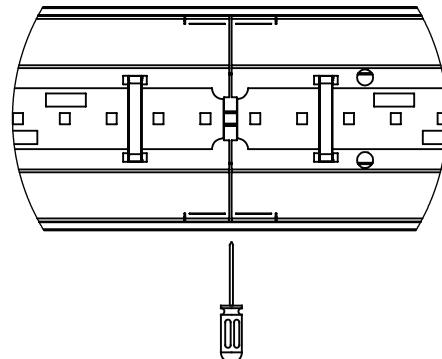


### STEP 4

Disconnect wiring from the driver.

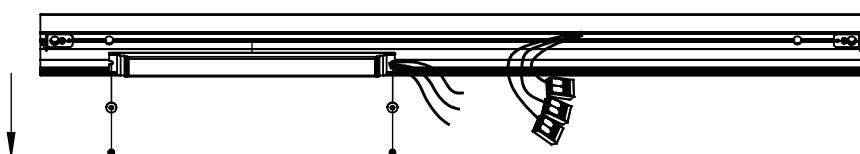

### STEP 5


Detach the driver from the fixture by unscrewing it.  
Swap out the driver and re-make wiring connections.

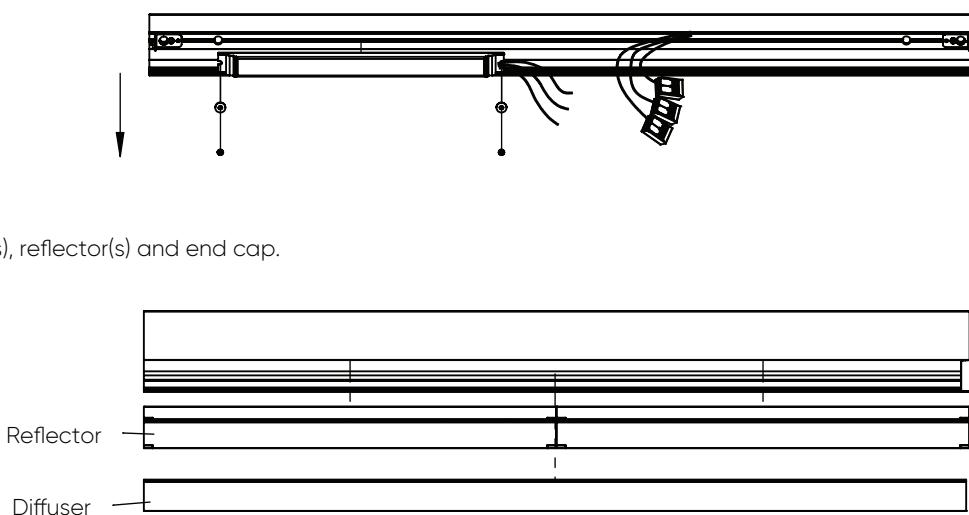

## 2 LED REPLACEMENT INSTRUCTION


### STEP 1

Remove the end cap by pulling it away from the fixture.




### STEP 2

Remove the diffuser(s) with the assistance of a flat head screwdriver for easier removal.

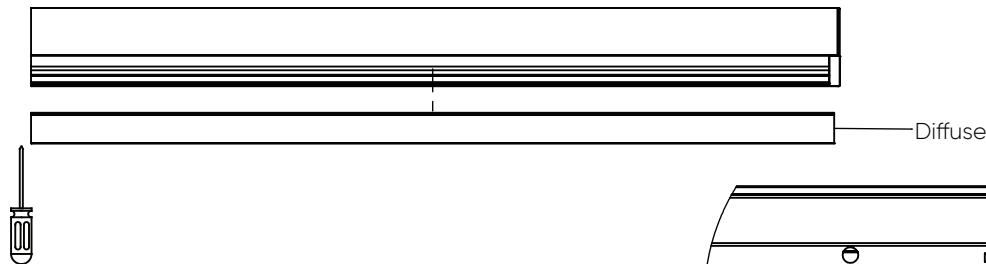

### STEP 3

Remove the reflector(s) by inserting a flat head screwdriver into the opening slot and then pulling it off.

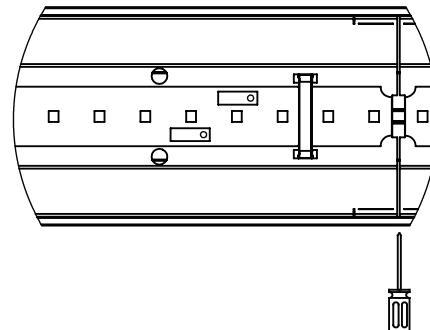


### STEP 4

Disconnect wiring between reflector and fixture.



### STEP 5

Replace the LED board by pushing the clips together to detach the LED and the reflector from each other.

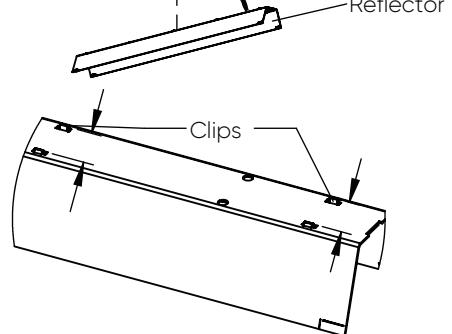

### STEP 6

Re-attach clips to the reflector and re-make wiring connections to the LED board.

