

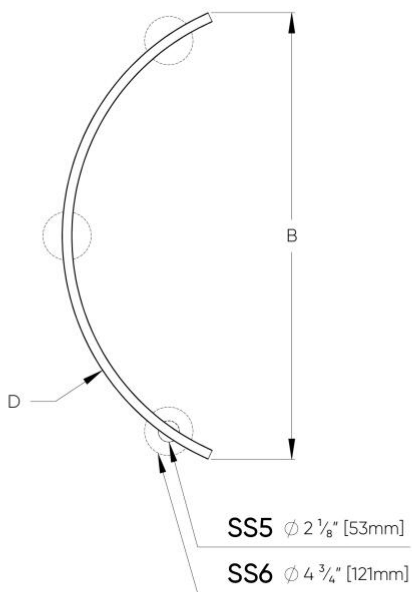
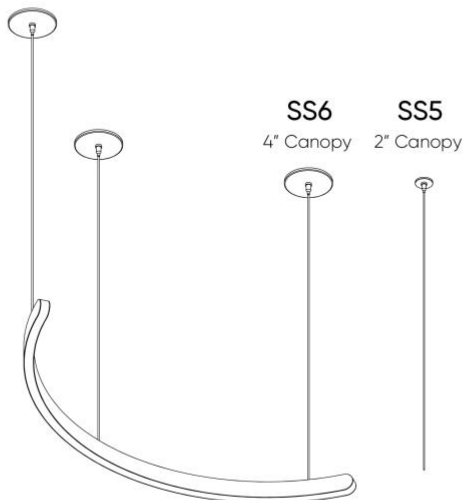


120-Deg Direct & Direct/Indirect - SS6-Vertical (Remote Drivers)

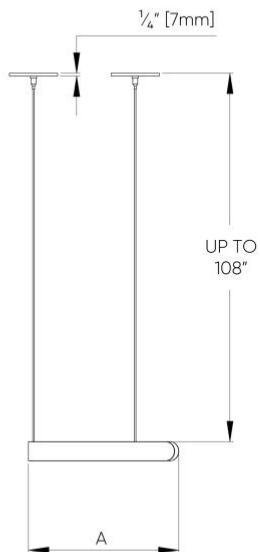




PROFILE DIMENSIONS

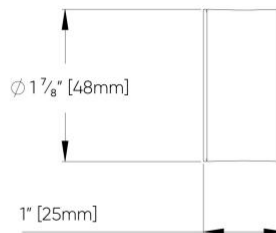


LUMINAIRE DIMENSIONS

Nominal Size	D (Actual Diameter)	A (Depth)	B (Width)	No. of Suspensions
2FT	24 5/8" [626mm]	9" [229mm]	23 1/2" [598mm]	3
3FT	36" [915mm]	11 1/8" [300mm]	33 1/2" [852mm]	3
4FT	48" [1219mm]	14 1/8" [378mm]	44" [1118mm]	3
5FT	60" [1524mm]	17 3/4" [452mm]	54 1/2" [1383mm]	3
6FT	72" [1829mm]	20 3/4" [527mm]	64 7/8" [1648mm]	3
7FT	84" [2134mm]	23 3/4" [604mm]	75 1/4" [1912mm]	3

240-Deg Direct & Direct/Indirect - SS6-Vertical (Remote Drivers)

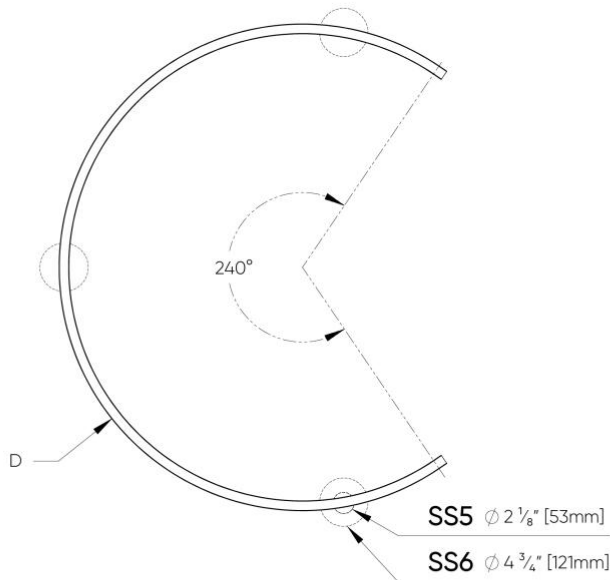
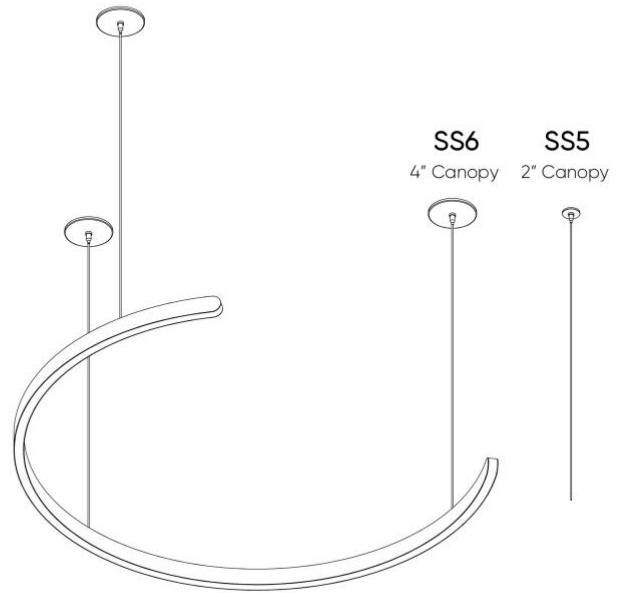
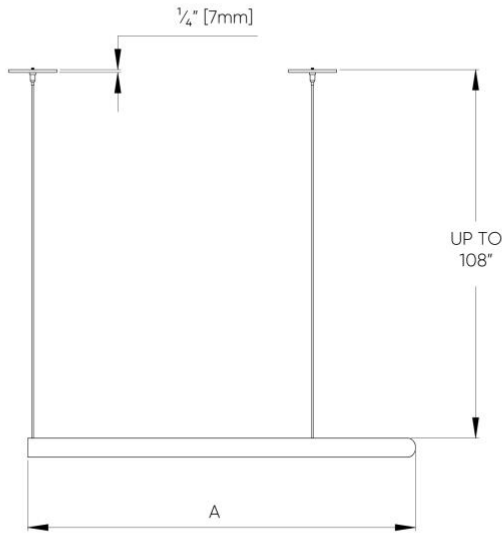


PROFILE DIMENSIONS

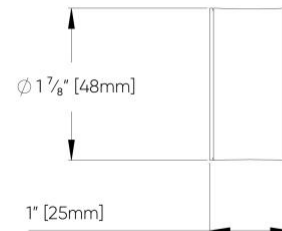


LUMINAIRE DIMENSIONS			
Nominal Size	D (Actual Diameter)	A (Depth)	No. of Suspensions
2FT	24 $\frac{5}{8}$ " [626mm]	20 $\frac{5}{8}$ " [524mm]	3
3FT	36" [915mm]	29 $\frac{1}{4}$ " [743mm]	3
4FT	48" [1219mm]	38 $\frac{1}{4}$ " [972mm]	4
5FT	60" [1524mm]	47 $\frac{1}{4}$ " [1200mm]	4
6FT	72" [1829mm]	56 $\frac{1}{2}$ " [1429mm]	6
7FT	84" [2134mm]	65 $\frac{1}{2}$ " [1657mm]	6

300-Deg Direct & Direct/Indirect - SS6-Vertical (Remote Drivers)

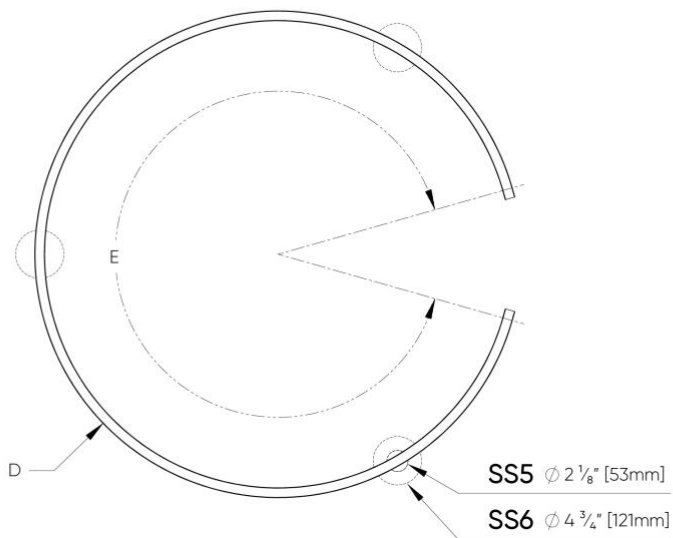
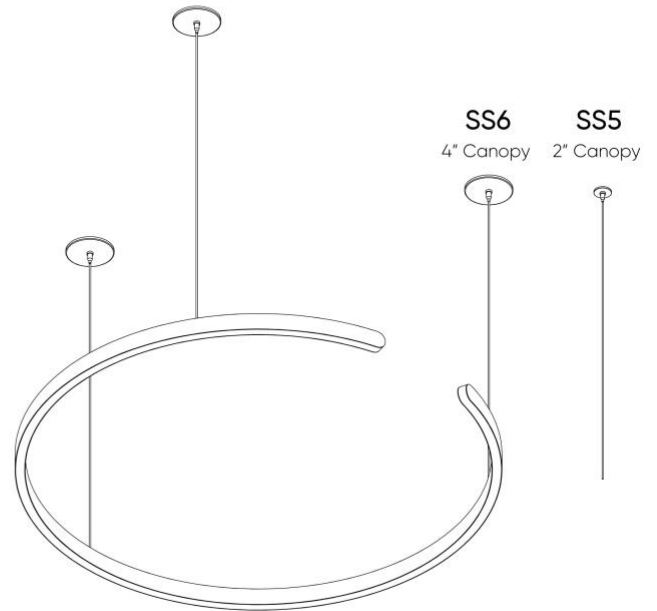
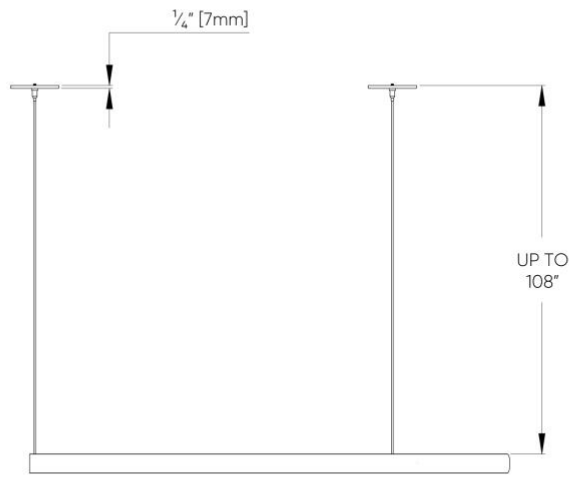


PROFILE DIMENSIONS

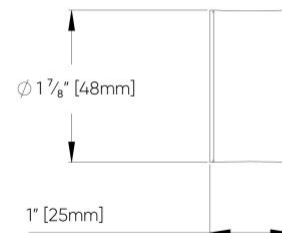


LUMINAIRE DIMENSIONS			
Nominal Size	D (Actual Diameter)	E (Sector Angle)	No. of Suspensions
2FT	24 5/8" [626mm]	300°	3
3FT	36" [915mm]	300°	3
4FT	48" [1219mm]	320°	4
5FT	60" [1524mm]	320°	4
6FT	72" [1829mm]	330°	6
7FT	84" [2134mm]	330°	6

300-Deg Direct & Direct/Indirect - SS7-Hub (Remote Drivers)

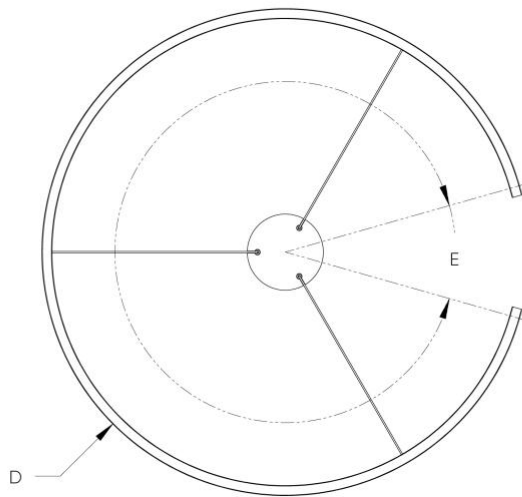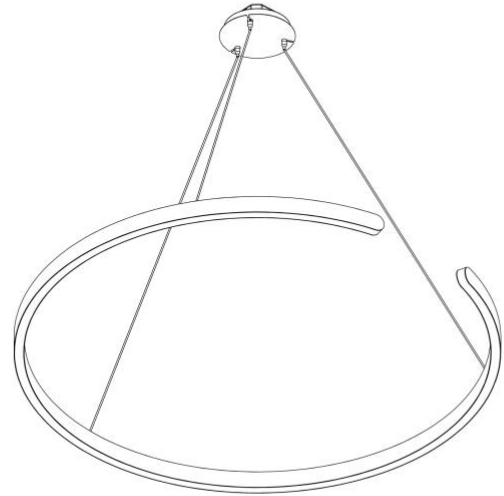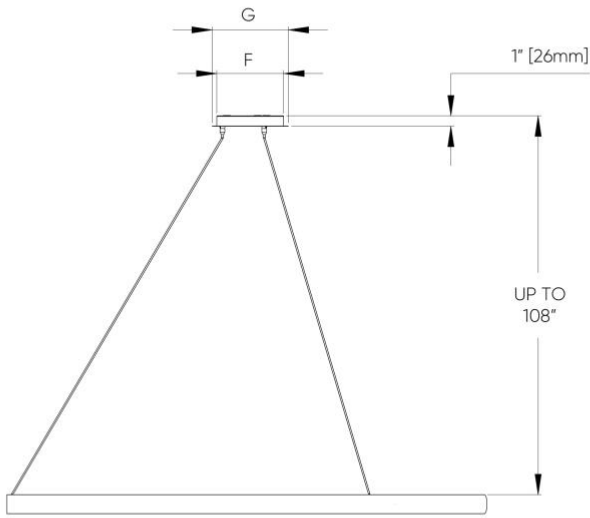




PROFILE DIMENSIONS

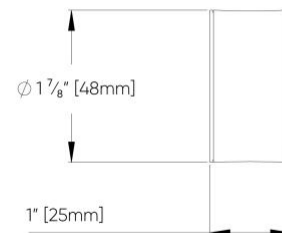


LUMINAIRE DIMENSIONS

Nominal Size	D (Actual Diameter)	E (Sector Angle)	F (Canopy Size)	G (Canopy Cover Size)	No. of Suspensions
2FT	24 $\frac{5}{8}" [626mm]$	300°	6 $\frac{5}{8}" [168mm]$	7 $\frac{1}{2}" [191mm]$	3
3FT	36" [915mm]	300°	6 $\frac{5}{8}" [168mm]$	7 $\frac{1}{2}" [191mm]$	3
4FT	48" [1219mm]	320°	6 $\frac{5}{8}" [168mm]$	7 $\frac{1}{2}" [191mm]$	4
5FT	60" [1524mm]	320°	10 $\frac{5}{8}" [270mm]$	11 $\frac{1}{2}" [292mm]$	4
6FT	72" [1829mm]	330°	10 $\frac{5}{8}" [270mm]$	11 $\frac{1}{2}" [292mm]$	6
7FT	84" [2134mm]	330°	10 $\frac{5}{8}" [270mm]$	11 $\frac{1}{2}" [292mm]$	6

300-Deg Direct & Direct/Indirect - SS9-Hub (Integral Drivers)

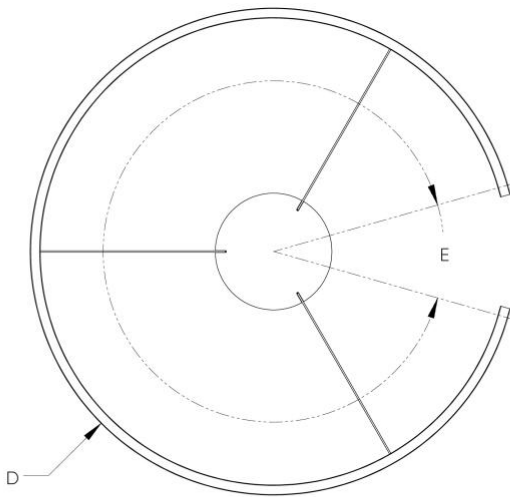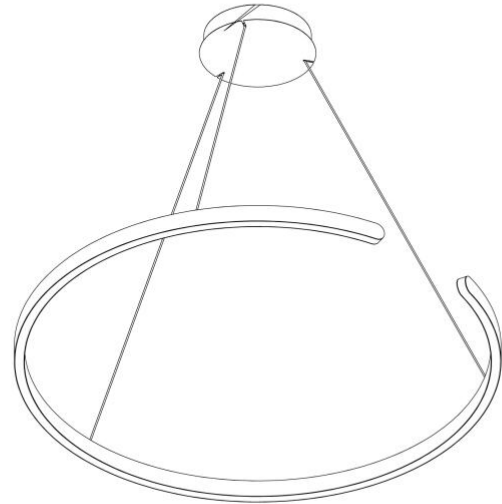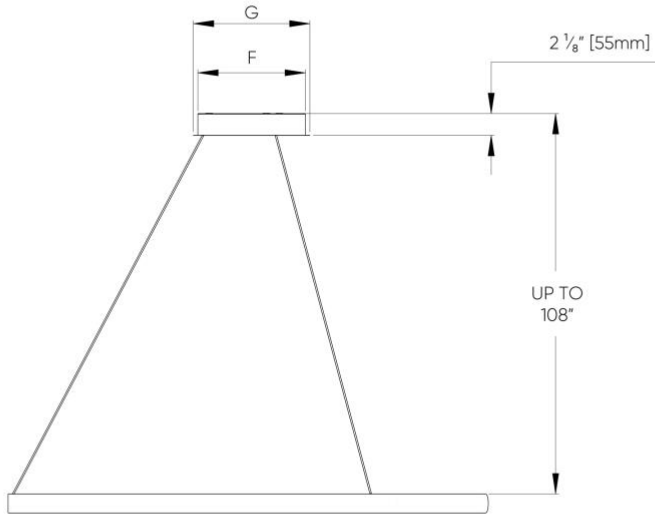

PROFILE DIMENSIONS

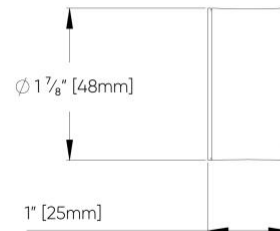

LUMINAIRE DIMENSIONS

Nominal Size	D (Actual Diameter)	E (Sector Angle)	F (Canopy Size)	G (Canopy Cover Size)	No. of Suspensions
2FT	24 5/8" [626mm]	300°	10 5/8" [270mm]	11 1/2" [292mm]	3
3FT	36" [915mm]	300°	10 5/8" [270mm]	11 1/2" [292mm]	3
4FT	48" [1219mm]	320°	10 5/8" [270mm]	11 1/2" [292mm]	4
5FT	60" [1524mm]	320°	13 1/2" [342mm]	14 3/8" [365mm]	4
6FT	72" [1829mm]	330°	13 1/2" [342mm]	14 3/8" [365mm]	6
7FT	84" [2134mm]	330°	13 1/2" [342mm]	14 3/8" [365mm]	6