

1 IMPORTANT NOTE

Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 VERTICAL REMOTE POS (SS5) – 2" CANOPY INSTALLATION

JUNCTION BOX INSTALLATION

STEP 1

Insert the mounting plate through the ceiling opening with the PEM nuts oriented upward. (FIG 1)

STEP 2

Install the side brackets to secure the plate in position and prevent movement. If the brackets are larger than the ceiling thickness, fill the gap accordingly. (FIG 2)

STEP 3

Insert the junction box through the open section and fasten it to the plate gently to avoid shifting the plate. (FIG 3)

NOTE

The junction box vertical screw joins the two box sections and allows suspension for certain ceiling types. (FIG 4)

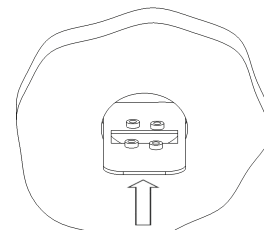


FIG 1

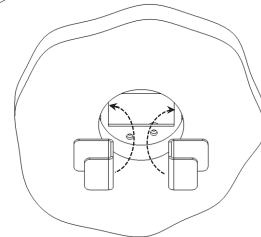


FIG 2

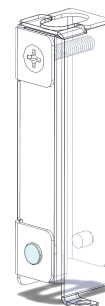


FIG 4

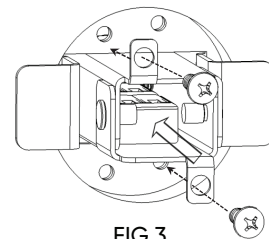


FIG 3

STEP 1

Attach gripper. Remove ring, slide ring and canopy cover on cable.

STEP 2

Connect wires and secure bracket.

STEP 3







Adjust cable to level fixture.

STEP 4

Push the brackets inward until positioned within the canopy cover's footprint.

STEP 5

Slide canopy up and thread ring.

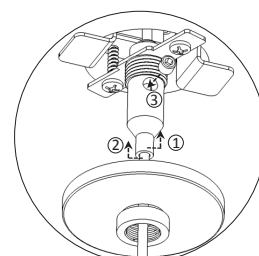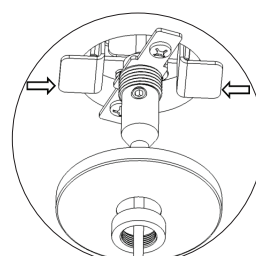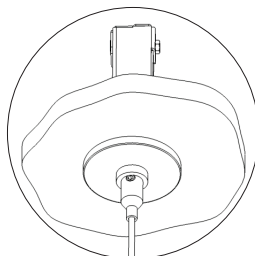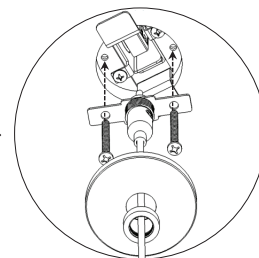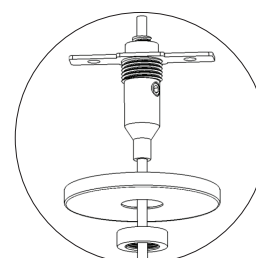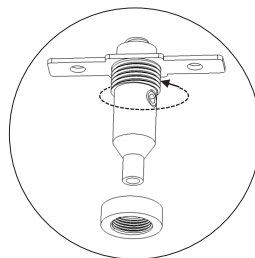

① Press top
② Set height
③ Tighten screw.

3 VERTICAL REMOTE POS (SS6) – 4" CANOPY INSTALLATION

STEP 1

Attach gripper. Remove ring, slide ring and canopy cover on cable.

STEP 2

Connect wires and secure bracket.

STEP 3


Adjust cable to level fixture.

STEP 4

Slide canopy up and thread ring.

NOTE

Secure junction box to structure with hardware suited to ceiling type.

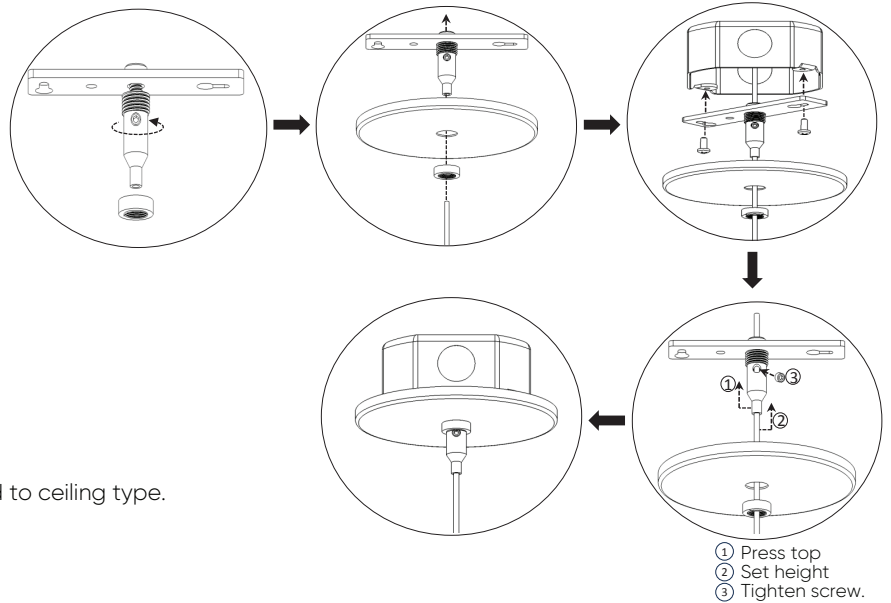

4 REMOTE DRIVER BOX FOR SS5/SS6 SUSPENSION

STEP 1

Remove the screws and the drivers' box cover

STEP 2

Remove the necessary knockouts

STEP 3

Attach the conduits "NOT SUPPLIED"

STEP 4

Make the wiring connections

STEP 5

Re-attach the cover and secure it with the supplied screws

NOTE

Use the mounting brackets to secure the box in place to the structure of the ceiling (mounting screws by others)

Never touch the yellow portion of the led chip or damage may occur

When more than one remote box is supplied, they all must be connected to the same power supply branch circuit

Remote boxes should be accessible after installation

